

## DETAILS


<b>Ordering Number</b>	CA11348_STRADA-C
<b>Family</b>	Strada-C
<b>Type</b>	Assembly
<b>Color</b>	clear
<b>Diameter</b>	19,6 x 15,6 mm
<b>Height</b>	6,8 mm
<b>Style</b>	rectang
<b>Optic Material</b>	PMMA
<b>Holder Material</b>	
<b>Fastening</b>	screw, pin, tape
<b>Status</b>	ready
<b>ROHS Compliant</b>	Yes
<b>Date Updated</b>	27/06/2013




## OPTICAL PROPERTIES

LED	Viewing Angle	Light Beam	Efficiency	cd/lm
6J (GTDW16)	(simulated) 122		(simulated) 93 %	(simulated) 0.330
3J (GSPW16)	(simulated) 122		(simulated) 93 %	(simulated) 0.310
CL-L400	122 degrees		91 %	(simulated) 0.000
NS6x83	128 degrees		91 %	0.250
NS3x83	128 degrees		91 %	0.250

Relative intensity of CA11348\_Strada-C-6N83-tape-CL-L400

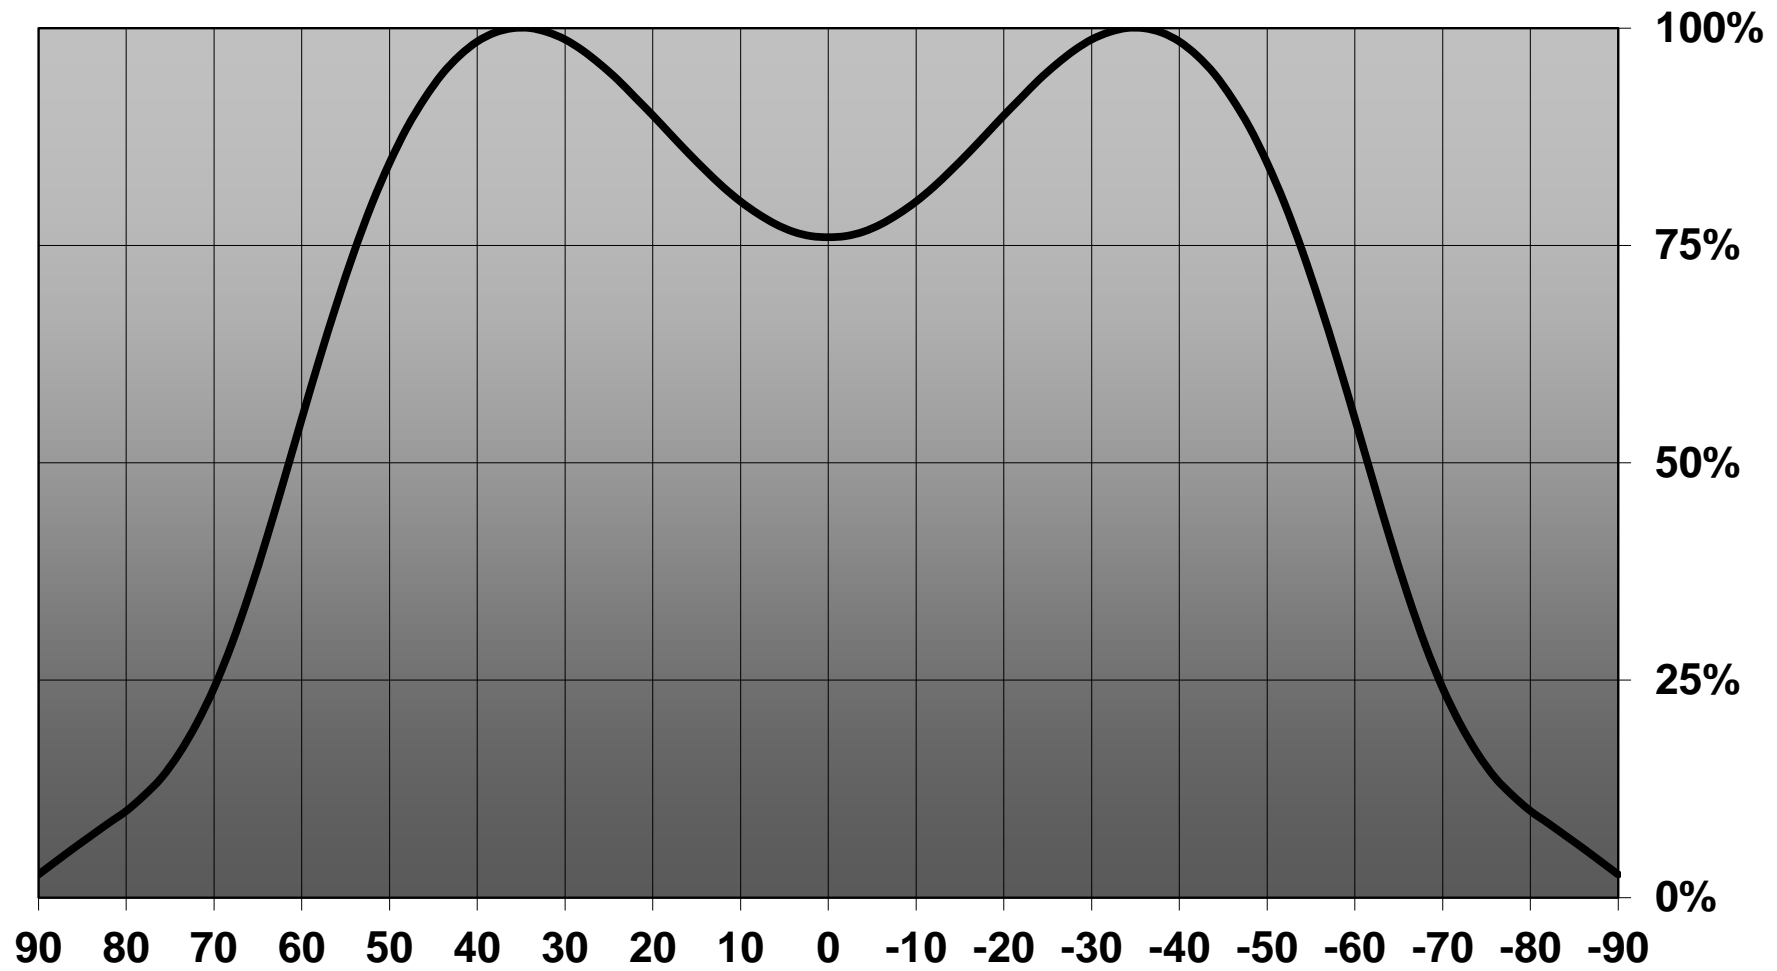


Luminaire: LEDiL Oy CA11348\_STRADA-C (OLP-5065F6L-06A) Eff. 93%  
Lamps: 1 x OPTOGAN OLP-5065F6L-06A-80-D05O0 110lm@250mA CCT=5000K P=0,778 I=250mA

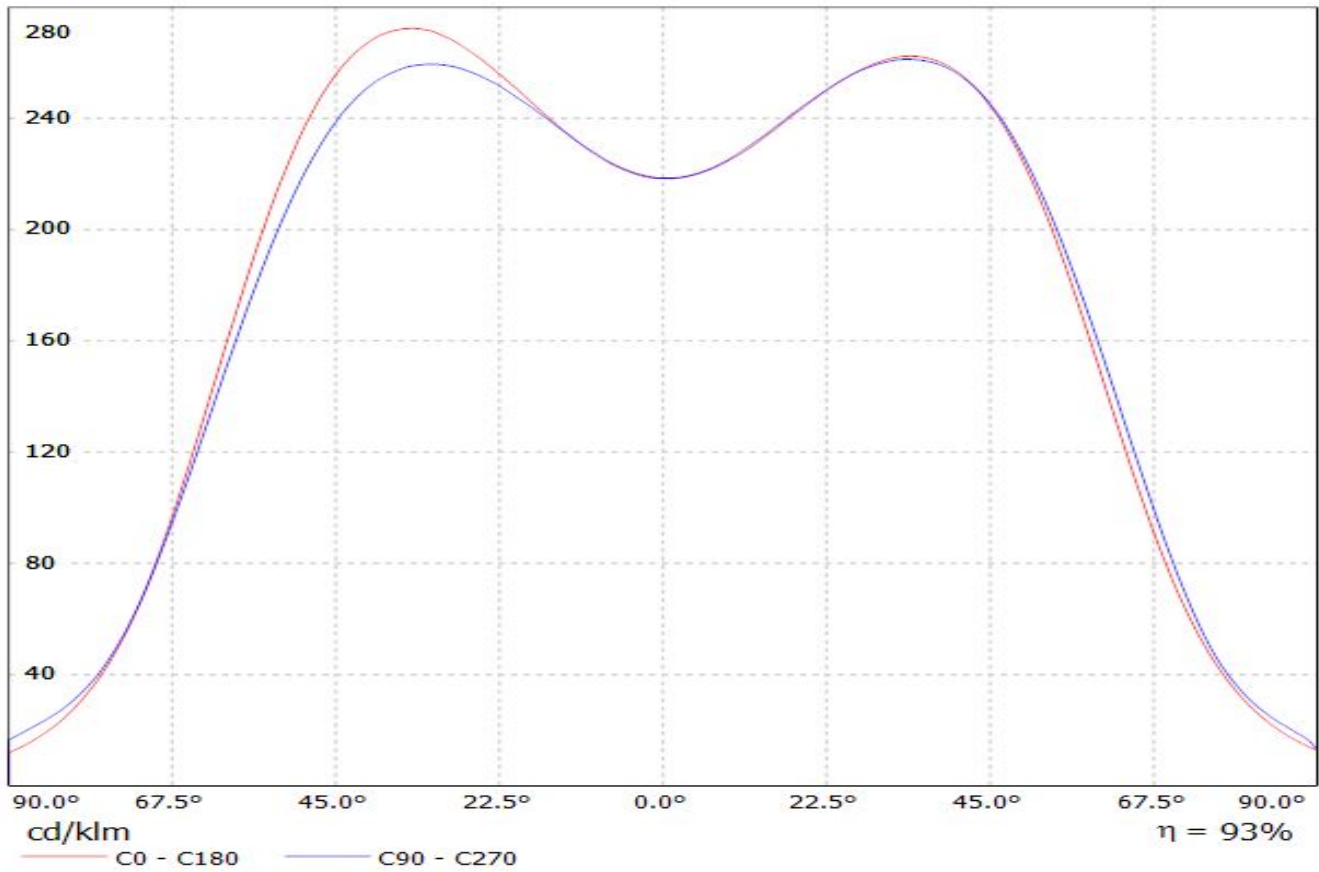

Luminaire: LEDiL Oy CA11348\_STRADA-C (OLP-5065F6L-06A) Eff. 93%

Lamps: 1 x OPTOGAN OLP-5065F6L-06A-80-D0500 110lm@250mA CCT=5000K P=0,778 I=250mA

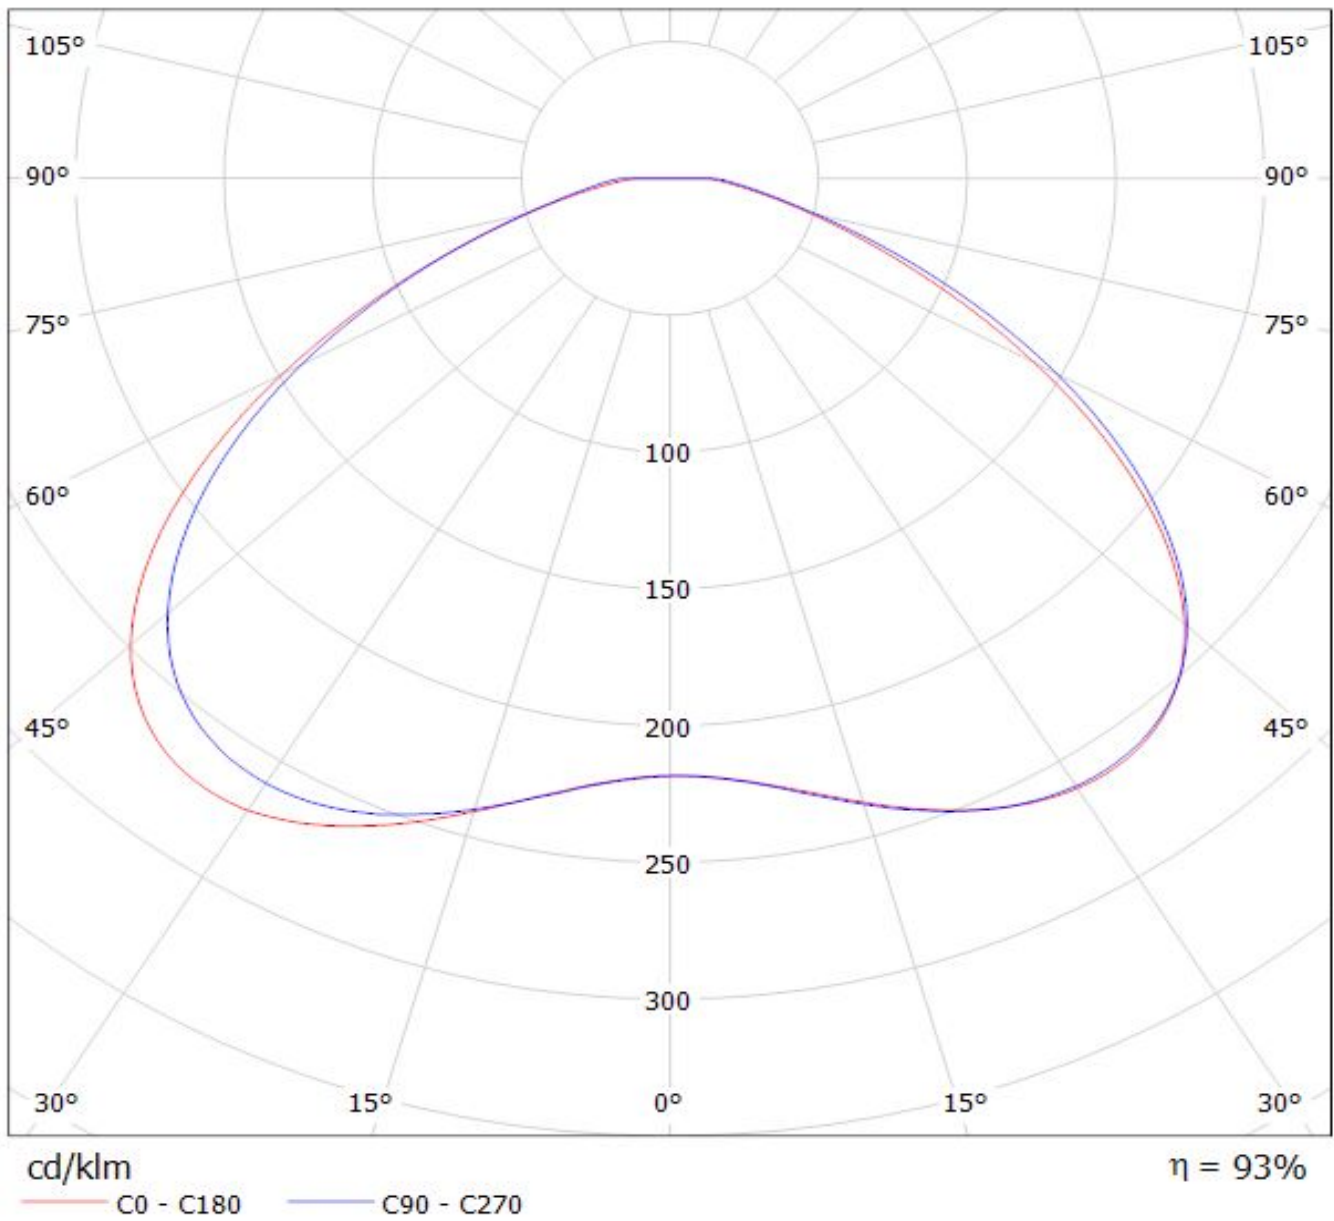

**NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.**