

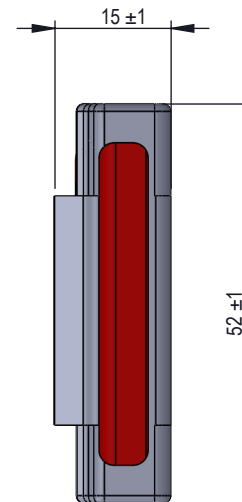
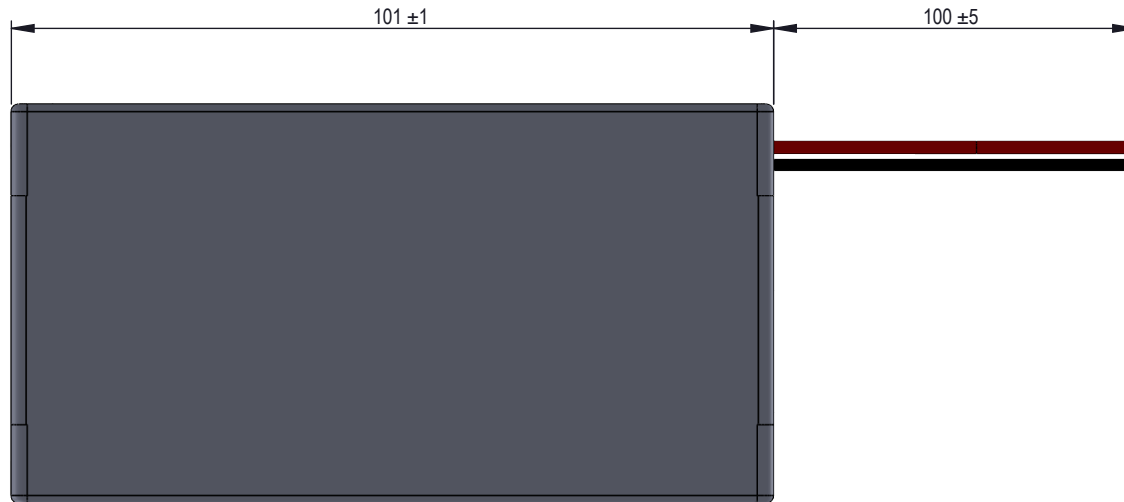



Specifications

Nominal Voltage [V]	11.1	
Minimum capacity [mAh]	1850	
Typical capacity [mAh]	1950	
Charging voltage [V]	12.6	
Size [mm]	According to the drawing	
Weight [g]	150 ± 25	
Typical charge [mA]	370 (16 hrs)	
Rapid charge [mA]	1295 (temp. 20 °C)	
Standard continuous discharge current [mA]	3500 (temp. 20 °C)	
Charge temperature	Typical	0 °C do 45 °C
Discharge temperature	Continous	-20 °C do 60 °C
Storage temperature	Recommended	-20 °C do 35 °C

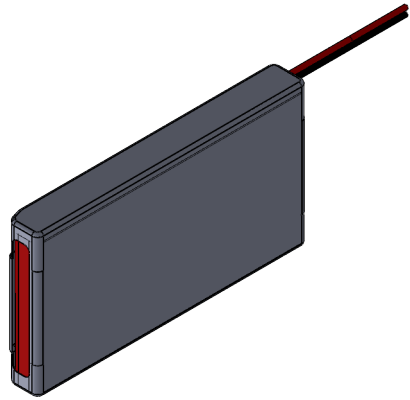

LABEL: 50x30mm

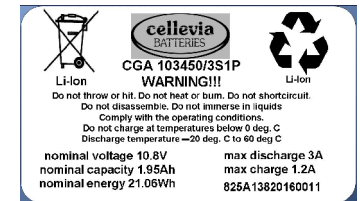

Material/ Materiał:	Scale/ Skala: 1:1	Format/ Format arkusza: A4	Weight/ Masa:	Sheet/ Arkusz: /	Version/ Wersja: _
Finishing/ Wykończenie : _	Date/ Data:				Revision/ Rewizja: _
Designed by/ Konstruował:					ERP system number:
Checked by/ Sprawdził:					101372
Approved by/ Zatwierdził:					
Update/ Aktualizował:	Update/ Data aktualizacji:	Date of implementation/ Data wykonania:	Product reference/ Nazwa:	Docum. number/ Nr rysunku:	
J.Dadacz		2016-09-28	CGA103450/3S1P 3S1P CGA103450A		