





81505150-Positive output



Symbol

Orifice diameter mm	2,5
Flow at 4 bars NI/min	170
Hysteresis 50→500 mb	60 mb
Hysteresis 0,1→2,5 b	100 mb
Hysteresis 2→8 b	320 mb
Connection - Sub-base	✓
Operating temperature (° C)	-5 + 50
Mechanical life (operations)	3.10 ⁶
Weight (g)	160
Accuracy 0,1→2,5 mb	10%
Accuracy 2→8 b	4%
Accuracy 50→500 mb	4%

Dimension Diagram :

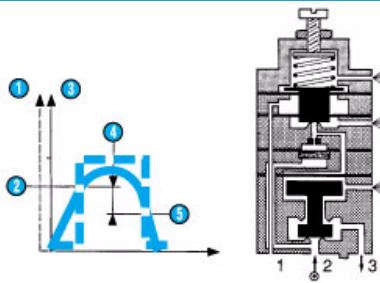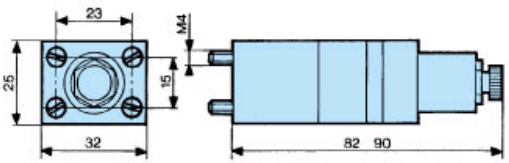

N° Legend

Curves :



N° Legend

- 1
- 2
- 3
- 4
- 5

