



88225012-6 s 12 min



- ✓ Multi-function
- ✓ Multi-range
- ✓ Mono-voltage
- ✓ 1 timed changeover + 1 instantaneous contact
- ✓ Elapsed time can be saved mechanically in the event of a break in supply
- ✓ Progress of a cycle displayed
- ✓ Housing for DIN rail mounting

Precision limit error

Repetition accuracy	±1,5% (±4% / 6 s)
Reset time	0,20 s

Timed two-pole

Instantaneous single pole	1
Thermal rating	6,3 A
Rating (cos φ = 0.41) 10 ⁴ operations	5 A - 230 V

Voltage variation at maximum temperature of 55 °C according to IEC 255 100


Absorbed power-motor	3 VA cos μ 0,7
Operator factor	100%
Operating temperature range (°C)	-10 → +55 °C
Storage temperature range (°C)	-20 → +70 °C
Environmental protection Tropicalised to IEC 68-2-10	✓
Vibration withstand on 3 axes (Veritas standard)	4 G - 55 Hz
Dielectric test voltage according to IEC 255 5 or VDE 0435	1000 V - Un ≤ 60 V 2000 V - Un > 60 V
Insulation according to standard VDE 0110 group C	380 V AC - 440 V DC
Protection Housing	IP 40
Degree of terminal protection	IP 10
Conformity to standards NFC 45250 - VDE 0110 - 0435 - 0660 or ICE 255 - 1 - 00	✓
Connection: By screws in front face with self-lifting grips	✓
Terminal capacity Single-wire	(1-2) x 0,75 - 2,5 mm ²
Terminal capacity: Multi-wire with self-crimping ferrules	(1-2) x 0,75 - 2,5 mm ²
Mounting by screw	2 x M5
Mounting: on symmetrical DIN rail 35 mm (EN 50002)	✓
Weight (g)	185

Accessories

Code

84861501
84861503

Dimension Diagram :

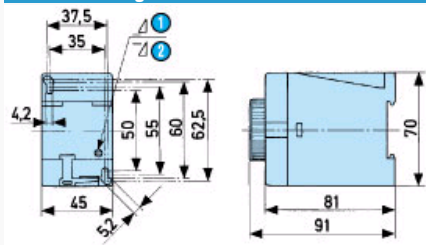


N°

1
2

Legend


With memory
Without memory

Dimension Diagram :

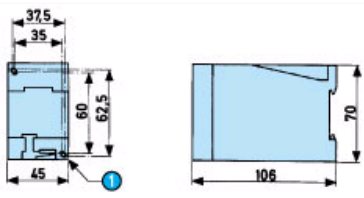


N°	Legend
1	Fixing holes $\varnothing 5$

Curves : Function 2




Function n°2

Curves : Function 3




Function n°3

Curves : Function 4




Function n°4


: Function 2




: Function 3




: Function 4



: Internal layout



: Terminal identification



N°

15 - 16 - 18
23 - 24

Legend

A1 - A2 Supply
Timed contact
Instantaneous contact