

HSK-B cable gland

anti-kink



HSK-B

With anti-bend spirals

- Easy to assemble
- Completely water-tight
- Optimum strain relief
- Large clamping areas

Application

- Plant and machine construction
- Robot construction
- Automation technology
- Vehicle construction and shipbuilding
- Rail technology
- Installation technology
- Control cabinet construction

Material

Polyamide
Moulded seal: NBR


- halogen-free
- phosphor-free
- silicone-free
- cadmium-free

Technical data

Protection class: IP 68 - 10 bar / IP 69K (within the specific clamping range with additional o-ring)

Temperature range: -40°C up to +100°C

Test standard: EN50262

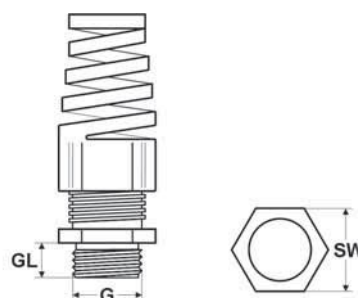

Dimensions

- G Thread size
- GL Thread length
- SW Spanner size

metric thread

| Part no. light grey RAL 7035 | Part no. black RAL 9005 | Size Metr. | Cable Ø from / to mm | Thread length mm | Spanner size mm | Unit | Net EUR/100 items at a purchase of | | |
|------------------------------------|-------------------------------|---------------|----------------------------|------------------------|-----------------------|------|------------------------------------|-----------|------------|
| | | | | | | | up to 100 | 101 - 500 | 501 - 1000 |
| 98005 | 98011 | M12 x 1,5 | 3,0 - 6,5 | 8,0 | 15 | 50 | o. r. | o. r. | o. r. |
| 98006 | 98012 | M16 x 1,5 | 4,0 - 8,0 | 8,0 | 19 | 50 | o. r. | o. r. | o. r. |
| 98008 | 98014 | M20 x 1,5 | 6,0 - 12,0 | 9,0 | 24 | 50 | o. r. | o. r. | o. r. |
| 98009 | 98015 | M20 x 1,5 | 10,0 - 14,0 | 9,0 | 27 | 25 | o. r. | o. r. | o. r. |
| 98010 | 98016 | M25 x 1,5 | 13,0 - 18,0 | 11,0 | 33 | 20 | o. r. | o. r. | o. r. |

PG thread

| Part no. light grey RAL 7035 | Part no. black RAL 9005 | Size PG | Cable Ø from / to mm | Thread length mm | Spanner size mm | Unit | Net EUR/100 items at a purchase of | | |
|------------------------------------|-------------------------------|------------|----------------------------|------------------------|-----------------------|------|------------------------------------|-----------|------------|
| | | | | | | | up to 100 | 101 - 500 | 501 - 1000 |
| 90320 | 90326 | 7 | 3,0 - 6,5 | 8,0 | 15 | 50 | o. r. | o. r. | o. r. |
| 90321 | 90327 | 9 | 4,0 - 8,0 | 8,0 | 19 | 50 | o. r. | o. r. | o. r. |
| 90322 | 90328 | 11 | 5,0 - 10,0 | 8,0 | 22 | 50 | o. r. | o. r. | o. r. |
| 90323 | 90329 | 13,5 | 6,0 - 12,0 | 9,0 | 24 | 50 | o. r. | o. r. | o. r. |
| 90324 | 90330 | 16 | 10,0 - 14,0 | 10,0 | 27 | 25 | o. r. | o. r. | o. r. |
| 90325 | 90331 | 21 | 13,0 - 18,0 | 11,0 | 33 | 20 | o. r. | o. r. | o. r. |

NPT thread

| Part no. light grey RAL 7035 | Part no. black RAL 9005 | Size NPT | Cable Ø from / to mm | Thread length mm | Spanner size mm | Unit | Net EUR/100 items at a purchase of | | |
|------------------------------------|-------------------------------|-------------|----------------------------|------------------------|-----------------------|------|------------------------------------|-----------|------------|
| | | | | | | | up to 100 | 101 - 500 | 501 - 1000 |
| 92300 | 92305 | 3/8" | 4,0 - 8,0 | 15,0 | 22 / 19 | 50 | o. r. | o. r. | o. r. |
| 92301 | 92306 | 1/2" | 6,0 - 12,0 | 13,0 | 24 | 50 | o. r. | o. r. | o. r. |
| 92302 | 92307 | 1/2" | 10,0 - 14,0 | 13,0 | 27 | 25 | o. r. | o. r. | o. r. |
| 92303 | 92308 | 3/4" | 13,0 - 18,0 | 14,0 | 33 | 20 | o. r. | o. r. | o. r. |

Dimensions and specifications may be changed without prior notice.

o. r. = on request