




1 2 3 4 5 6

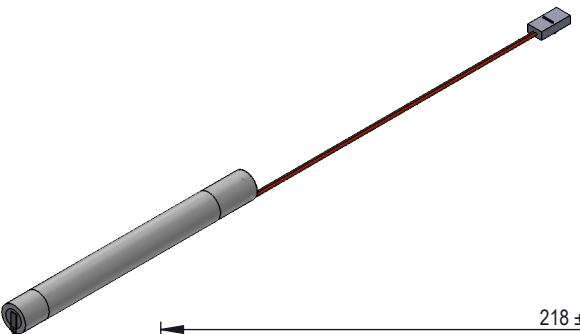

Specifications		
Nominal Voltage [V]	6	
Typical capacity [mAh]	1500	
Size [mm]	According to the drawing	
Typical charge [mA]	150 (15 hrs)	
Standard continuous discharge current [mA]	750 (temp. 20°C)	
Charge temperature	Typical	0°C do 60°C
Discharge temperature	Continous	-20°C do 70°C
Storage temperature	Recommended	-20°C do 45°C

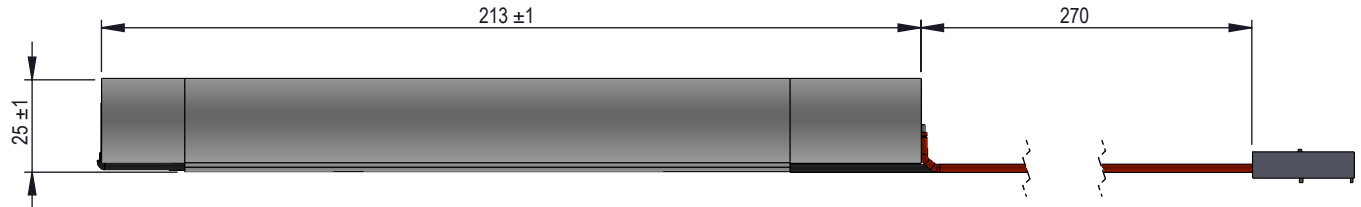

Label: 50x30mm



SDZIAL_BADAN_I_ROZWOJU/PUBLICZNYPROJEKTNIEMADZOCROWANEPRZEZDTIME(277532)_SSIP_BD-SC1500H6.00V_1.50Ah_cyl

A

B

C

D

A

B

C

D

Material/ Materiał:	Scale/ Skala: 1:2	Format/ Format arkusza: A4	Weight/ Masa:	Sheet/ Arkusz: /	Version/ Wersja: _
Finishing/ Wykończenie: _	Date/ Data:				Revision/ Rewizja: _
Designed by/ Konstruował:					ERP system number: 277532
Checked by/ Sprawdził:					
Approved by/ Zatwierdził:					
Update/ Aktualizował: J. Dadacz	Update/ Data aktualizacji:	Date of implementation/ Data wykonania: 2016-10-10	Product reference/ Nazwa: 5S1P BD-SC1500H 6.00V 1,50Ah cyl ACCU-SC/5	Docum. number/ Nr rysunku:	

1 2 3 4 5 6