


## BN 3334

Cross recessed pan head screws  
Pozidriv Z

DIN 7985 A  
~ISO 7045  
~UNI 7687

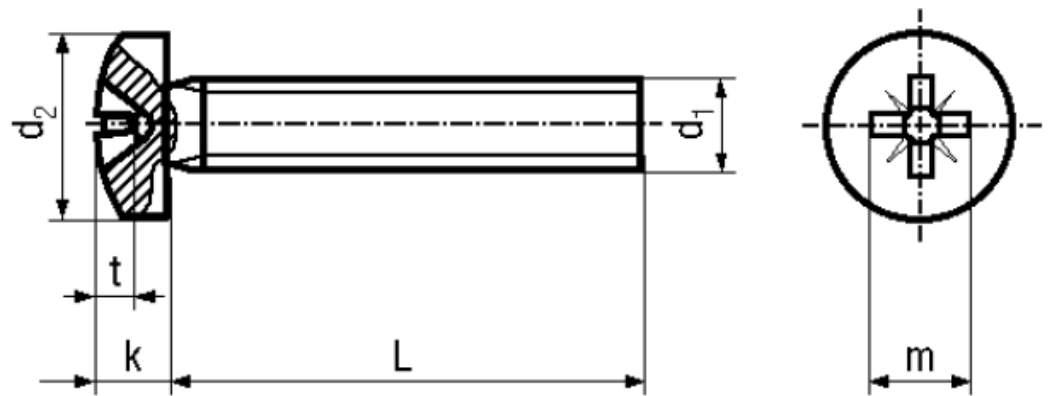

|          |                         |                  |                  |
|----------|-------------------------|------------------|------------------|
| Material | <b>Steel</b>            | Quality          | <b>4.8</b>       |
| Surface  | <b>zinc plated blue</b> | Tensile strength | <b>400 N/mm2</b> |

### Article No. - 1538543

|                     |      |
|---------------------|------|
| d <sub>1</sub>      | M2,5 |
| L                   | 12   |
| d <sub>2</sub> max. | 5    |
| k max.              | 2,12 |
| Pozidriv            | 1    |
| m~                  | 2,6  |
| t min.              | 1,27 |
| t max.              | 1,52 |

DIN 7985 A: Standard withdrawn  
All lengths fully threaded.