

BN 388

Cross recessed flat countersunk


head screws

Phillips H

DIN 965 A

~ISO 7046

~UNI 7688

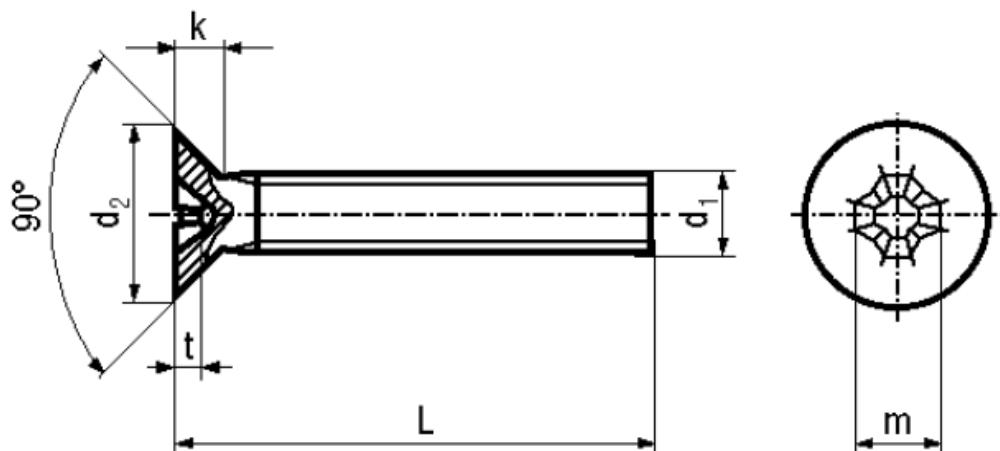

Material	Steel	Tensile strength	400 N/mm ²
Surface	zinc plated blue	Elongation after fracture	min. 14%
Quality	4.8		

Article No. - 1156322

d ₁	M2
L	5
d ₂ max.	3,8
k max.	1,2
Phillips	1
m~	2,35
t min.	0,95
t max.	1,25

DIN 965 A: Standard withdrawn and replaced under European standardization by the corresponding ISO standard.

All lengths fully threaded.

DIN 965 A Prozidriv cross recess (Type Z) see BN 3333