


## BN 388

Cross recessed flat countersunk  
head screws  
Phillips H

DIN 965 A  
~ISO 7046  
~UNI 7688

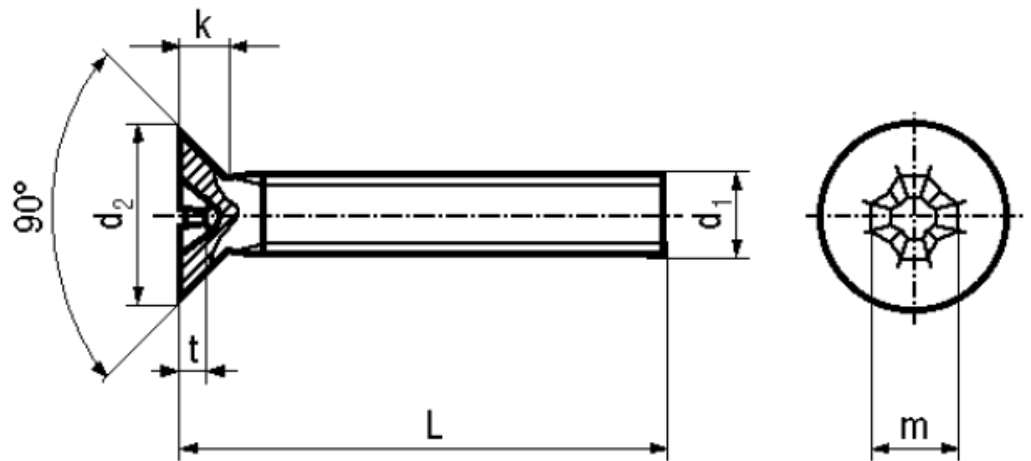

Material	<b>Steel</b>	Tensile strength	<b>400 N/mm<sup>2</sup></b>
Surface	<b>zinc plated blue</b>	Elongation after fracture	<b>min. 14%</b>
Quality	<b>4.8</b>		

### Article No. - 1156594

d <sub>1</sub>	(M3,5)
L	10
d <sub>2</sub> max.	6,5
k max.	1,93
Phillips	2
m~	3,9
t min.	1,4
t max.	1,9

DIN 965 A: Standard withdrawn and replaced under European standardization by the corresponding ISO standard.  
All lengths fully threaded.

DIN 965 A Prosidriv cross recess (Type Z) see BN 3333