


## BN 388

Cross recessed flat countersunk head screws  
Phillips H

DIN 965 A  
~ISO 7046  
~UNI 7688

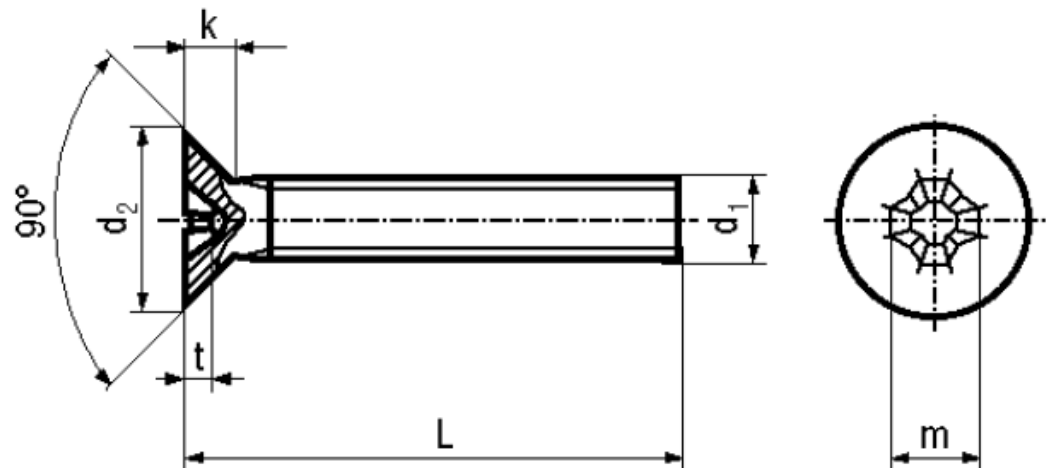

Material	Steel	Tensile strength	400 N/mm <sup>2</sup>
Surface	zinc plated blue	Elongation after fracture	min. 14%
Quality	4.8		

### Article No. - 1156608

d <sub>1</sub>	(M3,5)
L	12
d <sub>2</sub> max.	6,5
k max.	1,93
Phillips	2
m~	3,9
t min.	1,4
t max.	1,9

DIN 965 A: Standard withdrawn and replaced under European standardization by the corresponding ISO standard.  
All lengths fully threaded.

DIN 965 A Prozdřiv cross recess (Type Z) see BN 3333