


BN 388

Cross recessed flat countersunk head screws
Phillips H

DIN 965 A
~ISO 7046
~UNI 7688

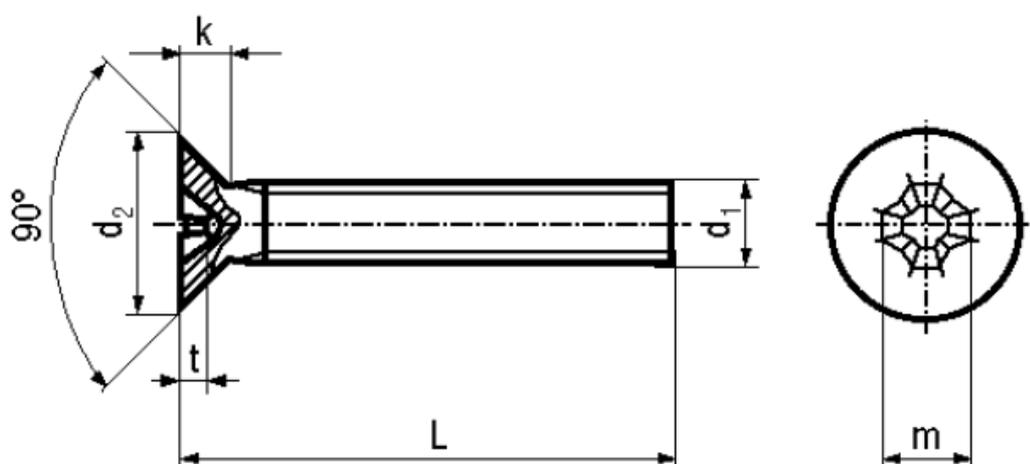

Material	Steel	Tensile strength	400 N/mm ²
Surface	zinc plated blue	Elongation after fracture	min. 14%
Quality	4.8		

Article No. - 1156497

d ₁	M3
L	(14)
d ₂ max.	5,6
k max.	1,65
Phillips	1
m~	2,9
t min.	1,5
t max.	1,8

DIN 965 A: Standard withdrawn and replaced under European standardization by the corresponding ISO standard.
All lengths fully threaded.

DIN 965 A Prozidriv cross recess (Type Z) see BN 3333