


BN 3310

Cross recessed flat countersunk
head screws
Pozidriv Z

DIN 965 A
~ISO 7046
~UNI 7688

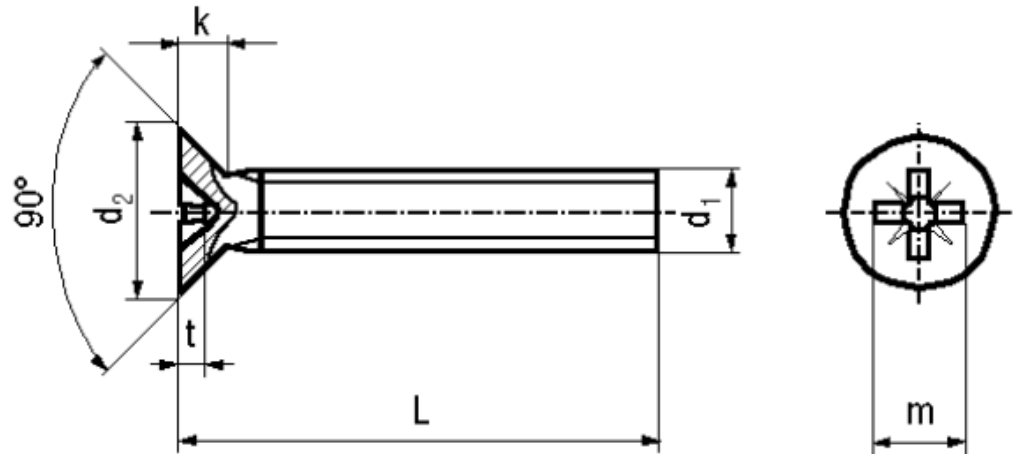

| | | | |
|----------|-----------------|---------|----|
| Material | Stainless steel | Quality | A4 |
|----------|-----------------|---------|----|

Article No. - 1544209

| | |
|----------------|------|
| d ₁ | M3 |
| L | 8 |
| d ₂ | 5,6 |
| k max. | 1,65 |
| Pozidriv | 1 |
| m~ | 2,8 |
| t min. | 1,48 |
| t max. | 1,73 |

DIN 965: Standard withdrawn

All lengths fully threaded
Countersink must be designed according to the corresponding standard!

Screwdriver Bits 1/4": BN 31514 and BN 31516 / CG 1.