
## **BOSSARD**

## **BN 11**

Hexagon socket head cap screws fully threaded fully threaded

DIN 912 ISO 4762

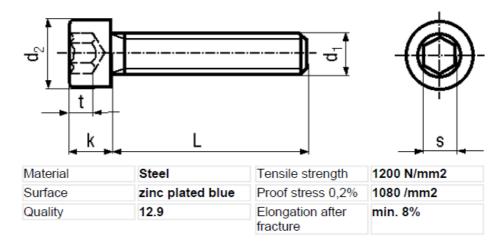

Article No 1011995	
d <sub>1</sub>	M3
L	16
d <sub>2</sub>	5,5
k	3
S	2,5
t min.	1,3

DIN 912: Standard withdrawn

Connecting elements of classes >= 10.9/10 (>= HV320) are at risk from brittle fracture due to metal deposition from aqueous solutions (electroplating).

Depending on the production possibilities, they are therefore supplied from stock with an inorganic zinc coating.