


BN 3333

Cross recessed flat countersunk
head screws
Pozidriv Z

DIN 965 A
~ISO 7046
~UNI 7688

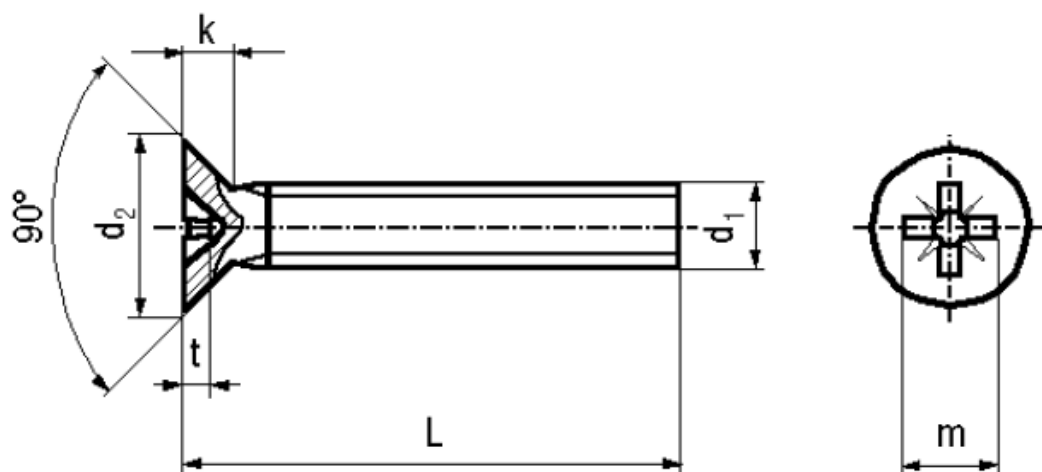

Material	Steel	Quality	4.8
Surface	zinc plated blue	Tensile strength	400 N/mm ²

Article No. - 1537040

d ₁	M4
L	10
d ₂ max.	7,5
k max.	2,2
Pozidriv	2
m~	4
t min.	1,6
t max.	2,06

DIN 965 A: Standard withdrawn

DIN 965 A Phillips cross recess (Type H) see BN 388, BN 8167.

All lengths fully threaded.