


BN 388

Cross recessed flat countersunk
head screws
Phillips H

DIN 965 A
~ISO 7046
~UNI 7688

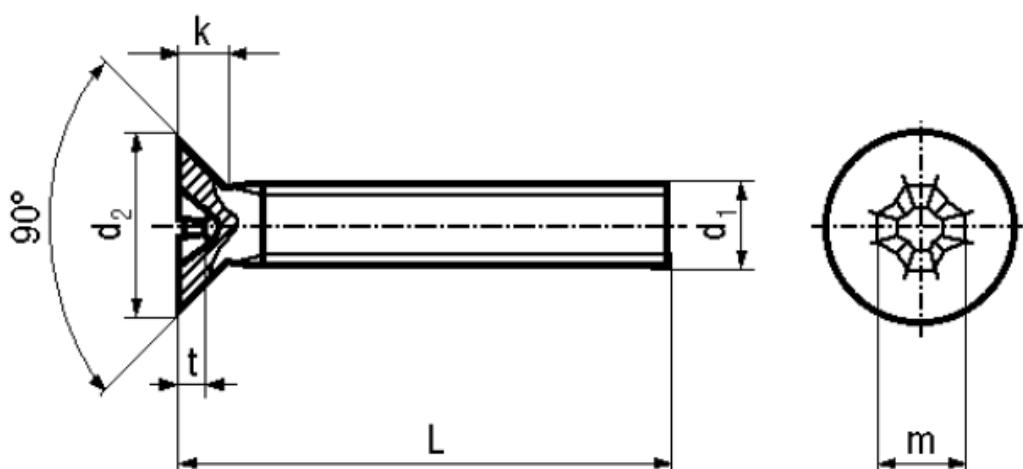

| | | | |
|----------|------------------|---------------------------|-----------------------|
| Material | Steel | Tensile strength | 400 N/mm ² |
| Surface | zinc plated blue | Elongation after fracture | min. 14% |
| Quality | 4.8 | | |

Article No. - 1156969

| | |
|---------------------|-----|
| d ₁ | M5 |
| L | 45 |
| d ₂ max. | 9,2 |
| k max. | 2,5 |
| Phillips | 2 |
| m~ | 4,6 |
| t min. | 2,1 |
| t max. | 2,6 |

DIN 965 A: Standard withdrawn and replaced under European standardization by the corresponding ISO standard.
All lengths fully threaded.
DIN 965 A Prozidriv cross recess (Type Z) see BN 3333