


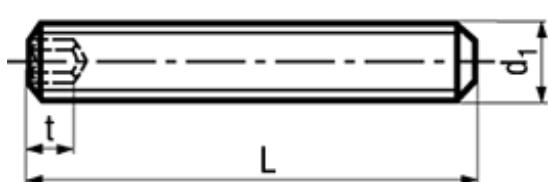

ISO 4026

DIN 913

45 H

**BN 28****Hex socket set screws**

with flat point

Steel 45 H

zinc plated blue

- ~UNI 5923
- ~CSN 021187



Fasteners property class  $\geq$  33 H electroplated coatings:  
Susceptible to hydrogen embrittlement! Further notice to  
residual risks can be found in the introduction section (I). Set  
screws are not intended to be tensile-loaded.

Article#	d <sub>1</sub>	s	t min.	L
1034286	M3	1,5	1,2	3
1034294			2	4
1034308				5
1034316				6
1034324				8
1034332				10
1034340				12
1034359				(14)
1034375				16
1034391				20
3055864				25
1034405	M4	2	1,5	4
1034413			2,5	5
1034421				6
1034448				8
1034456				10
1034464				12
1034472				(14)
1034499				16
1034502				(18)
1034510				20
1034677				(22)
1034529				25
1034537				30

Article#	d1	s	t min.	L
1034553	M5	2,5	2	5
1034561	M5	2,5	3	6
1034588				8
1034596				10
1034618				12
1034626				(14)
1034642				16
1034669				20
1034693				25
1034707				30
1034715				35
1034723				40
3055865				50
1034758	M6	3	2	5
1034766				6
1034774			3,5	8
1034782				10
1034790				12
1034804				(14)
1034820				16
1034847				20
1034863				25
1034871				30
1034898				35
1034901				40
1034928				45
1034936				50
3055867				60