




	<b>DIN 7985 A</b>	<b>~ISO 7045</b>		<b>4.8</b>
---	-------------------	------------------	--	------------


Norm  
zurückgezogen

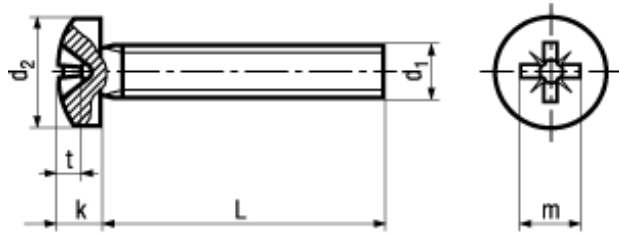

<b>BN 30502</b>
<b>Linsenschrauben</b>
mit Kreuzschlitz Pozidriv Form Z
Stahl 4.8
verzinkt-schwarz
<ul style="list-style-type: none"> <li>• ~UNI 7687</li> <li>• ~CSN 021147</li> </ul>

 Alle Längen Gewinde ~ bis Kopf

Article#	d <sub>1</sub>	d <sub>2</sub> max.	k max.		m~	t min.	t max.	L
5401256	M2,5	5	2,12	1	2,6	1,27	1,52	5
5401257								6
5401258								8
5401259								10
5401260	M3	6	2,52	1	3	1,68	1,93	5
5002028								6
5401261								8
5401262								10
5002044								12
5002052								16
5402902								20
5402903								25
5402904								30
5402905								35
5402906								40
5402907								45
5402908								50
5002095	M4	8	3,25	2	4,3	1,9	2,36	6
5401263								8
5002087								10
5401264								12
5402909								16

Article#	d <sub>1</sub>	d <sub>2</sub> max.	k max.		m~	t min.	t max.	L
5402910	M4	8	3,25	2	4,3	1,9	2,36	20
5402911								25
5402912								30
5402913								35
5402914								40
5402915								45
5402916								50
5402917								60
5402918								70
5401265	M5	10	3,95	2	5	2,64	3,1	8
5401266								10
5401267								12
3303539								16
5401268	M6	12	4,75	3	6,7	3,02	3,48	10
5401269								12
5401270								16