


	ISO 4026	DIN 913	TufLok®	45 H
-----------------------------------------------------------------------------------	----------	---------	---------	------

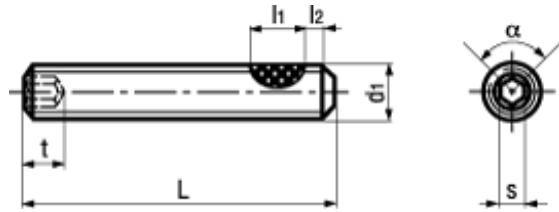

BN 5210
Hex socket set screws
with flat point and TufLok® patch
Steel 45 H
zinc plated blue
<ul style="list-style-type: none"> • ~UNI 5923 • ~CSN 021187

! ISO 4042
 Fasteners hardness ≥ 320 HV with electroplated coatings:
 Susceptible to hydrogen embrittlement!
 Further notice to residual risks can be found in the introduction section.

Set screws are not intended to be tensile-loaded.

i Coating angle α in the screw body area approx. 90° .
 Edge zone (spray transition) up to 180° .
 Coating length $l_1 = \sim 4$ to 6 thread turns.
 Around 1 to 2 thread turns remain uncoated to ensure flawless installation (l_2).

Article#	d ₁	s	t min.	L
1380052	M3	1,5	2	6
1380060				8
1380079				10
1380087				12
3136526	M4	2	2,5	5
1380095				6
1380109				8
1380117				10
1380125				12
1380133				16
1576305	M5	2,5	3	6
1380141				8
1380168				10
1380176				12
1380184				16
1380192				20
1576313	M6	3	2	6
1380206			3,5	8
1380214				10
1370545				12
1370553				16
1370561				20