




**DIN 84 A**

**~ISO 1207**

Norme abrogée

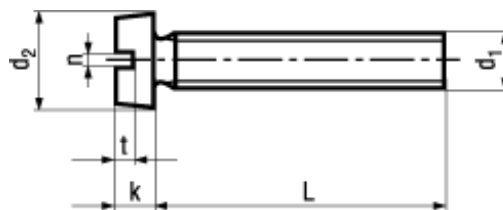

**BN 533**

**Vis à tête cylindrique**

à fente

Laiton

nickelé

- ~UNI 6107
- ~CSN 021131



Toutes les longueurs avec filetage ~ sous tête

Article#	d <sub>1</sub>	d <sub>2</sub>	k	n	t min.	L
1440578	M1,6	3	1	0,4	0,45	2
1440586						3
1440594						4
1440608						5
1440616						6
1440853	M2	3,8	1,3	0,5	0,6	2
1440861						3
1200542						4
1200550						5
1200569						6
1200577						8
1200585						10
1200593						12
1441256	M2,5	4,5	1,6	0,6	0,7	3
1200631						4
1200658						5
1200666						6
1200674						8
1200682						10
1200690						12
1200704						(14)
1200712						16
1200720						(18)
1200739						20
1441205						25

Article#	d <sub>1</sub>	d <sub>2</sub>	k	n	t min.	L
1441272	M3	5,5	2	0,8	0,85	3
1200852						4
1200860						5
1200879						6
1200887						8
1200895						10
1200909						12
1200917						(14)
1200925						16
1200933						(18)
1200941						20
1441248						(22)
1200968						25
1200976						30
1441280						35
1200984						40
1441310						60
1201026	(M3,5)	6	2,4	1	1	8
1201034						10
1201042						12
1201050						(14)
1441396	M4	7	2,6	1,2	1,1	4
1201085						5
1201093						6
1201107						8
1201115						10
1201123						12
1201131						(14)
1201158						16
1201166						(18)
1201174						20
1201182						25
1201190						30
1441418						35
1201204						40
1441434						50
1201212	M5	8,5	3,3	1,2	1,3	6
1201220						8
1201239						10
1201247						12
1201263						16

Article#	d <sub>1</sub>	d <sub>2</sub>	k	n	t min.	L
1201271	M5	8,5	3,3	1,2	1,3	20
1201298						25
1201301						30
1441493						35
1441566	M6	10	3,9	1,6	1,6	8
1201336						10
1201344						12
1201360						16
1201379						20
1201387						25
1201395						30
1441590						35
1201409						40