




DIN 6799

460-580 HV

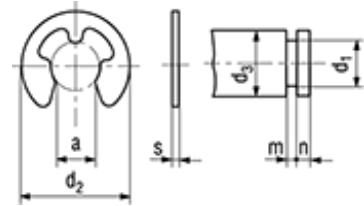

BN 810

Circlips for shafts

bulk

Spring steel 460-580 HV

zinc plated blue

- ~CSN 022929
- ~UNI 7434



Spring elements ≥ 320 HV electroplated coatings:
Susceptible to hydrogen embrittlement! Further notice to
residual risks can be found in the introduction section (I).

Article#	d1 h11	d2 max. fitted	a \pm IT 10 not fitted	s	Tolerance	d3 min.	d3 max.	Leerattribut	m min.	n min.
1284800	1,5	4,25	1,28	0,4	+/-0,02	2	2,5		0,44	0,8
1284819	1,9	4,8	1,61	0,5	+/-0,02	2,5	3		0,54	1
1284827	2,3	6,3	1,94	0,6	+/-0,02	3	4		0,64	1
1284835	3,2	7,3	2,7	0,6	+/-0,02	4	5		0,64	1
1284843	4	9,3	3,34	0,7	+/-0,02	5	7		0,74	1,2
1284851	5	11,3	4,11	0,7	+/-0,02	6	8		0,74	1,2
1284878	6	12,3	5,26	0,7	+/-0,02	7	9		0,74	1,2
1284886	7	14,3	5,84	0,9	+/-0,02	8	11		0,94	1,5
1284894	8	16,3	6,52	1	+/-0,03	9	12		1,05	1,8
1284908	9	18,8	7,63	1,1	+/-0,03	10	14		1,15	2
1284916	10	20,4	8,32	1,2	+/-0,03	11	15		1,25	2
1284924	12	23,4	10,45	1,3	+/-0,03	13	18		1,35	2,5
1284932	15	29,4	12,61	1,5	+/-0,03	16	24		1,55	3
1284940	19	37,6	15,92	1,75	+/-0,03	20	31		1,8	3,5
1284959	24	44,6	21,88	2	+/-0,03	25	38		2,05	4