



ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE

USB A TYPE MALE
PLASTIC: BLACK

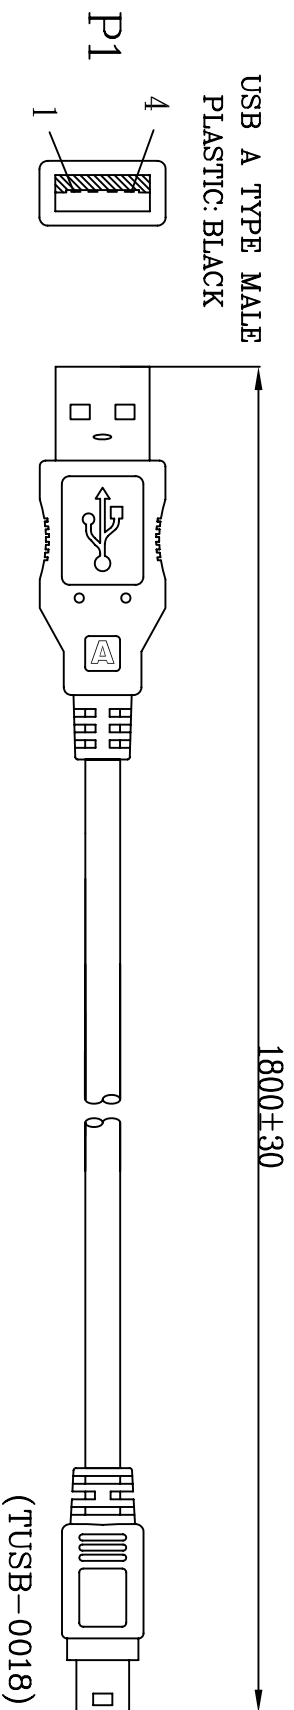

MINI USB 5P/M
PLASTIC: BLACK

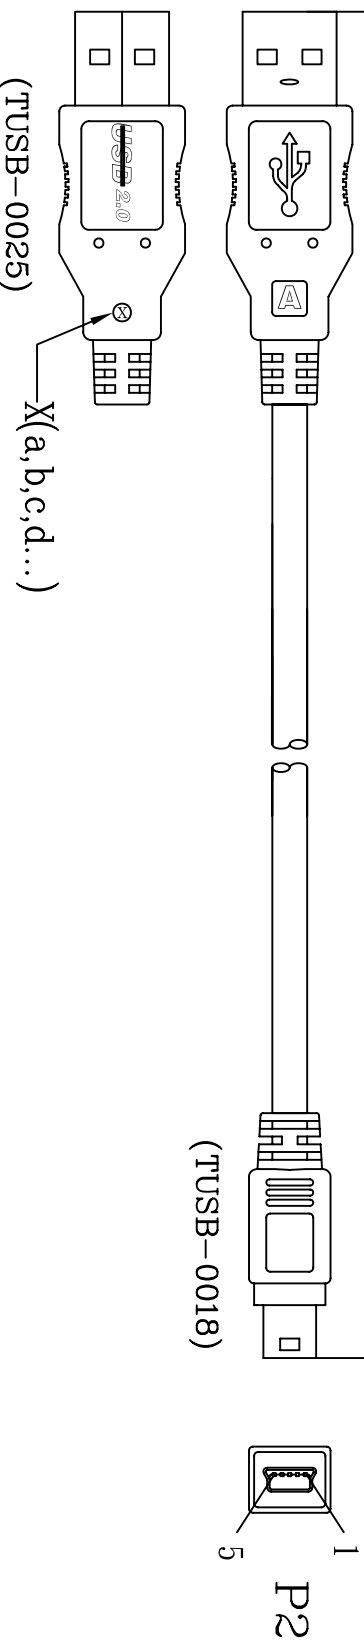

NOTE:

1. CABLE: UL-2725 [28AWG(7/0.127)T.C*1P+28AWG(7/0.127)T.C*2C + AL-FOIL/MYLAR+DRAIN WIRE+BRAID(65% ALUMINUM)]PVC JACKET;
OD: $\phi 3.8 \pm 0.15$ mm COLOR: MATT BLACK (NK-K01), REV 2.0.(C2725525BA)

2. CONNECTOR:


P1: USB A TYPE MALE GOLD FLASH CONTACT,
NICKEL PLATED SHELL.

P2: MINI USB B TYPE 5P MALE GOLD FLASH CONTACT,
NICKEL PLATED SHELL.

3. HOOD: MOULDED TYPE, PVC 45P, COLOR: BLACK(NK-K01)

4. ELECTRICAL TEST:

- <1>.100% OPEN SHORT & MIS WIRE TEST .
 - <2>.CONTACT RESISTANCE 3 Ohms MAX
 - <3>.INSULATION RESISTANCE 10M Ohms MIN.
5. PACKING: <1>EACH PC / POLYBAG + EAN CODE LABEL & ROHS LABEL
<2>EACH CARTON / ROHS LABEL(L*W=35*22mm) + EAN CODE LABEL
<3>EAN CODE: 4260113564158.

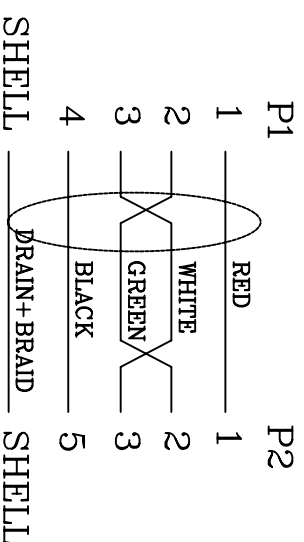

Tolerance	Inch	M/M
X	.015	.30
XX	.010	.10
XXX	.005	.05

Draw
FANNIE 02/26/07

Check	App'd	Customer: CU0014
Engr	Scale NONE	Units m/m
	Dwg No. 170-3045	REV: A

2DIRECT GMBH

Title
USB A(M)-MINI USB 5P(M) REV2. 0 CABLE

App'd
Customer: E-DIR


Scale NONE
Units m/m
Third Angle Projection

Dwg No. 170-3045
REV: A

Sheet 1/2


LTR	REV.	DESCRIPTION	DATE

POLYBAG

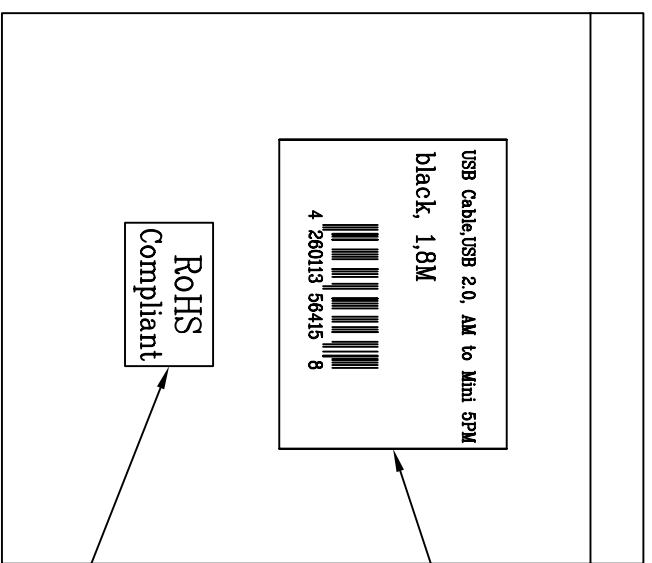

LABEL POSITION

WHITE BASE BLACK WORDS
(L*W= 35*22mm)

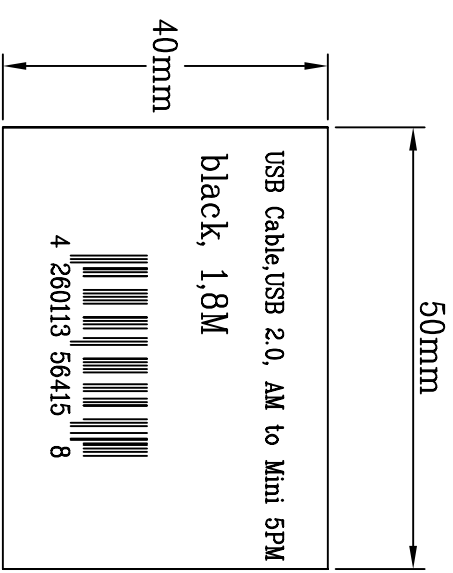

LABEL
(#=CABLE LENGHTH)

Tolerance	Inch	M/M
X	.015	.30
XX	.010	.10
XXX	.005	.05

Draw	FANNIE 02/26/07'		
Customer P/N:	CU0014		
App'd	Customer:	E-DIR	
Scale	NONE	Units	m/m
Dwg No.	170-3045	REV:	A
Engr		Sheet	2/2

2DIRECT GMBH

Title
USB A(M)-MINI USB 5P(M) REV2. 0 CABLE