



Description

- Standard 7 x 5mm crystal oscillator
Ceramic package with a seam sealed metal lid, hermetically sealed
- Model **CFPS-72**
- Model Issue number **12**

Frequency Parameters

- Frequency **8.0MHz**
- Frequency Stability **±50.00ppm**
- Operating Temperature Range **0.00 to 70.00°C**
- Ageing **±3ppm per year max**

Electrical Parameters

- Supply Voltage **5.0V ±10%**
- Current Draw **20.00mA**

Output Details

- Output Compatibility **HCMOS/TTL**
- Drive Capability **50pF max**
- Rise and Fall Time **10ns max**
- Duty Cycle **45/55%**

Output Control

- Standby Operation
Logic '1' (>70% VS) to pad 1 enables oscillator output
Logic '0' (<30% VS) to pad 1 disables oscillator output; the oscillator output goes to the high impedance state
No connection to pad 1 enables oscillator output
Standby Current: 10µA max

Noise Parameters

- Phase Noise (@125.0MHz) typical:
 - 10Hz -54dBC/Hz
 - 100Hz -93dBC/Hz
 - 1KHz -131dBC/Hz
 - 10KHz -150dBC/Hz
 - 100KHz -160dBC/Hz
 - 1MHz -163dBC/Hz
 - 10MHz -164dBC/Hz
- Phase Jitter RMS (@:125.0MHz): 53fs typical

Environmental Parameters

- Shock: MIL-STD-202, Method 213, Condition E
- Vibration: MIL-STD-883, Method 2007, Condition A

Compliance

- RoHS Status (2011/65/EU) **Compliant**
- REACH Status **Compliant**
- MSL Rating (JDEC-STD-033): **Not Applicable**


Packaging Details

- Pack Style: Reel **Tape & reel in accordance with EIA-481-D**
Pack Size: 1,000
- Alternative packing option available


This document is correct at the time of printing; please contact your local office for the latest version.




Outline (mm)




- Pad Connections
- Standby Operation
 - GND
 - Output
 - +VS



Solder Pad Layout



Test Circuit

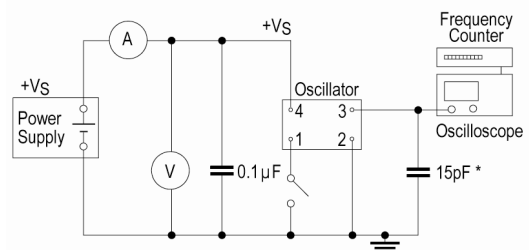

* Inclusive of jigging and equipment capacitance

Sales Office Contact Details:


UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1 408.273.4530


Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com



Wave Form

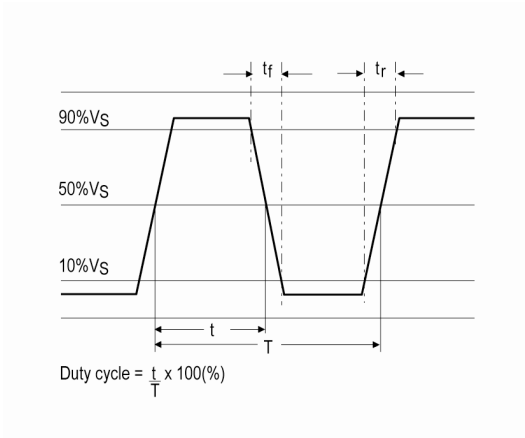

Phase Noise / Jitter

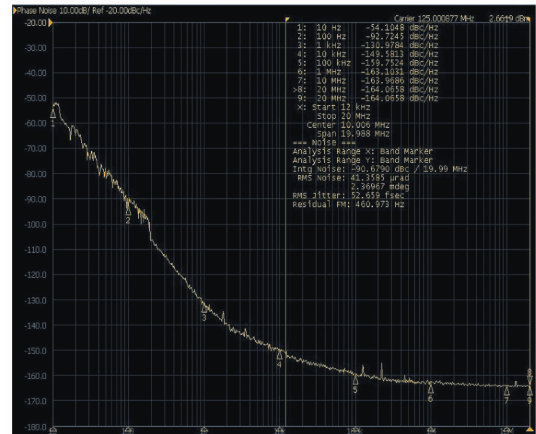

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1 408.273.4530

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com