



Description

- Standard 3.2 x 2.5mm crystal oscillator
Ceramic package with a seam sealed metal lid, hermetically sealed
- Model **CFPS-39**
- Model Issue number **4**

Frequency Parameters

- Frequency **25.0MHz**
- Frequency Stability **±50.00ppm**
- Operating Temperature Range **-40.00 to 85.00°C**
- Ageing **±3ppm max per year @ 25°C**

Electrical Parameters

- Supply Voltage **3.3V ±10%**
- Current Draw **12.00mA**

Output Details

- Output Compatibility **CMOS**
- Drive Capability **15pF max**
- Rise and Fall Time **5ns max**
- Duty Cycle **45/55%%**

Output Control

- Standby Operation:
Logic '1' (>70% VS) to pad 1 enables oscillator output
Logic '0' (<30% VS) to pad 1 disables oscillator output; when disabled the oscillator output goes to the high impedance state
No connection to pad 1 enables oscillator output
Standby Current: 10µA max
Start-Up Time: 10ms max

Environmental Parameters

- Storage Temperature Range: -55 to 125°C
- Shock: MIL-STD-202F, Method 213B: 1000G, 0.5ms, 1/2 sine wave
- Vibration: MIL-STD-202F, Method 204D, Test Condition D: 20G (10Hz-2000Hz), 4hrs in 3 mutually perpendicular planes (total 12hrs)

Compliance

- RoHS Status (2011/65/EU) **Compliant**
- REACH Status **Compliant**
- MSL Rating (JDEC-STD-033): **Not Applicable**




Packaging Details

- Pack Style: Reel **Tape & reel in accordance with EIA-481-D**
Pack Size: 1,000
- Alternative packing option available

This document is correct at the time of printing; please contact your local office for the latest version.



Outline (mm)




Underside View


Pad Connections

- Standby Operation
- GND
- Output
- +Vs

Solder Pad Layout



Test Circuit

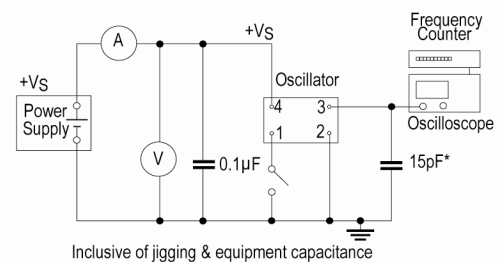

Inclusive of jigging & equipment capacitance

Sales Office Contact Details:


UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1 408.273.4530

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com



Wave Form

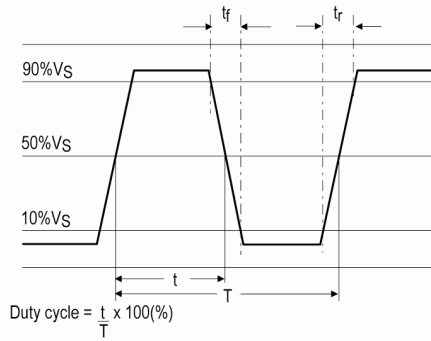

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1 408.273.4530

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com