


U.I. Lapp GmbH	PRODUCT INFORMATION	
	SKINTOP® MS-XL	19.11.2014


Especially for thick walls
Maximum reliability
Wide, variable clamping ranges
Optimum strain relief



Good chemical resistance



Mechanical resistance



Optimum strain relief



Robust



Temperature-resistant



Variety of approval certifications



Application range

With long connection thread for applications involving a thicker wall.

Product Make-up

PG connection thread

Note

Counter nut to be used: SKINDICHT® SM

Refer to SKINTOP® PG accessories for suitable accessories

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Technical Data


Caution:	Refer to Appendix T21 for the installation dimensions and torques
Classification:	ETIM 5.0 Class-ID: EC000441 ETIM 5.0 Class-Description: cable screw gland
Material:	Body: nickel-plated brass Insert: polyamide Sealing ring: CR O-ring: NBR
Protection rating:	IP 68 - 10 bar
Temperature range:	-30°C to +100°C


Product Management	Document: LAPP_PRO159167EN.pdf	1 / 3
--------------------	--------------------------------	-------

**SKINTOP® MS-XL**

19.11.2014

Part number	Article designation / size	Clamping range ØF (mm)	SW (mm)	Overall length/ C (mm)	Thread length/ D (mm)
SKINTOP® MS-XL					
52115700	MS 7 XL	2 - 6,5	14	32.0	12.0
52115710	MS 9 XL	4 - 8	17	35.0	12.0
52115720	MS 11 XL	4 - 10	20	38.0	12.0
52115730	MS 13,5 XL	5 - 12	22	39,5	12.0
52115740	MS 16 XL	8 - 14	24	40,5	12.0
52115750	MS 21 XL	11 - 18	30	45.0	12.0
52115760	MS 29 XL	16 - 25	40	52.0	15.0

U.I. Lapp GmbH	PRODUCT INFORMATION	 LAPP GROUP
SKINTOP® MS-XL		19.11.2014

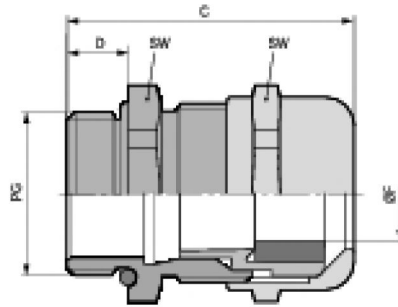

Product Management	Document: LAPP_PRO159167EN.pdf	3 / 3
--------------------	--------------------------------	-------