
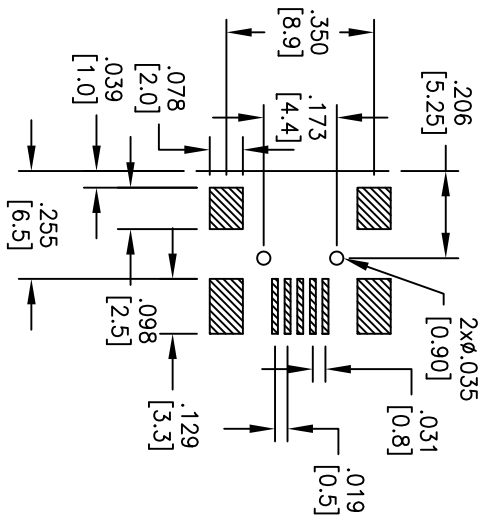
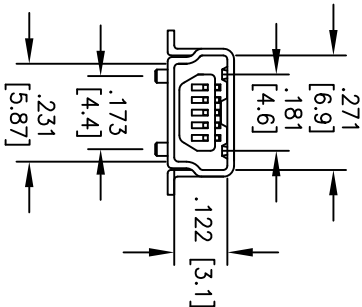


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/3/04	
A		GENERAL REVISION	4/10/06	
B		ADDED LIFE CYCLES & ROHS	6/1/06	

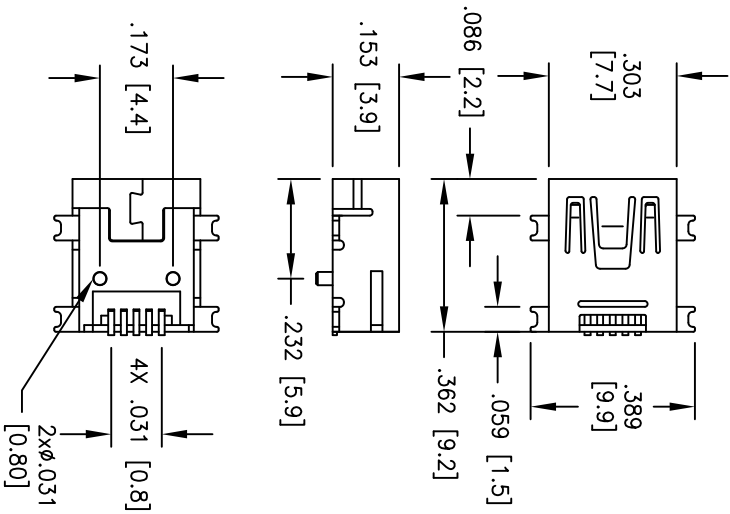

**Specifications:**  
 Material: Hi-Temp Nylon PA6T, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Phosphor Bronze  
 Shell: Steel, Tin plated  
 Plating: Gold Flash over Nickel underplate on contact area, Tin over Copper underplate on SMT tails

**Electrical:**  
 Operating voltage: 30 VAC max.  
 Current rating: 1 Amp max.  
 Contact resistance: 50 mohms max.

**Mechanical:**  
 Insulation resistance: 100 Mohms min. @ 500 VDC  
 Dielectric withstanding voltage: 250 VAC for 1 minute  
 Life Cycles: 1500 cycles min.  
 Temperature Rating: Operating temperature: -55°C to +105°C

**Environmental:**  
 Lead free, RoHS compliant.



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MINI USB, TYPE B, 5 pin, SINGLE PORT  
 RIGHT ANGLE, SMT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		DRAWN: SS		DATE: 10/4/04	
INCHES: .10		CHECKED:		SIZE: X	
HOLES: .015		APPROVED:		PART NO.: MUSB-B5-S-RA-SMT	
APPROVALS:		DATE:		SCALE: NTS	
X.XX ± .10		DATE:		SHEET 1 OF 1	
.XXX ± .015		DATE:		REV. B	
.XXX ± .010		DATE:		REV. B	