


ND.Q

Square end-caps for heavy loads

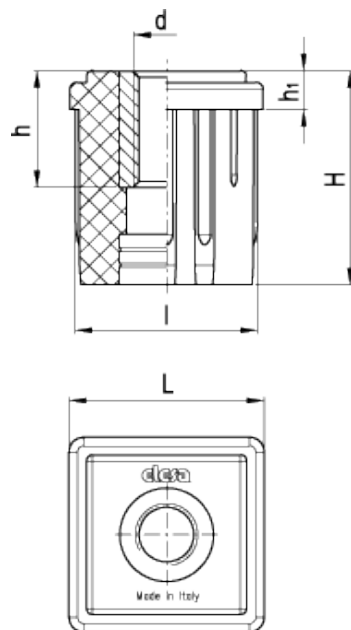

technical informations

Material

Glass-fibre reinforced polyamide based (PA) technopolymer. Resistant to solvents, oils, greases and other chemical agents.

Colour

Black, matte finish.

Bushing

Nickel-plated brass with threaded hole.

| Elesa Standards | | Main dimensions | | | | Mounting hole | | Tube dimensions | | | * Max static load | Weight |
|-----------------|-----------------|-----------------|----|----------------|------|---------------|----|-----------------|-----------|----------|-------------------|--------|
| Code | Description | L | H | h ₁ | l | d | h | External | Thickness | Internal | [N] | g |
| 319102 | ND.Q-30x1.5-M8 | 30 | 33 | 6 | 27.5 | M8 | 15 | 30 | 1.5 | 27 | 17000 | 57 |
| 319103 | ND.Q-30x1.5-M10 | 30 | 33 | 6 | 27.5 | M10 | 15 | 30 | 1.5 | 27 | 17000 | 56 |
| 319104 | ND.Q-30x1.5-M12 | 30 | 33 | 6 | 27.5 | M12 | 18 | 30 | 1.5 | 27 | 17000 | 51 |
| 319106 | ND.Q-30x1.5-M16 | 30 | 33 | 6 | 27.5 | M16 | 20 | 30 | 1.5 | 27 | 17000 | 38 |
| 319262 | ND.Q-40x2-M8 | 40 | 43 | 8 | 36.5 | M8 | 15 | 40 | 2 | 36 | 18000 | 86 |
| 319263 | ND.Q-40x2-M10 | 40 | 43 | 8 | 36.5 | M10 | 15 | 40 | 2 | 36 | 18000 | 85 |
| 319264 | ND.Q-40x2-M12 | 40 | 43 | 8 | 36.5 | M12 | 18 | 40 | 2 | 36 | 18000 | 80 |
| 319266 | ND.Q-40x2-M16 | 40 | 43 | 8 | 36.5 | M16 | 20 | 40 | 2 | 36 | 18000 | 67 |
| 319352 | ND.Q-50x2-M12 | 50 | 55 | 10 | 46.5 | M12 | 18 | 50 | 2 | 46 | 20000 | 157 |
| 319354 | ND.Q-50x2-M16 | 50 | 55 | 10 | 46.5 | M16 | 20 | 50 | 2 | 46 | 20000 | 156 |
| 319356 | ND.Q-50x2-M20 | 50 | 55 | 10 | 46.5 | M20 | 30 | 50 | 2 | 46 | 20000 | 132 |
| 319362 | ND.Q-50x2.5-M12 | 50 | 55 | 10 | 45.5 | M12 | 18 | 50 | 2.5 | 45 | 20000 | 153 |
| 319364 | ND.Q-50x2.5-M16 | 50 | 55 | 10 | 45.5 | M16 | 20 | 50 | 2.5 | 45 | 20000 | 152 |
| 319366 | ND.Q-50x2.5-M20 | 50 | 55 | 10 | 45.5 | M20 | 30 | 50 | 2.5 | 45 | 20000 | 128 |

* The max static load is the value above which the load applied to the element may cause some plastic material breakage, in particular conditions of use. Obviously, a factor that takes into consideration the importance and the safety level of the specific application must be applied to this value.



ELESA and GANTER models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings.

STANDARD MACHINE ELEMENTS WORLDWIDE