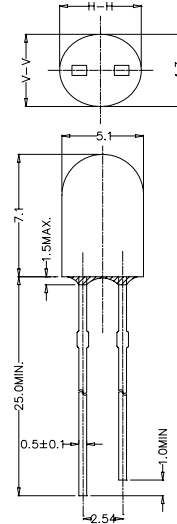


■Features

- Red Diffused Type
- Horizontal oval Directivity
- Superior Weather-resistance
- Without Stopper Type
- RoHS Compliant

■Applications

- Traffic signal lamp
- Automotive Lighting
- Commercial Outdoor Signs
- O/D Sports Commercial

■Outline Dimension


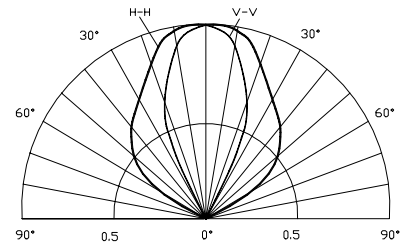
Unit : mm
Tolerance : ±0.25mm

■Absolute Maximum Rating

($T_a=25^\circ\text{C}$)

Item	Symbol	Value	Unit
DC Forward Current	I_F	50	mA
Pulse Forward Current*	I_{FP}	150	mA
Reverse Voltage	V_R	5	V
Power Dissipation	P_D	200	mW
Operating Temperature	T_{opr}	-30 ~ +85	
Storage Temperature	T_{stg}	-30 ~ +100	
Lead Soldering Temperature	T_{sol}	260 /5sec	-

*Pulse width Max.10ms Duty ratio max 1/10

■Directivity

■Electrical -Optical Characteristics

($T_a=25^\circ\text{C}$)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
DC Forward Voltage	V_F	$I_F=20\text{mA}$	1.8	2.0	2.4	V
DC Reverse Current	I_R	$V_R=5\text{V}$	-	-	10	μA
Dom. Wavelength	λ_D	$I_F=20\text{mA}$	620	625	630	nm
Luminous Intensity	I_v	$I_F=20\text{mA}$	750	1120	1560	mcd
50% Power Angle	$2\theta_{1/2}$	$I_F=20\text{mA}$	-	100/40	-	deg

LED & Application Technologies