



| | | | | |
|------|----------------|------------|----------|-------------|
| REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
| B | LEN-880086~089 | 2008/03/06 | Gao Ling | Add Cross |
| | | | | |
| | | | | |

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

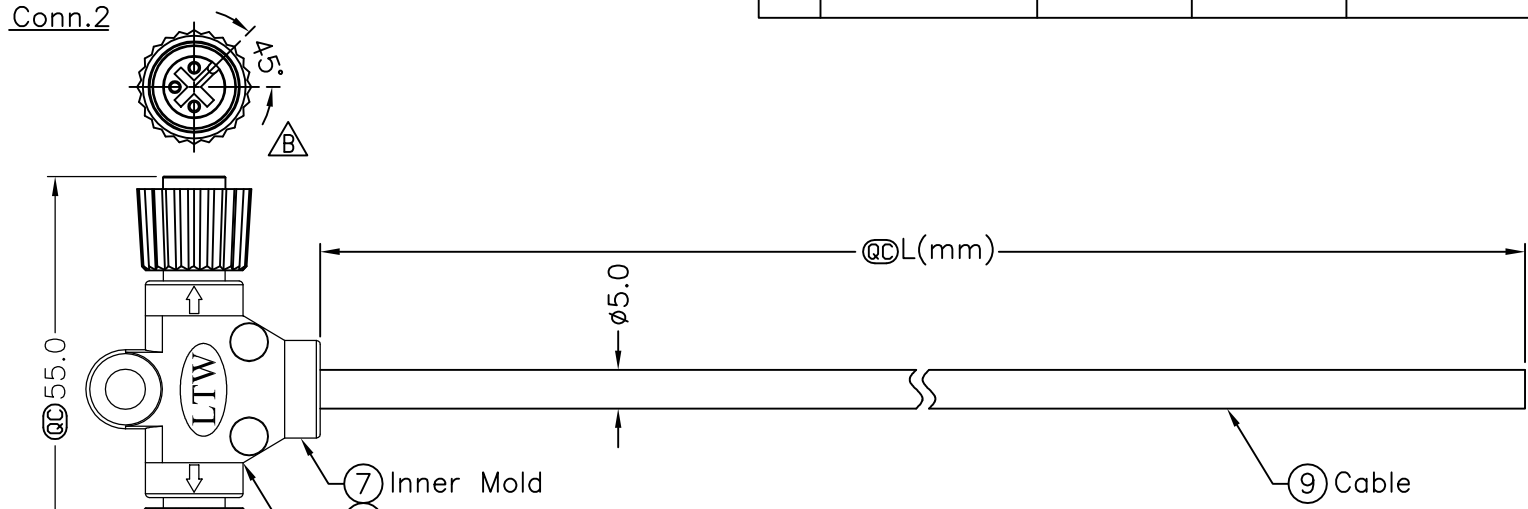

PS-030300-FF0-TSAXX
 ↑
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters



Conn.1&2
Pin Assignments
Front View

| | | | |
|--------|------------|---|--------|
| 3 | Black | 黑 | 3 |
| 2 | Blue | 藍 | 2 |
| 1 | Brown | 棕 | 1 |
| Conn.1 | Wire Color | | Conn.2 |
| | Pin Out | | |

- Note:
- * @C Important Dimension.
 - * Waterproof Rate: IP68
 - * Housing: Black, PU
 - * Male Pin: Copper Alloy, Gold Plated
 - * Wire Harness: UL1007, 24AWG, 3Pcs.
 - * Cable: Black, UL2464 22AWG*3C+Talc PVC Jacket (UV Resistant), OD=5.0mm
 - * Cable Length Tolerance:1M~10M±5%mm,11M~99±500mm.

| | | | | | | | | | | |
|-----------|---------|-------|--|---------------|----------|---------------------|-------------|----------|------|------------|
| UNIT:mm | | TITLE | M12 Conn T Cable Screw FF Conn FF Pin | Amphenol LTW | ITEM NO | PS-030300-FF0-TSAXX | DRAWN BY | Gao Ling | DATE | 2008/03/06 |
| TOLERANCE | ±0.5 mm | SCALE | Free | 安費諾亮泰企業股份有限公司 | DWG NO | PS-030300-FF0-TSAXX | CHECKED BY | Ling | DATE | 2008/03/25 |
| REV. | B | SHEET | 1 OF 1 | | CUSTOMER | ALTW | APPROVED BY | Luke | DATE | 2008/04/29 |
| | | SIZE | A4 | | | | | | | |
| | | @C | :Inspection Item | | | | | | | |