

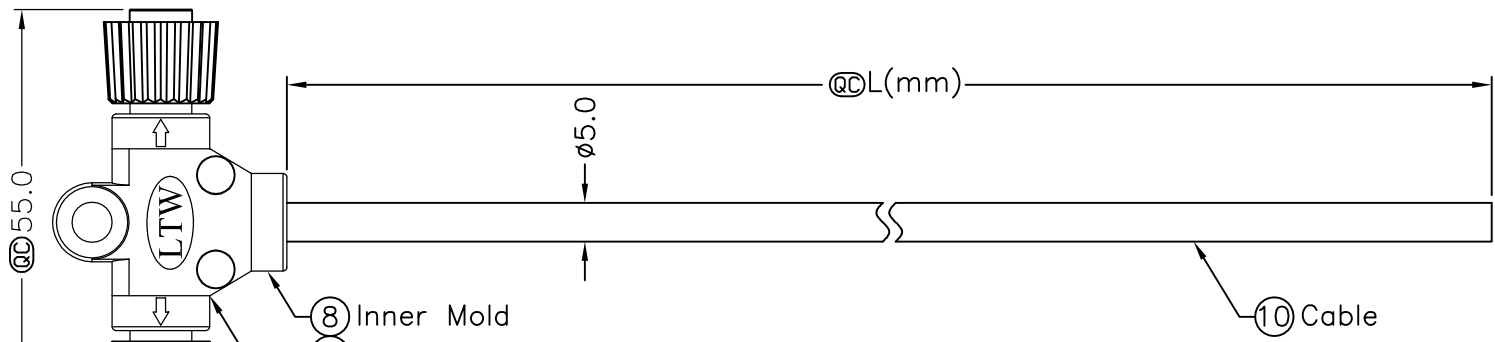




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-880271~274	2008/03/31	Gao Ling	Add Cross


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.



PS-040400-FF0-TSAXX  
 ↑  
 XX:01~99Meter  
 01:01Meter  
 02:02Meters  
 :  
 :  
 99:99Meters  
 Cable Length(L):01~99Meters



Conn.1&2  
Pin Assignments  
Front View



4	Black	黑	4
3	Blue	藍	3
2	White	白	2
1	Brown	棕	1
Conn.1	Wire Color		Conn.2

Pin Out

- Note:
- \* @C Important Dimension.
  - \* Waterproof Rate: IP68
  - \* Housing: Black, PU
  - \* Male Pin: Copper Alloy, Gold Plated
  - \* Wire Harness: UL1007, 24AWG, 4Pcs.
  - \* Cable: Black, UL2464 22AWG\*4C+Talc PVC Jacket (UV Resistant), OD=5.0mm
  - \* Cable Length Tolerance: 1M~10M±5%mm, 11M~99±500mm.

UNIT:mm		TITLE	M12 Conn T Cable Screw FF Conn FF Pin	Amphenol LTW	ITEM NO	PS-040400-FF0-TSAXX	DRAWN BY	Gao Ling	DATE	2008/03/31	
TOLERANCE	±0.5 mm	SCALE	Free	SHEET	1 OF 1	DWG NO	PS-040400-FF0-TSAXX	CHECKED BY	Ling	DATE	2008/03/31
REV.	B	SIZE	A4	@C	:Inspection Item	CUSTOMER	ALTW	APPROVED BY	Luke	DATE	2008/04/29

**Amphenol LTW**  
安費諾亮泰企業股份有限公司