




5	6	7	8
REV. B	ECN NO. LEN-880172~175	DATE 2008/03/11	SIGN Zhang Jin
			DESCRIPTION Add Cross

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

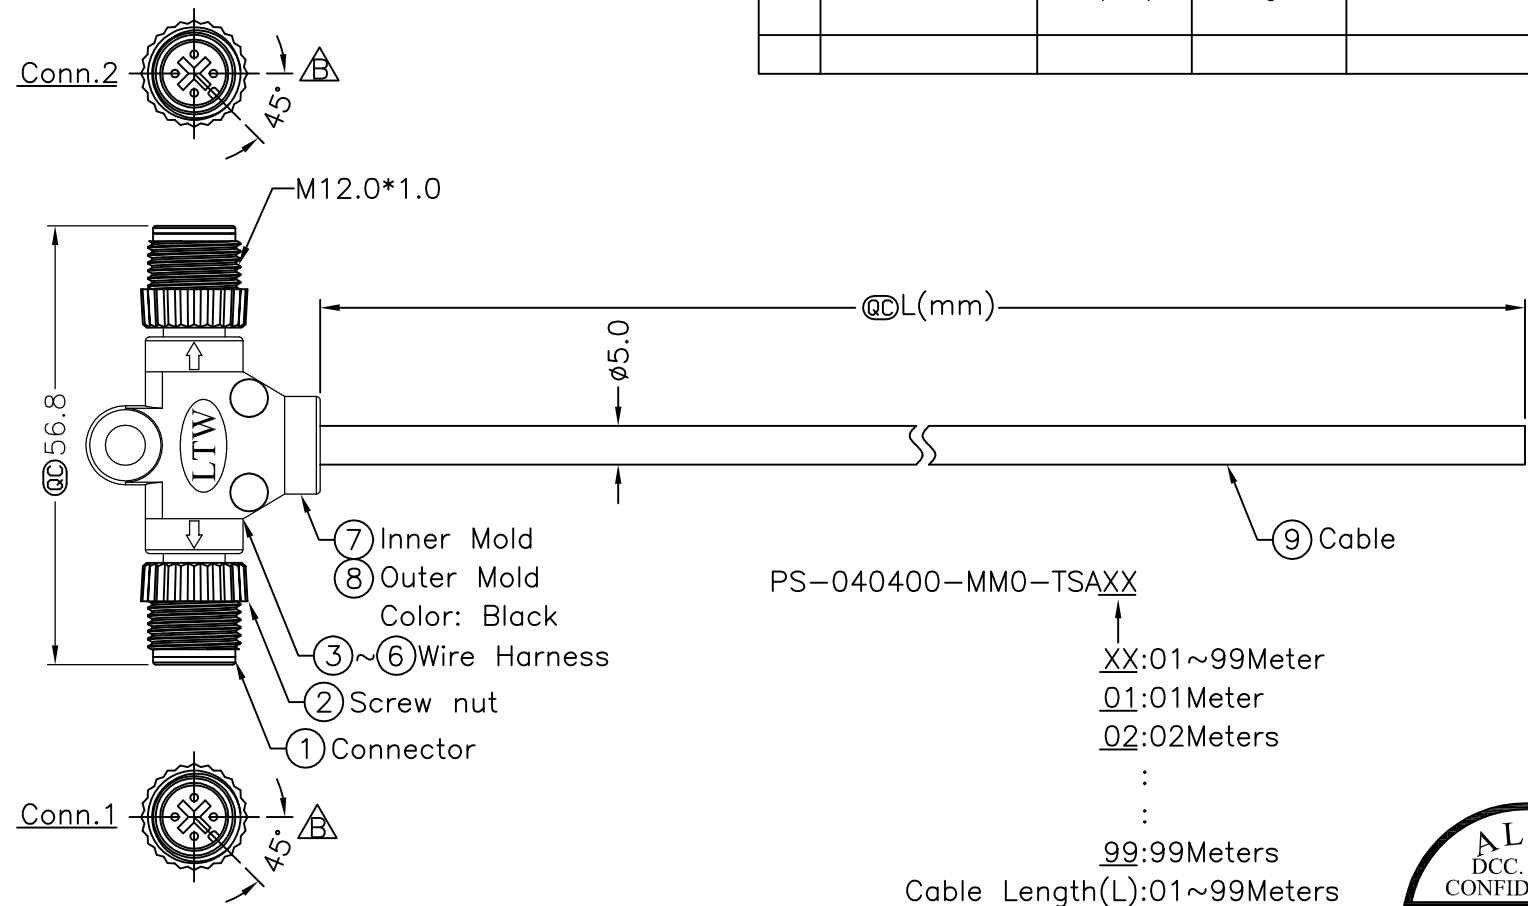


Conn.1&2
Pin Assignments
Front View

4	Black	黑	4
3	Blue	藍	3
2	White	白	2
1	Brown	棕	1
Conn.1	Wire Color		Conn.2

Pin Out

PS-040400-MM0-TSAXX
 ↑
 XX:01~99Meter
 01:01Meter
 02:02Meters
 ⋮
 99:99Meters
 Cable Length(L):01~99Meters

- Note:
- * @C Important Dimension.
 - * Waterproof Rate: IP68
 - * Housing: Black, PU
 - * Male Pin: Copper Alloy, Gold Plated
 - * Wire Harness: UL1007, 24AWG, 4Pcs.
 - * Cable: Black, UL2464 22AWG*4C+Talc PVC Jacket (UV Resistant), OD=5.0mm
 - * Cable Length Tolerance: 1M~10M±5%mm, 11M~99±500mm.



UNIT:mm		TITLE M12 Conn T Cable Screw MM Conn MM Pin	Amphenol LTW		ITEM NO	DRAWN BY Zhang Jin	DATE 2008/03/11
TOLERANCE ±0.5 mm	SCALE Free	SHEET 1 OF 1	安費諾亮泰企業股份有限公司		DWG NO PS-040400-MM0-TSAXX	CHECKED BY Ling	DATE 2008/04/02
REV. B	SIZE A4	@C :Inspection Item			CUSTOMER ALTW	APPROVED BY Luke	DATE 2008/04/29