

DATA SHEET

GENERAL PURPOSE CHIP RESISTORS

RC1218
5%, 1%
RoHS compliant & Halogen Free



SCOPE

This specification describes RC1218 series chip resistors with lead-free terminations made by thick film process.

APPLICATIONS

- All general purpose application

FEATURES

- Halogen Free Epoxy
- RoHS compliant
 - Products with lead free terminations meet RoHS requirements
 - Pb-glass contained in electrodes, resistor element and glass are exempted by RoHS
- Reducing environmentally hazardous wastes
- High component and equipment reliability
- Saving of PCB space
- None forbidden-materials used in products/production

ORDERING INFORMATION - GLOBAL PART NUMBER & I2NC

Both part numbers are identified by the series, size, tolerance, packing type, temperature coefficient, taping reel and resistance value.

YAGEO BRAND ordering code

GLOBAL PART NUMBER (PREFERRED)

RC1218 X K - XX XXXX L
(1) (2) (3) (4) (5) (6)

(1) TOLERANCE

F = ±1%
 J = ±5% (for Jumper ordering, use code of J)

(2) PACKAGING TYPE

K = Embossed taping reel

(3) TEMPERATURE COEFFICIENT OF RESISTANCE

- = Base on spec

(4) TAPING REEL

07 = 7 inch dia. Reel

(5) RESISTANCE VALUE

There are 2~4 digits indicated the resistor value. Letter R/K/M is decimal point, no need to mention the last zero after R/K/M, e.g.1K2, not 1K20.
 Detailed resistance rules show in table of "Resistance rule of global part number".

(6) DEFAULT CODE

Letter L is system default code for order only (Note)

| Resistance rule of global part number | |
|---------------------------------------|--|
| Resistance code rule | Example |
| OR | OR = Jumper |
| XRXX (1 to 9.76 Ω) | 1R = 1 Ω 1R5 = 1.5 Ω 9R76 = 9.76 Ω |
| XXRX (10 to 97.6 Ω) | 10R = 10 Ω 97R6 = 97.6 Ω |
| XXXR (100 to 976 Ω) | 100R = 100 Ω |
| XKXX (1 to 9.76 KΩ) | 1K = 1,000 Ω 9K76 = 9760 Ω |
| XMXX (1 to 9.76 MΩ) | 1M = 1,000,000 Ω 9M76 = 9,760,000 Ω |

ORDERING EXAMPLE

The ordering code of a RC1218 chip resistor, value 56 Ω with ±1% tolerance, supplied in 7-inch tape reel is: RC1218FK-0756RL.

NOTE

1. All our RSMD products meet RoHS compliant and Halogen Free. "LFP" of the internal 2D reel label mentions "Lead Free Process"
2. On customized label, "LFP" or specific symbol can be printed

PHYCOMP BRAND ordering codes

Both GLOBAL PART NUMBER (preferred) and I2NC (traditional) codes are acceptable to order Phycomp brand products.

GLOBAL PART NUMBER (PREFERRED)

For detailed information of GLOBAL PART NUMBER and ordering example, please refer to page 2.

I2NC CODE

| 2322 | | XXX XXXXX L | | | EMBOSSED TAPE ON REEL (units) ⁽²⁾ |
|------------|-------------------------|-------------|------------------|-----------|--|
| (1) | | (2) | (3) | (4) | |
| TYPE/ I218 | START IN ⁽¹⁾ | TOL. (%) | RESISTANCE RANGE | | |
| PRC20I | 2322 | ±5% | 1 to 1 MΩ | 735 64xxx | |
| PRC20I | 2322 | ±1% | 1 to 1 MΩ | 735 7xxxx | |
| Jumper | 2322 | - | 0 Ω | 735 90007 | |

| Resistance decade ⁽³⁾ | Last digit |
|----------------------------------|------------|
| 0.01 to 0.0976 Ω | 0 |
| 0.1 to 0.976 Ω | 7 |
| 1 to 9.76 Ω | 8 |
| 10 to 97.6 Ω | 9 |
| 100 to 976 Ω | 1 |
| 1 to 9.76 KΩ | 2 |
| 10 to 97.6 KΩ | 3 |
| 100 to 976 KΩ | 4 |
| 1 to 9.76 MΩ | 5 |
| 10 to 97.6 MΩ | 6 |

- (1) The resistors have a 12-digit ordering code starting with 2322.
- (2) The subsequent 4 or 5 digits indicate the resistor tolerance and packaging.
- (3) The remaining 4 or 3 digits represent the resistance value with the last digit indicating the multiplier as shown in the table of "Last digit of I2NC".
- (4) Letter L is system default code for order only ^(Note)

ORDERING EXAMPLE

The ordering code of a PRC20I resistor, value 56 Ω with ±1% tolerance, supplied in tape of 4,000 units per reel is: 232273575609L or RC1218FK-0756RL.

Example:


| | | |
|--------|---|-------------|
| 0.02 Ω | = | 0200 or 200 |
| 0.3 Ω | = | 3007 or 307 |
| 1 Ω | = | 1008 or 108 |
| 33 KΩ | = | 3303 or 333 |
| 10 MΩ | = | 1006 or 106 |

NOTE

- 1. All our RSMD products meet RoHS compliant and Halogen Free. "LFP" of the internal 2D reel label mentions "Lead Free Process"
- 2. On customized label, "LFP" or specific symbol can be printed


MARKING

RC1218



E-24 series: 3 digits
First two digits for significant figure and 3rd digit for number of zeros

Fig. 1 Value=100 Ω



Both E-24 and E-96 series: 4 digits
First three digits for significant figure and 4th digit for number of zeros

Fig. 2 Value=10 KΩ

For further marking information, please see special data sheet “Chip resistors marking”.

CONSTRUCTION

The resistor is constructed on top of a high-grade ceramic body. Internal metal electrodes are added on each end to make the contacts to the thick film resistive element. The composition of the resistive element is a noble metal imbedded into a glass and covered by a second glass to prevent environment influences. The resistor is laser trimmed to the rated resistance value. The resistor is covered with a protective epoxy coat, finally the two external terminations (matte tin on Ni-barrier) are added. See fig.3

OUTLINES

For dimension see Table I

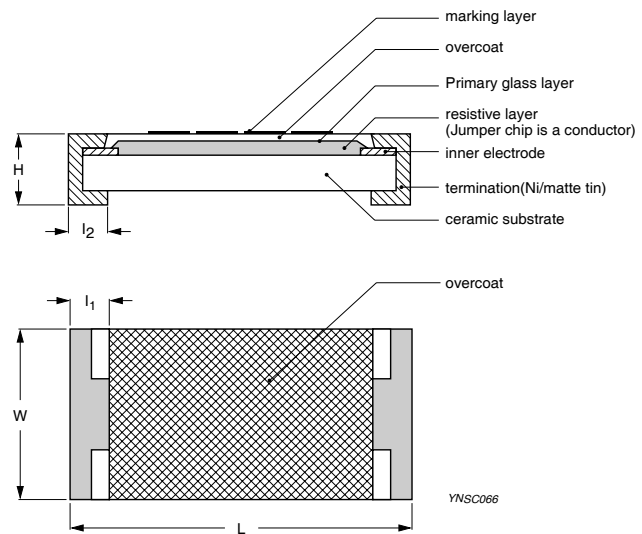


Fig. 3 Chip resistor outlines

DIMENSIONS

| Table I | |
|---------------------|-------------|
| TYPE | RC1218 |
| L (mm) | 3.10 ± 0.10 |
| W (mm) | 4.60 ± 0.10 |
| H (mm) | 0.55 ± 0.10 |
| l ₁ (mm) | 0.45 ± 0.20 |
| l ₂ (mm) | 0.40 ± 0.20 |

ELECTRICAL CHARACTERISTICS

Table 2

| CHARACTERISTICS | RC1218 1W | |
|---------------------------------|--------------------------|-------------|
| Operating Temperature Range | -55 °C to +155 °C | |
| Maximum Working Voltage | 200 V | |
| Maximum Overload Voltage | 500 V | |
| Dielectric Withstanding Voltage | 500 V | |
| Resistance Range | 5% (E24) | 1 Ω to 1 MΩ |
| | 1% (E24/E96) | 1 Ω to 1 MΩ |
| | Zero Ohm Jumper < 0.02 Ω | |
| Temperature Coefficient | 1 Ω ≤ R ≤ 10 Ω | ±200 ppm/°C |
| | 10 Ω < R ≤ 1 MΩ | ±100 ppm/°C |
| Jumper Criteria | Rated Current | 6 A |
| | Maximum Current | 10 A |

FOOTPRINT AND SOLDERING PROFILES

For recommended footprint and soldering profiles, please see the special data sheet “Chip resistors mounting”.

PACKING STYLE AND PACKAGING QUANTITY

Table 3 Packing style and packaging quantity

| PRODUCT TYPE | PACKING STYLE | REEL DIMENSION | QUANTITY PER REEL |
|--------------|--------------------------|----------------|-------------------|
| RC1218 | Embossed taping reel (K) | 7" (178 mm) | 4,000 units |

NOTE

I. For embossed tape and reel specification/dimensions, please see the special data sheet “Chip resistors packing”

FUNCTIONAL DESCRIPTION

POWER RATING

RC1218 rated power at 70°C is 1 W

RATED VOLTAGE

The DC or AC (rms) continuous working voltage corresponding to the rated power is determined by the following formula:

$$V = \sqrt{P \times R}$$

or max. working voltage whichever is less

Where

$$V = \text{Continuous rated DC or AC (rms) working voltage (V)}$$

$$P = \text{Rated power (W)}$$

$$R = \text{Resistance value (Ω)}$$

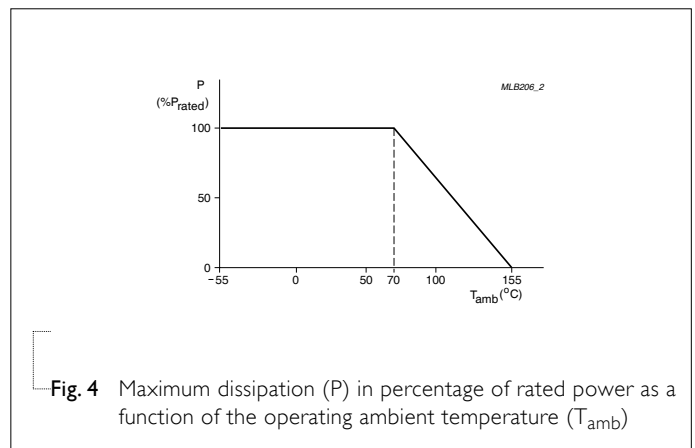


Fig. 4 Maximum dissipation (P) in percentage of rated power as a function of the operating ambient temperature (T_{amb})

TESTS AND REQUIREMENTS
Table 4 Test condition, procedure and requirements

| TEST | TEST METHOD | PROCEDURE | REQUIREMENTS |
|---|--------------------------|--|--|
| Temperature Coefficient of Resistance (T.C.R.) | IEC 60115-1 4.8 | At +25/-55 °C and +25/+125 °C Formula: $T.C.R = \frac{R_2 - R_1}{R_1(t_2 - t_1)} \times 10^6 \text{ (ppm/°C)}$ Where t ₁ =+25 °C or specified room temperature t ₂ =-55 °C or +125 °C test temperature R ₁ =resistance at reference temperature in ohms R ₂ =resistance at test temperature in ohms | Refer to table 2 |
| Life/Endurance | IEC 60115-1 4.25.1 | At 70±5 °C for 1,000 hours, RCWV applied for 1.5 hours on, 0.5 hour off, still air required | ±(1.0%+0.05 Ω) for 1% tol. ±(3.0%+0.05 Ω) for 5% tol. <100 mΩ for Jumper |
| High Temperature Exposure/Endurance at Upper Category Temperature | IEC 60068-2-2 | 1,000 hours at 155±5 °C, unpowered | ±(1.0%+0.05 Ω) for 1% tol. ±(2.0%+0.05 Ω) for 5% tol. <50 mΩ for Jumper |
| Moisture Resistance | MIL-STD-202G Method-106G | Each temperature / humidity cycle is defined at 8 hours, 3 cycles / 24 hours for 10d. with 25 °C / 65 °C 95% R.H, without steps 7a & 7b, unpowered Parts mounted on test-boards, without condensation on parts Measurement at 24±2 hours after test conclusion | ±(0.5%+0.05 Ω) for 1% tol. ±(2.0%+0.05 Ω) for 5% tol. <100 mΩ for Jumper |
| Thermal Shock | MIL-STD-202G Method-107G | -55/+125 °C Number of cycles required is 300. Devices unmounted Maximum transfer time is 20 seconds. Dwell time is 15 minutes. Air – Air | ±(0.5%+0.05 Ω) for 1% tol. ±(1%+0.05 Ω) for 5% tol. <50 mΩ for Jumper |
| Short Time Overload | IEC60115-1 4.13 | 2.5 times of rated voltage or maximum overload voltage whichever is less for 5 sec at room temperature | ±(1.0%+0.05 Ω) for 1% tol. ±(2.0%+0.05 Ω) for 5% tol. <50 mΩ for Jumper No visible damage |

| TEST | TEST METHOD | PROCEDURE | REQUIREMENTS | | | | | | | | | | | | | | |
|------------------------------------|----------------------|---|---|-----------------|-------|-----------|-------|------------------|-------|------------------|-------|--------------------|-------|-------------------|-------|------------------|-------|
| Board Flex/ Bending | IEC 60068-2-21 | Chips mounted on a 90mm glass epoxy resin PCB (FR4) 2 mm bending Bending time: 60±5 seconds | ±(1.0%+0.05 Ω) for 1%, 5% tol. <50 mΩ for Jumper No visible damage | | | | | | | | | | | | | | |
| Low Temperature Operation | IEC 60068-2-1 | The resistor shall be subjected to a DC rated voltage for 1.5 h-on, 0.5 h-off, at -55±3 °C This constitutes shall be repeated for 96 hours However the applied voltage shall not exceed the maximum operating voltage | ±(0.5%+0.05 Ω) for 1% tol. ±(1.0%+0.05 Ω) for 5% tol. No visible damage | | | | | | | | | | | | | | |
| Insulation Resistance | IEC 60115-1 4.6 | Rated continuous overload voltage (RCOV) for 1 minute Type RC1218 Voltage (DC) 100 V | ≥10 GΩ | | | | | | | | | | | | | | |
| Dielectric Withstand Voltage | IEC 60115-1 4.7 | Maximum voltage (V _{rms}) applied for 1 minute Type RC1218 Voltage (AC) 500 V _{rms} | No breakdown or flashover | | | | | | | | | | | | | | |
| Resistance to Solvent | IPC/JEDEC J-STD-020D | Isopropylalcohol (C ₃ H ₇ OH) followed by brushing | No smeared | | | | | | | | | | | | | | |
| Noise | IEC 60115-1 4.12 | Maximum voltage (V _{rms}) applied | <table border="1"> <thead> <tr> <th>Resistors range</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>R < 100 Ω</td> <td>10 dB</td> </tr> <tr> <td>100 Ω ≤ R < 1 KΩ</td> <td>20 dB</td> </tr> <tr> <td>1 KΩ ≤ R < 10 KΩ</td> <td>30 dB</td> </tr> <tr> <td>10 KΩ ≤ R < 100 KΩ</td> <td>40 dB</td> </tr> <tr> <td>100 KΩ ≤ R < 1 MΩ</td> <td>46 dB</td> </tr> <tr> <td>1 MΩ ≤ R ≤ 22 MΩ</td> <td>48 dB</td> </tr> </tbody> </table> | Resistors range | Value | R < 100 Ω | 10 dB | 100 Ω ≤ R < 1 KΩ | 20 dB | 1 KΩ ≤ R < 10 KΩ | 30 dB | 10 KΩ ≤ R < 100 KΩ | 40 dB | 100 KΩ ≤ R < 1 MΩ | 46 dB | 1 MΩ ≤ R ≤ 22 MΩ | 48 dB |
| Resistors range | Value | | | | | | | | | | | | | | | | |
| R < 100 Ω | 10 dB | | | | | | | | | | | | | | | | |
| 100 Ω ≤ R < 1 KΩ | 20 dB | | | | | | | | | | | | | | | | |
| 1 KΩ ≤ R < 10 KΩ | 30 dB | | | | | | | | | | | | | | | | |
| 10 KΩ ≤ R < 100 KΩ | 40 dB | | | | | | | | | | | | | | | | |
| 100 KΩ ≤ R < 1 MΩ | 46 dB | | | | | | | | | | | | | | | | |
| 1 MΩ ≤ R ≤ 22 MΩ | 48 dB | | | | | | | | | | | | | | | | |
| Humidity (steady state) | IEC 60115-1 4.37 | Steady state for 1000 hours at 40 °C / 95% R.H. RCWV applied for 1.5 hours on and 0.5 hour off | ±(1.0%+0.05 Ω) for 1% tol. ±(2.0%+0.05 Ω) for 5% tol. <100 mΩ for Jumper | | | | | | | | | | | | | | |

| TEST | TEST METHOD | PROCEDURE | REQUIREMENTS |
|--------------------------------|-----------------------------|---|--|
| Intermittent Overload | IEC 60115-1 4.39 | 2.5 times of rated voltage or maximum overload voltage whichever is less for 1 second on and 25 seconds off; total 10,000 cycles | $\pm(1.0\%+0.05 \Omega)$ for 1% tol. $\pm(2.0\%+0.05 \Omega)$ for 5% tol. <100 m Ω for Jumper |
| Solderability - Wetting | IPC/JEDEC J-STD-002B test B | Electrical Test not required Magnification 50X SMD conditions: 1 st step: method B, aging 4 hours at 155 °C dry heat 2 nd step: leadfree solder bath at 245±3 °C Dipping time: 3±0.5 seconds | Well tinned (≥95% covered) No visible damage |
| - Leaching | IPC/JEDEC J-STD-002B test D | Leadfree solder, 260 °C, 30 seconds immersion time | No visible damage |
| - Resistance to Soldering Heat | IEC 60068-2-58 | Condition B, no pre-heat of samples Leadfree solder, 260 °C, 10 seconds immersion time Procedure 2 for SMD: devices fluxed and cleaned with isopropanol | $\pm(0.5\%+0.05 \Omega)$ for 1% tol. $\pm(1.0\%+0.05 \Omega)$ for 5% tol. <50 m Ω for Jumper No visible damage |

REVISION HISTORY

| REVISION | DATE | CHANGE NOTIFICATION | DESCRIPTION |
|-----------|--------------|---------------------|--|
| Version 3 | Mar 15, 2010 | - | <ul style="list-style-type: none"> - Test items and methods updated - Test requirements upgraded - The statement of "Halogen Free" on the cover added |
| Version 2 | Jul 15, 2008 | - | <ul style="list-style-type: none"> - Change to dual brand datasheet that describe RC1218 with RoHS compliant - Description of "Halogen Free Epoxy" added - Define global part number |
| Version 1 | Oct 13, 2004 | - | <ul style="list-style-type: none"> - New datasheet for 1218 thick film 1% and 5% with lead-free terminations - Replace the 1218 part of pdf files: PRC201_51_17 - Test method and procedure updated - Taping reel changed from 11" to 7" and quantity per reel from 5K to 4K as well |

“ Yageo reserves all the rights for revising the content of this datasheet without further notification, as long as the products itself are unchanged. Any product change will be announced by PCN.”