




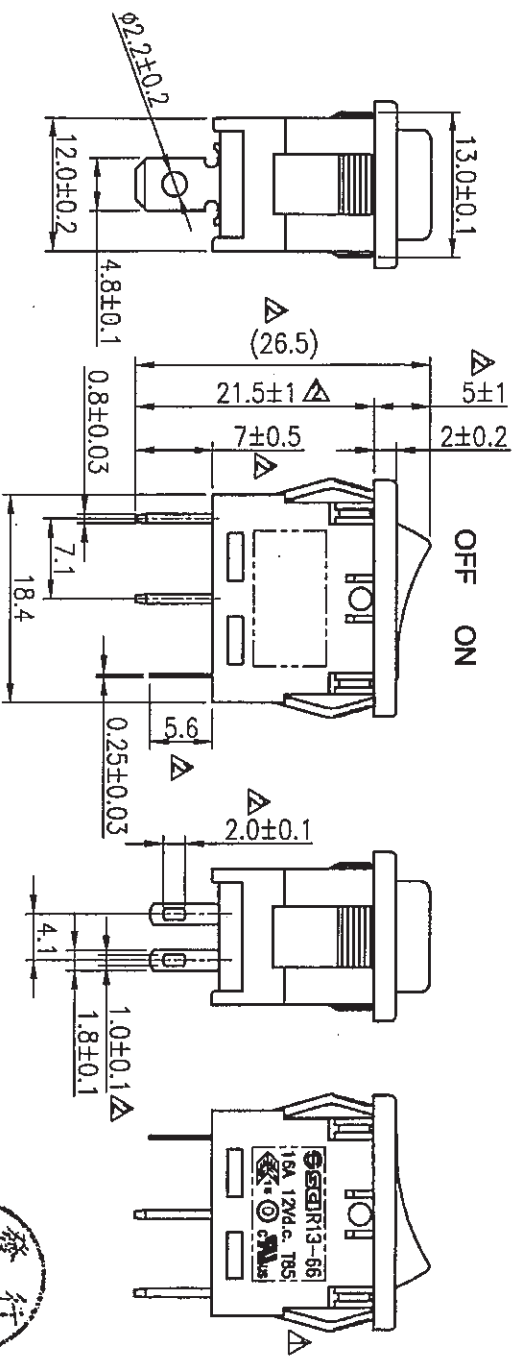




Rating	16A 12V DC		Mounting Hole													
Contact Resistance	50m ohm Max.															
Insulation Resistance	DC 500V 100M ohm Min.		LED Rating	Green:@20mA, If=2.2VDC												
Dielectric Strength	AC 1500V 1 minute		Thickness	<table border="1"> <tr> <td></td> <td>X</td> <td>Y</td> </tr> <tr> <td>0.75..1.25</td> <td>19.2-0.1</td> <td>13+0.1</td> </tr> <tr> <td>1.25..2</td> <td>19.4-0.1</td> <td>13+0.1</td> </tr> <tr> <td>2...3</td> <td>19.8-0.1</td> <td>13+0.1</td> </tr> </table>		X	Y	0.75..1.25	19.2-0.1	13+0.1	1.25..2	19.4-0.1	13+0.1	2...3	19.8-0.1	13+0.1
	X	Y														
0.75..1.25	19.2-0.1	13+0.1														
1.25..2	19.4-0.1	13+0.1														
2...3	19.8-0.1	13+0.1														
Operation Temperature	-20°C~85°C															
Switch Function	4P SPST ON-OFF (LED Independent)															



Material:  
 Frame: Black, Nylon 66  
 Actuator: Black, Nylon 66  
 Lens: Green, PC  
 Lamp: LED(Green)



Tolerances Unless Otherwise Specified ±0.3

02/22/13	柳新強	1.0=>1.0±0.1,2.0=>2.0±0.1,刪除尺寸20.1±0.5,增加尺寸5.6.					
09/25/12	張栗	修正尺寸:19.7±1=>21.5±1,5.2±1=>5±1,7.2±0.5=>7±0.5,(24.9)=>(26.5),更新本體刻字					
Date	Name	Description		No.			
Drawn	Checked	Approved	SCI BOM No.	1821411	Model Name	ROCKER SWITCH	
柳新強			Customer No.		Model No.	R13-66L-02	Rev.
02/22/13	2/22-13	2/23-13	Unit	mm	Shin Chin Industrial Co., Ltd.		2