


Sep.1.2015 Copyright 2015 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

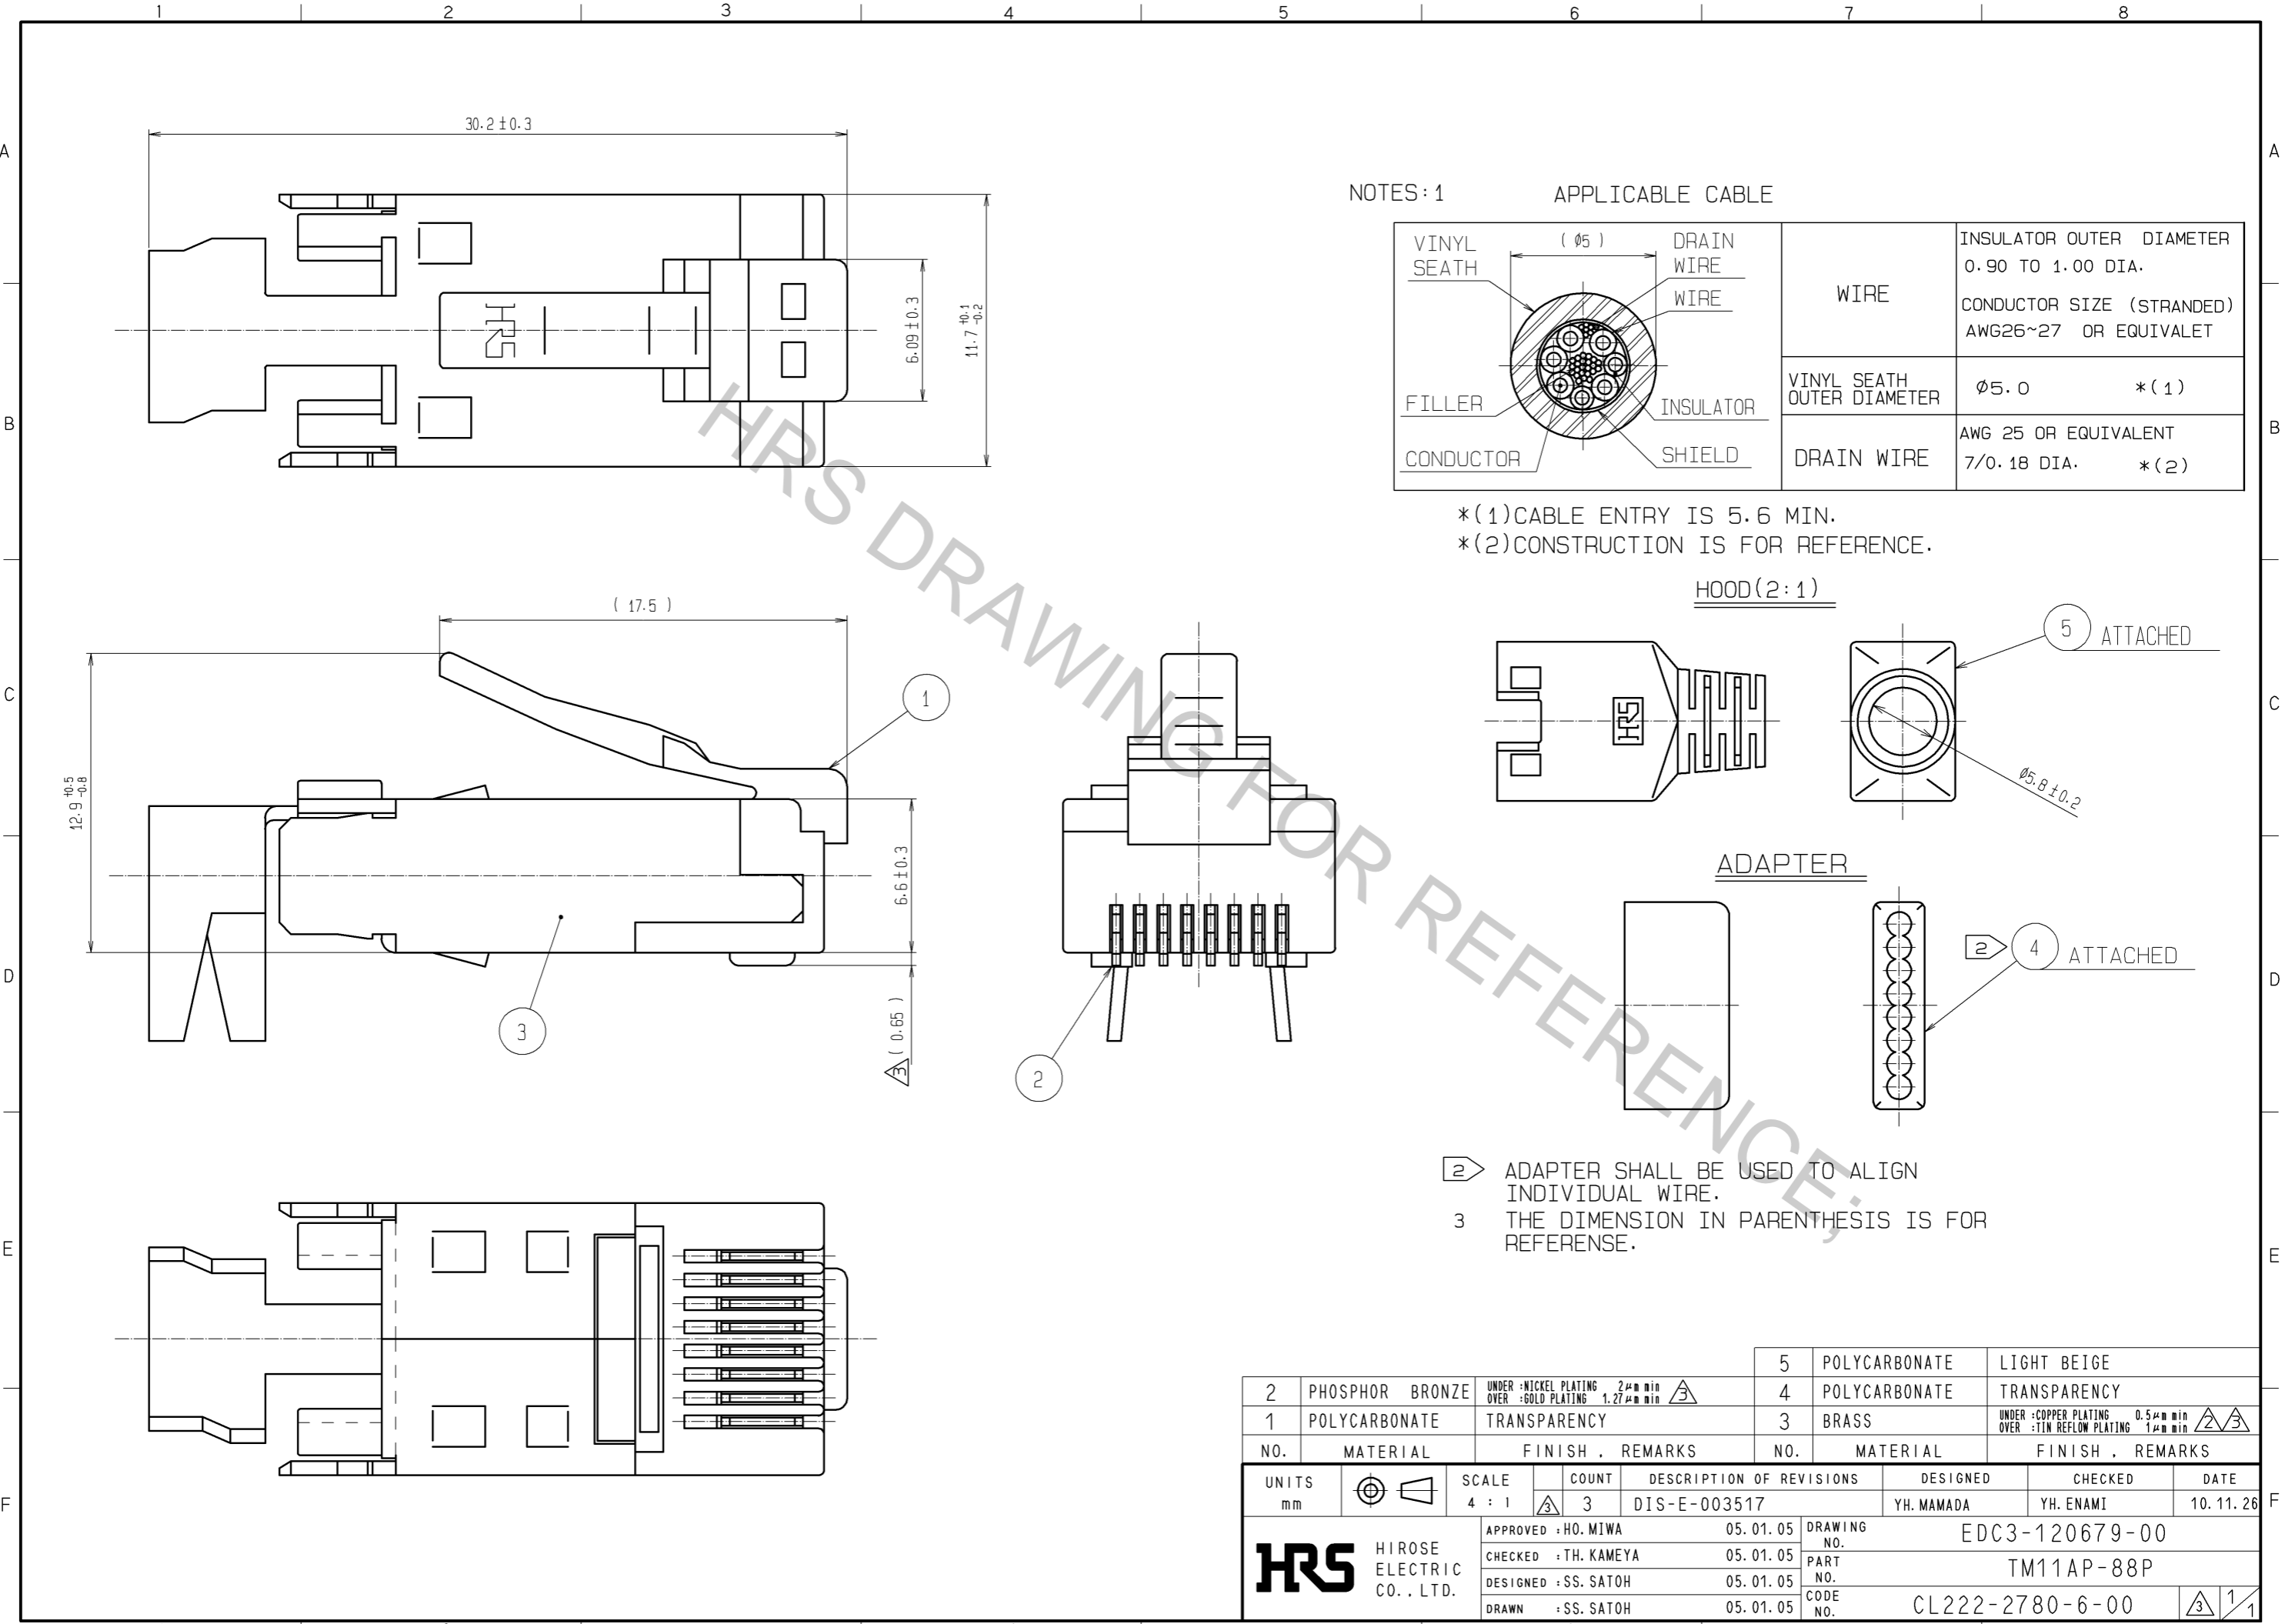

NOTES: 1 APPLICABLE CABLE

VINYL SEATH	($\phi 5$)	DRAIN WIRE	WIRE	INSULATOR OUTER DIAMETER	0.90 TO 1.00 DIA.
FILLER		WIRE		CONDUCTOR SIZE (STRANDED)	AWG26~27 OR EQUIVALET
CONDUCTOR		INSULATOR	VINYL SEATH OUTER DIAMETER	$\phi 5.0$	*(1)
		SHIELD	DRAIN WIRE	AWG 25 OR EQUIVALENT	7/0.18 DIA. *(2)

*(1)CABLE ENTRY IS 5.6 MIN.
*(2)CONSTRUCTION IS FOR REFERENCE.

② ADAPTER SHALL BE USED TO ALIGN INDIVIDUAL WIRE.
3 THE DIMENSION IN PARENTHESIS IS FOR REFERENCE.

2	PHOSPHOR BRONZE	UNDER :NICKEL PLATING 2 μ m min OVER :GOLD PLATING 1.27 μ m min	5	POLYCARBONATE	LIGHT BEIGE		
1	POLYCARBONATE	TRANSPARENCY	4	POLYCARBONATE	TRANSPARENCY		
			3	BRASS	UNDER :COPPER PLATING 0.5 μ m min OVER :TIN REFLOW PLATING 1 μ m min		
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm		4 : 1	3	DIS-E-003517	YH.MAMADA	YH.ENAMI	10.11.26
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HO.MIWA	05.01.05	DRAWING NO.	EDC3-120679-00		
		CHECKED : TH.KAMEYA	05.01.05	PART NO.	TM11AP-88P		
		DESIGNED : SS.SATO	05.01.05	CODE NO.	CL222-2780-6-00		
		DRAWN : SS.SATO	05.01.05		③ 1/1		