


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/16/13	

APPROVED: _____
 DATE: _____ TITLE: _____

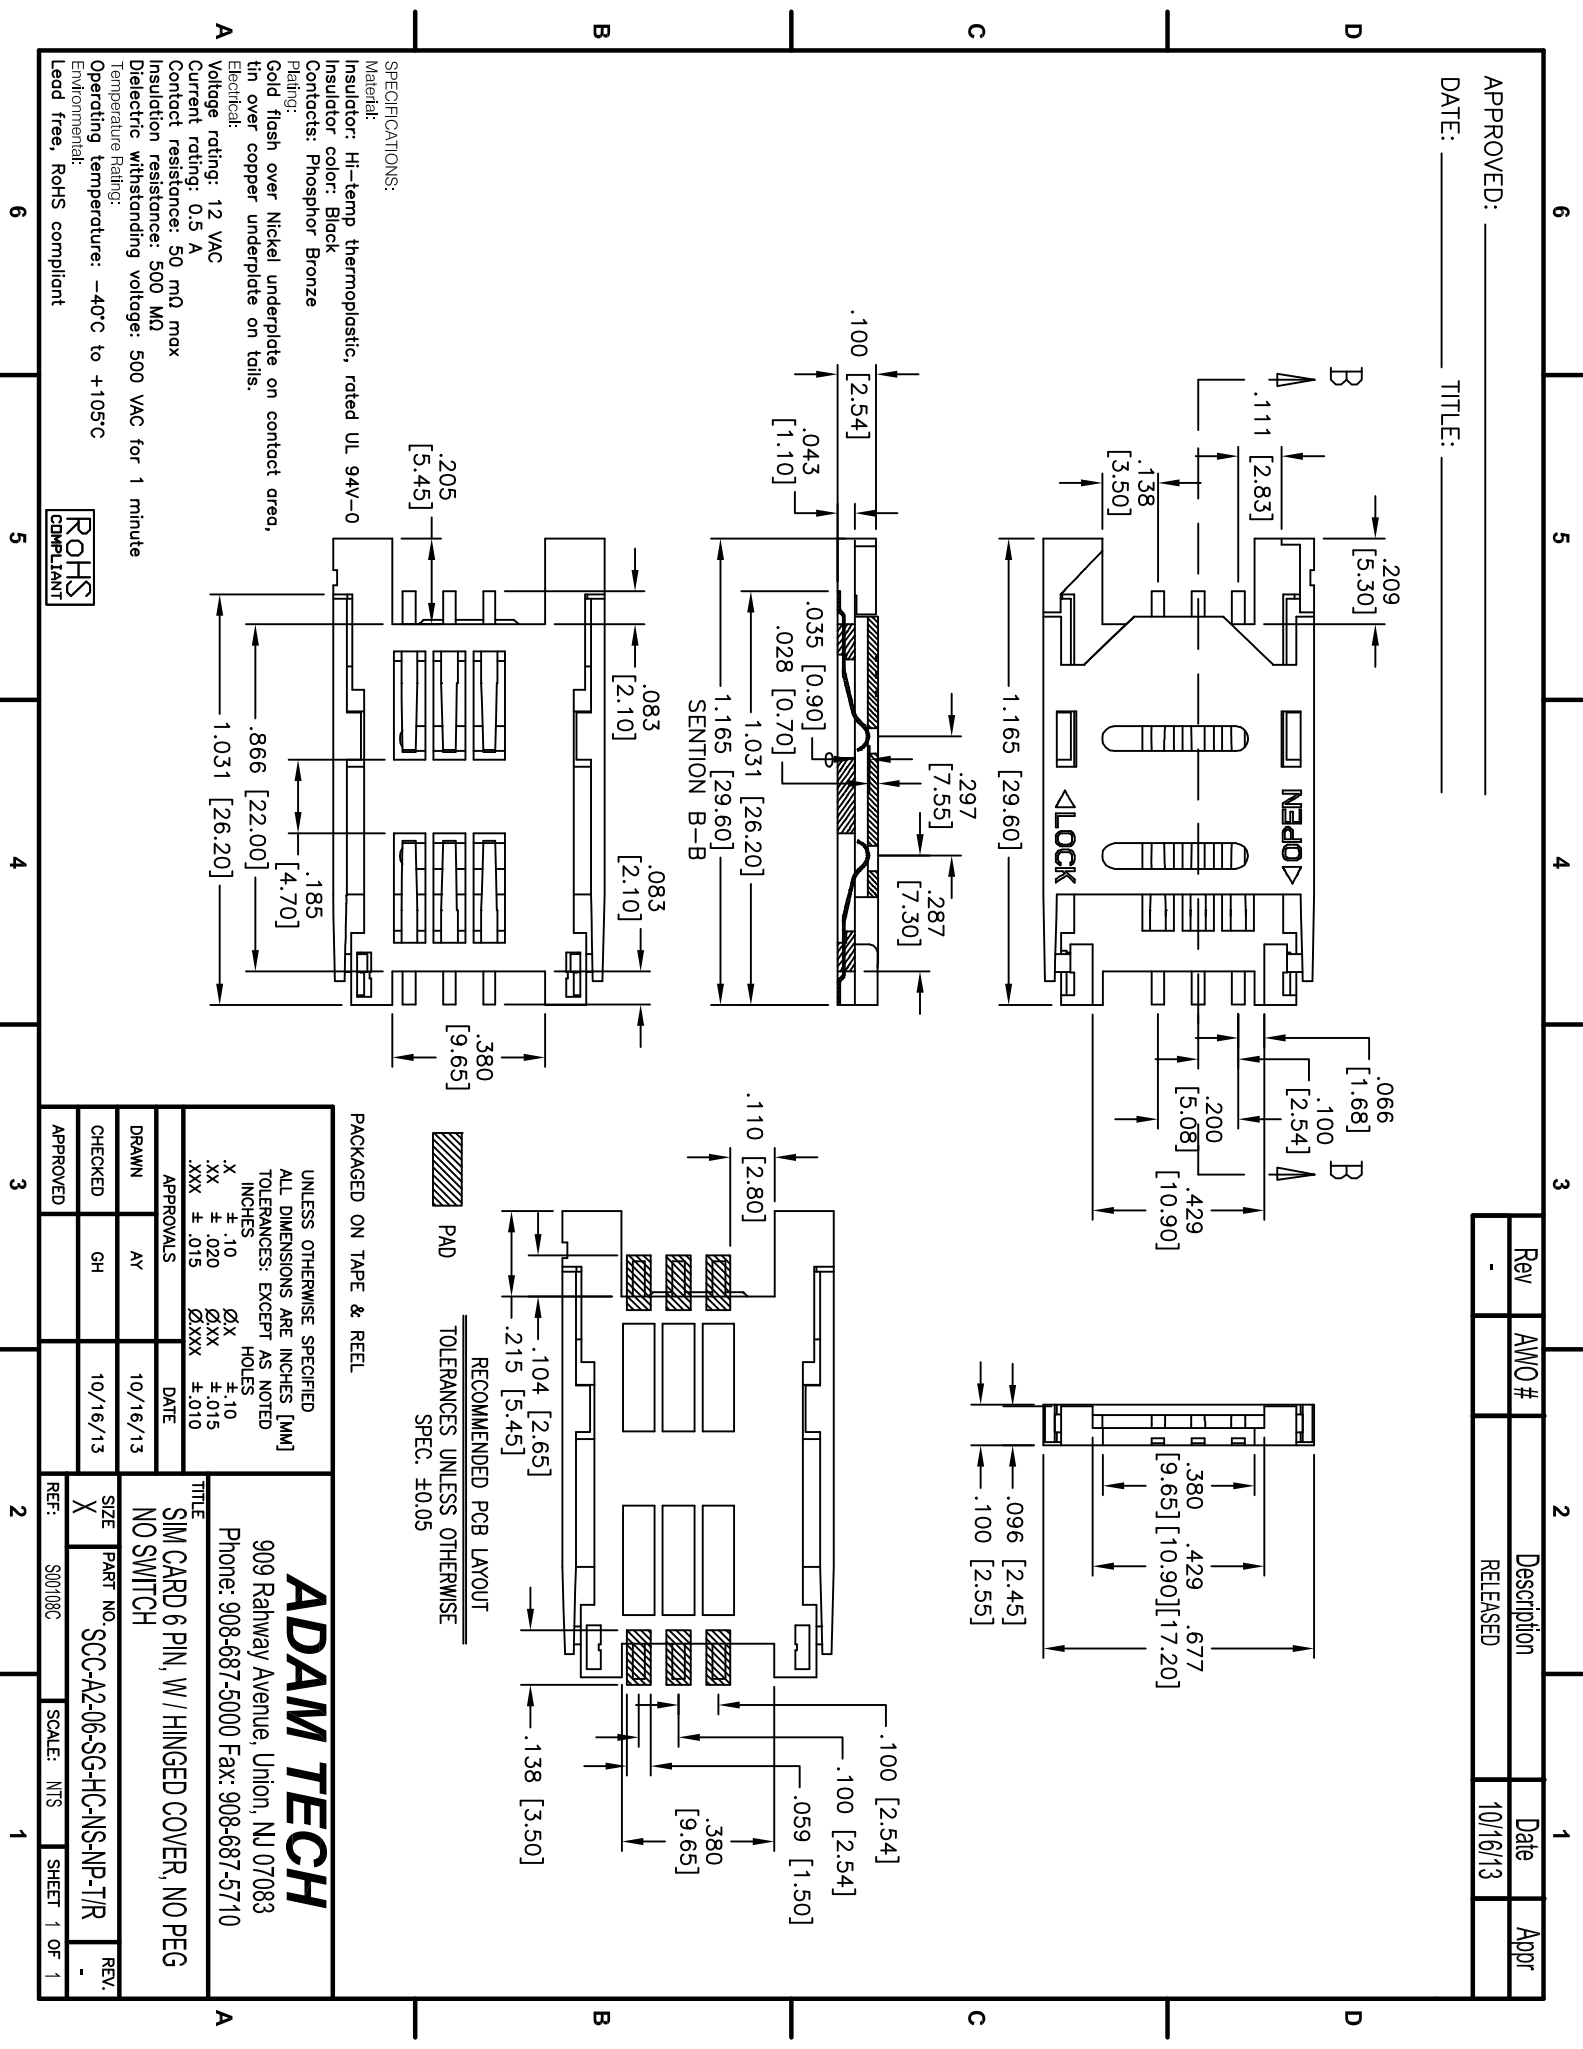

PAD
 RECOMMENDED PCB LAYOUT
 TOLERANCES UNLESS OTHERWISE
 SPEC. ±0.05

PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES EXCEPT AS NOTED
 INCHES HILES

.X	±.10	ØX	±.10
.XX	±.020	ØXX	±.015
.XXX	±.015	ØXXX	±.010
.XXX	±.015	ØXXX	±.010

DATE

ROHS COMPLIANT

SPECIFICATIONS:
 Material: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating:
 Gold flash over Nickel underplate on contact area,
 tin over copper underplate on tails.
 Electrical:
 Voltage rating: 12 VAC
 Current rating: 0.5 A
 Contact resistance: 50 mΩ max
 Insulation resistance: 500 MΩ
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: SIM CARD 6 PIN, W / HINGED COVER, NO PEG NO SWITCH

SIZE: X

PART NO.: SCC-A2-06-SG-HC-NS-NP-T/R

SCALE: NTS

SHEET 1 OF 1

APPROVALS	DATE
DRAWN AY	10/16/13
CHECKED GH	10/16/13
APPROVED	

Rev. 1