
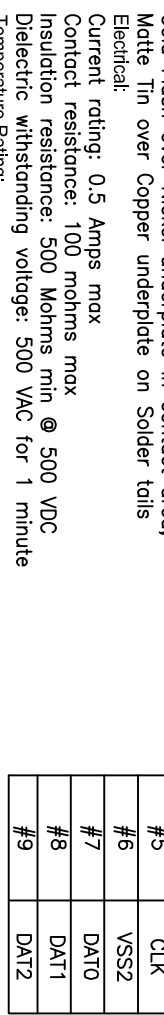
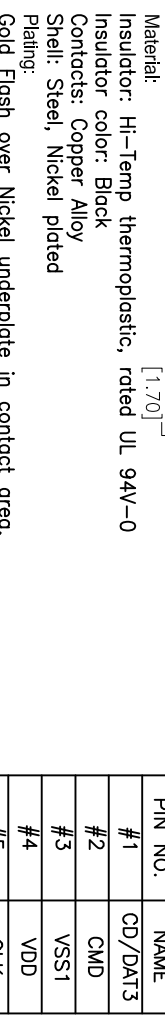
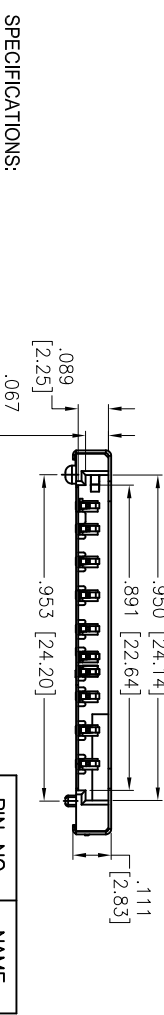
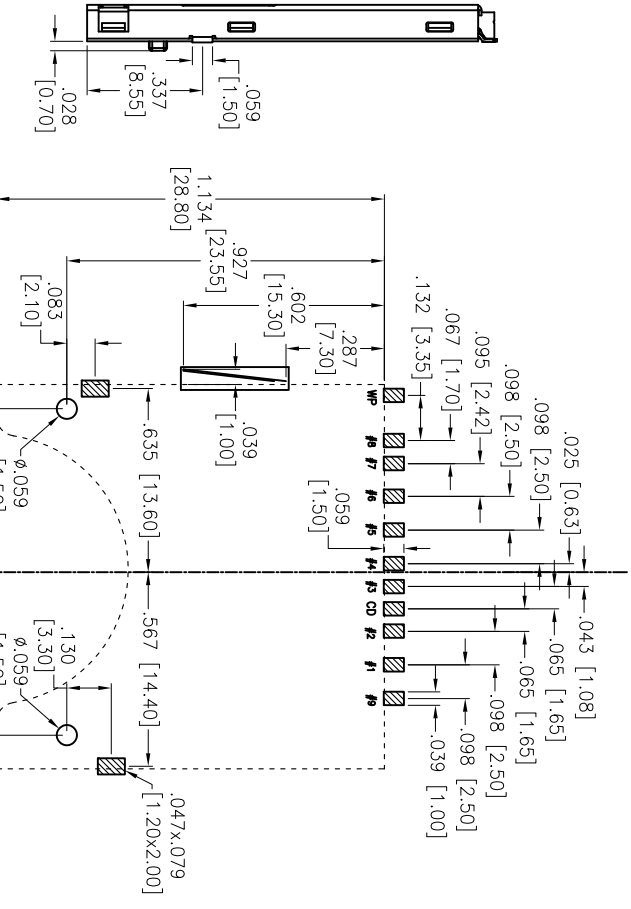


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	07/12/13	
A		REVISED SHAPE	12/9/13	AY/GC

0.12

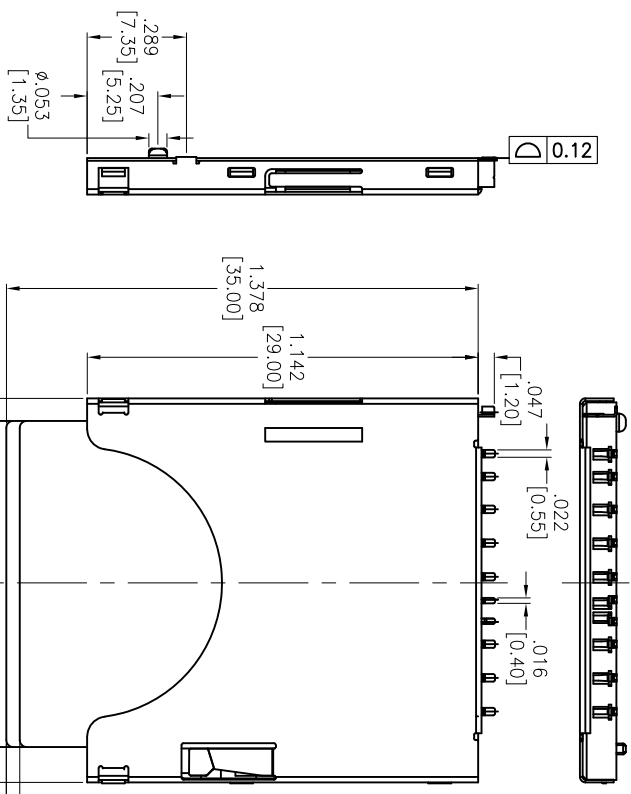


PIN NO.	NAME
#1	CD/DAT3
#2	CMD
#3	VSS1
#4	VDD
#5	CLK
#6	VSS2
#7	DAT0
#8	DAT1
#9	DAT2

SPECIFICATIONS:
 Material: Insulator: Hi-Temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy
 Shell: Steel, Nickel plated
 Plating: Gold Flash over Nickel underplate in contact area, Matte Tin over Copper underplate on Solder tails
 Electrical:
 Current rating: 0.5 Amps max
 Contact resistance: 100 mohms max
 Insulation resistance: 500 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating: Operating temperature: -25°C to +85°C
 Environmental: Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE IN INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES: .X ± .10 ØXX ± .015
 .XX ± .020 ØXXX ± .010
 .XXX ± .015
 APPROVALS: _____ DATE: _____
 DRAWN: TW 07/12/13
 CHECKED: NP 07/12/13
 APPROVED: _____

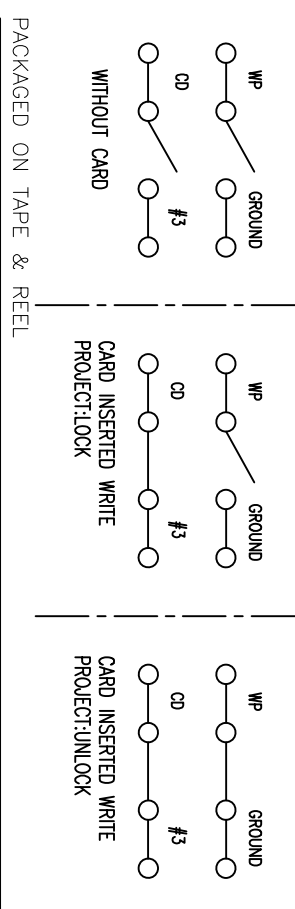

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

ADAM TECH
 SECURE DIGITAL SOCKET, PUSH-PUSH
 CARD LOCK TYPE, SHELL SPOT INSIDE

SIZE: X PART NO: SDP-09L-SG-T/R
 REF: S00708C SCALE: NTS SHEET 1 OF 2