




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-880275~278	2008/03/31	Gao Ling	Add Cross

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

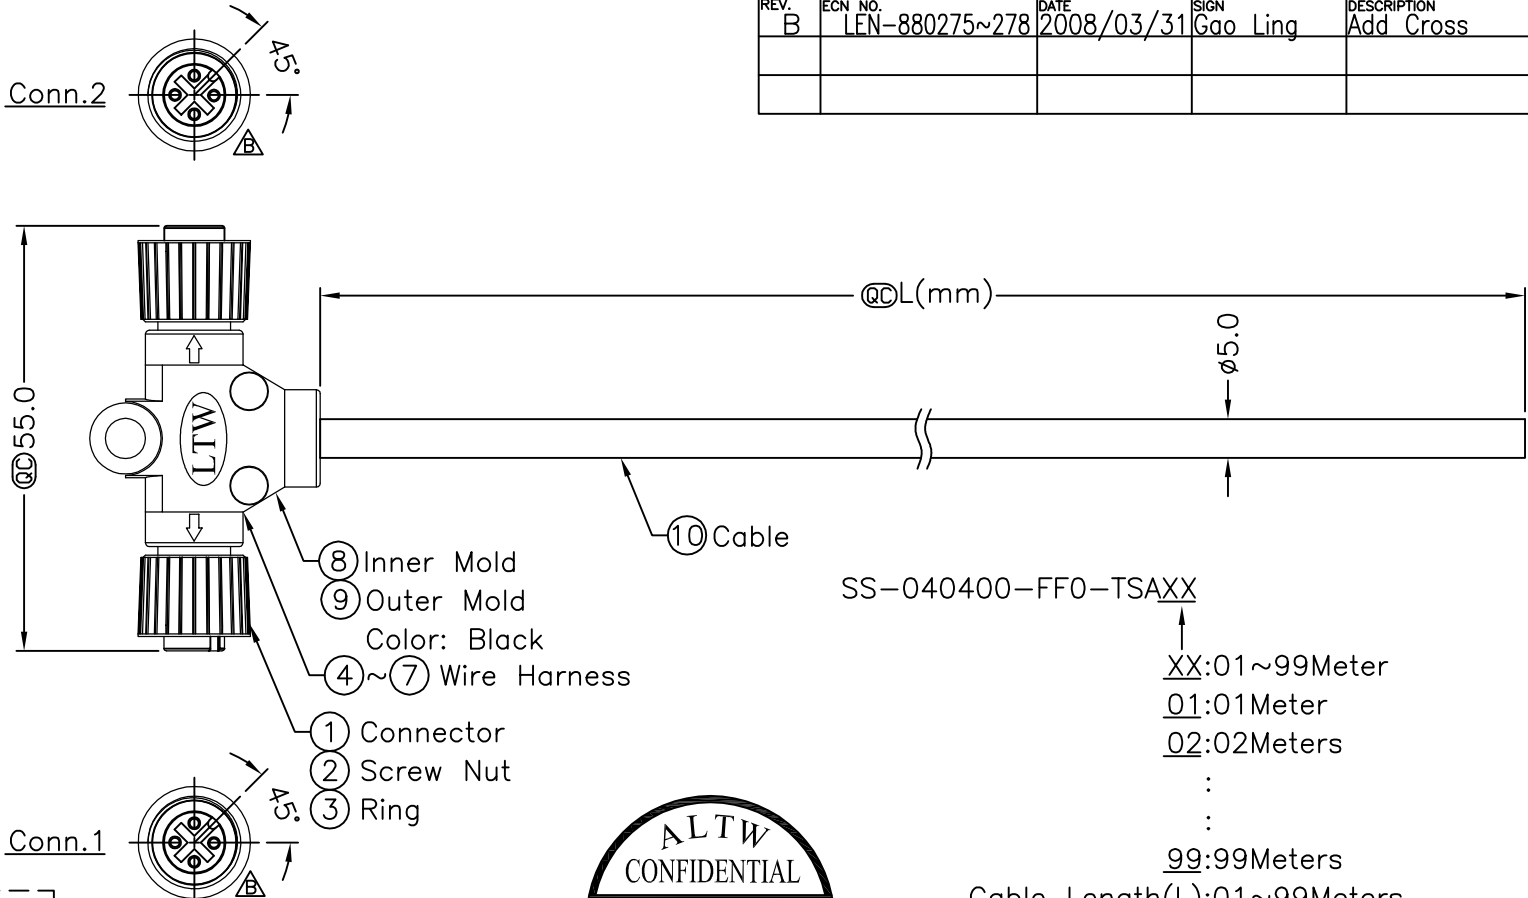


SS-040400-FF0-TSAXX

- XX:01~99Meter
- 01:01Meter
- 02:02Meters
- ⋮
- ⋮
- 99:99Meters

Cable Length(L):01~99Meters

Note:

- * @C Important Dimension.
- * Waterproof Rate: IP68
- * Housing: Black, PU
- * Female Pin: Copper Alloy, Gold Plated
- * Wire Harness: UL1007 24AWG, 4Pcs.
- * Cable: UL2464 22AWG*4C+Talc Black, PVC Jacket UV Resistant OD=5.0mm
- * Cable Length Tolerance: 1M~10M±5%mm, 11M~99±500mm.

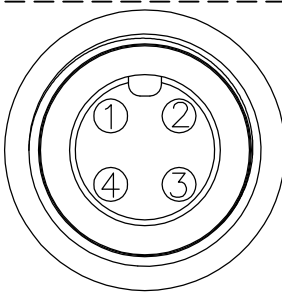

Conn.1 & Conn.2
Pin Assignments
Front View

4	Black	黑	4
3	Blue	藍	3
2	White	白	2
1	Brown	棕	1
Conn.1	Wire Color		Conn.2
Pin Out			

UNIT:mm TOLERANCE ±0.5 mm	TITLE M12 Conn T Cable Screw FF Conn FF Pin		Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Gao Ling	DATE 2008/03/31
	SCALE Free	SHEET 1 OF 1		DWG NO SS-040400-FF0-TSAXX	CHECKED BY Ling	DATE 2008/03/31
	REV. B	SIZE A4		@C :Inspection Item	CUSTOMER ALTW	APPROVED BY Cloud
1	2	3	4	5	6	7