





Cable Ties Polyamide 6.6 standard


• T-Series in PA66 black



T18S – T255M

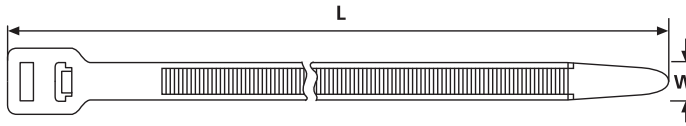

T250-Series

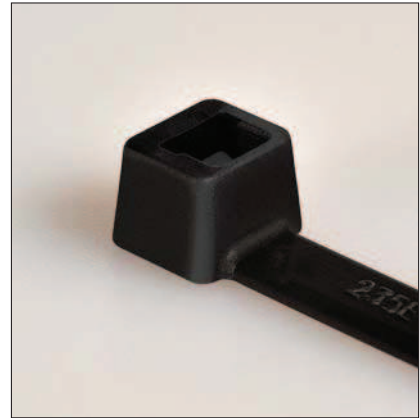

Material Data	
Material	Polyamide 6.6 (PA66)
Operating Temperature	-40 °C to +85 °C Continuous, (+105 °C for 500 h)
Flammability	UL94 V2



Technical Table

Article-No.	Type	Length (L)	Width (W)	Bundle Ø max.	Min. Tensile Strength (N)	Material	Colour	Application Tool
Polyamide 6.6 (PA66)								
111-01910	T18R	100	2.5	22.0	80	PA66	Black (BK)	1–3, 5
111-02370	T18I	145	2.5	35.0	80	PA66	Black (BK)	1–3, 5
111-02110	T18L	205	2.5	55.0	80	PA66	Black (BK)	1–3, 5
111-02500	T25L	240	2.8	65.0	110	PA66	Black (BK)	1–3, 5
111-03210	T30R	150	3.5	35.0	135	PA66	Black (BK)	1–3, 5
111-03410	T30L	198	3.5	50.0	135	PA66	Black (BK)	1–3, 5
111-03500	T30LL	290.0	3.5	80.0	135	PA66	Black (BK)	1–3, 5
111-05810	T50S	150.0	4.6	35.0	225	PA66	Black (BK)	1–10
111-05000	T50R	200	4.6	50.0	225	PA66	Black (BK)	1–10
111-06200	T50M	245.0	4.6	65.0	225	PA66	Black (BK)	1–10
111-05210	T50I	300	4.6	85.0	225	PA66	Black (BK)	1–10
111-05400	T50L	390.0	4.6	110	225	PA66	Black (BK)	1–10
111-06002	T50LL	445	4.6	130	225	PA66	Black (BK)	1–10
111-08010	T80R	210	4.7	55.0	355	PA66	Black (BK)	1–10
111-08210	T80I	300	4.7	85.0	355	PA66	Black (BK)	1–10
111-05410	T80L	390	4.7	110	355	PA66	Black (BK)	1–10
111-12210	T120I	300	7.6	80.0	535	PA66	Black (BK)	6–10
111-12010	T120R(E)	387	7.6	100	535	PA66	Black (BK)	6–10
111-12610	T120M	460	7.6	130	535	PA66	Black (BK)	6–10
111-12701	T120XM	600	7.6	175	535	PA66	Black (BK)	6–10
111-12403	T120L	760	7.6	225	535	PA66	Black (BK)	6–10
111-14810	T150R	365	7.6	100	670	PA66	Black (BK)	6–10
111-00124	T150M	525	8.9	150	780	PA66	Black (BK)	6–9
111-15405	T150L	820	8.9	245	780	PA66	Black (BK)	6–9
111-15500	T150XL	1095	8.9	330	780	PA66	Black (BK)	6–9
111-15300	T150XLL	1325	8.9	405	780	PA66	Black (BK)	6–9
111-25102	T250X	370	12.5	100	1115	PA66	Black (BK)	7–9
111-25001	T250M	565	12.5	150	1115	PA66	Black (BK)	7–9
111-24601	T250L	880	12.5	254	1115	PA66	Black (BK)	7–9
111-25200	T250XL	1030	12.5	305	1115	PA66	Black (BK)	7–9

All dimensions in mm. Subject to technical changes.



Please note! Not all products listed on this page may have this approval. For product specific approvals please refer to the Appendix.