


- NOTE:**
1. 100% TEST OPEN SHORT
 2. INSULATION RESISTANCE: 10M ohm(MIN)
 3. CONDUCTOR RESISTANCE : 1 ohm (MAX)
 4. HI POT TEST : 300V DC/10ms

PIN ASSIGNMENT



NO.	DESCRIPTION
8	CONDUCTIVE COPPER FOIL W:20MM
7	Heat shrink tube OD:2.0mm BLACK
6	Heat shrink tube OD:0.6mm BLACK
5	PVC 50P BLUE
4	BACK SHELL NICKEL-PLATE (USB 3.0 A/M)
3	FRONT SHELL NICKEL-PLATE (USB 3.0 A/M)
2	USB 3.0 A MALE PBT: BLUE 15U" SHELL: NICKEL PLATED
1	UL20276 (28#*1P+D+AL .M)*2C+28#1P+24#2C+AB OD:5.5 BLUE

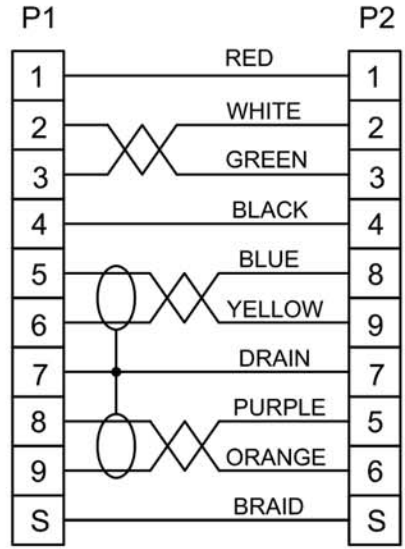

TOLERANCE (mm)	APPROVALS	DATE	TITLE	Amphenol Amphenol European Design Center	
X.X ±0.30	DRAWN Stephane	14/Apr/2015	USB 3.0 A/M to A/M L:1.5M	Scale N.A.	Sheet 1 of 1
X.XX ±0.20	CHECKED Rob	14/Apr/2015			
X.XXX ±0.15	APPROVED Rob	14/Apr/2015			
UNLESS OTHERWISE SPECIFIED	UNIT : mm	SIZE : A4	DRAWING N° TCR-01512	REV. B	