


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for the manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

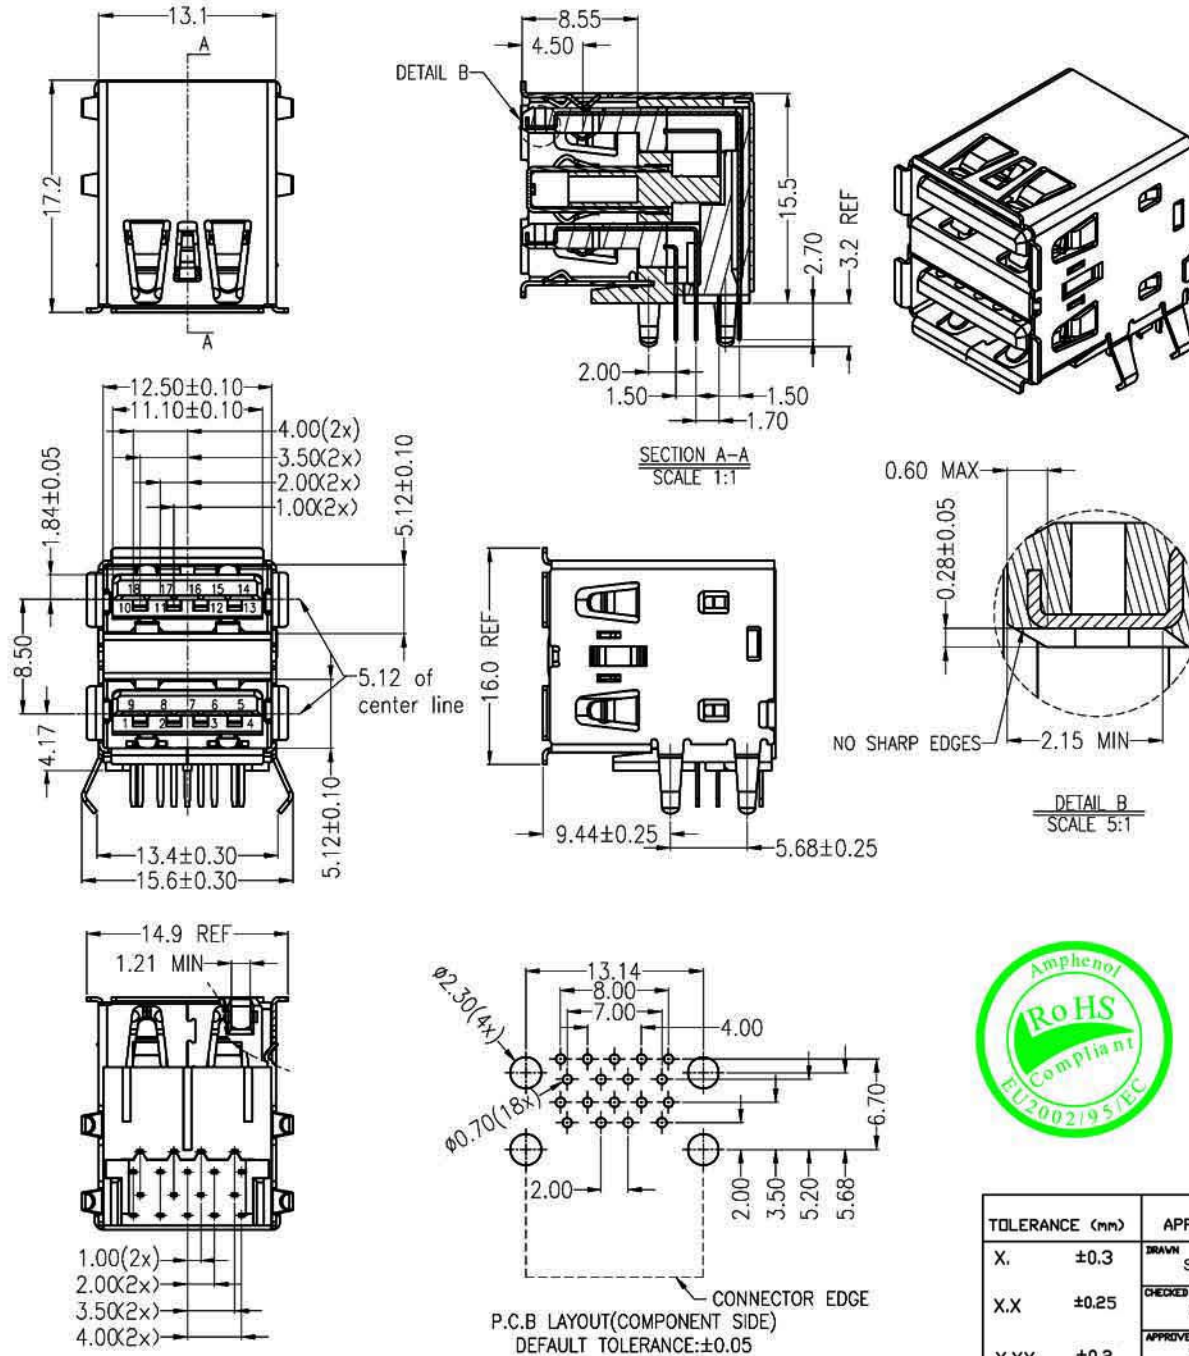

Specification:

1. Current Rating: 1.8AMP for Pin1 and Pin4, 0.25AMP for Other contacts .
2. Voltage Rating: 30V.
3. Insulation Resistance: **1000MΩ** Min.
4. Contact Resistance: 30mΩ Max for Pin1 & Pin4 and Pin10 & Pin13; 50mΩ Max for Other contacts.
5. Dielectric Withstanding Voltage: 100V AC (RMS)

Ordering Information

TUEA9FCDX
 X: contact plating
 0: G/F
 2: 15u" gold

N.O	PART NAME	MATERIAL	QTY	REMARK
11	5p short terminal	C2680	5P	T=0.2mm
10	5p long terminal	C2680	5P	T=0.2mm
9	4p short terminal	C5191	4P	T=0.2mm
8	4p long terminal	C5191	4P	T=0.2mm
7	Middle cover	SUS 304	1Pcs	T=0.3mm
6	Cover	SPCC	1Pcs	T=0.3mm
5	Shell	SPCC	1Pcs	T=0.3mm
4	Stopper	PBT	1Pcs	Blue
3	Insert mold short conector	PBT	1Pcs	Blue
2	Insert mold long conector	PBT	1Pcs	Blue
1	Housing	PBT	1Pcs	Blue
N.O	PART NAME	MATERIAL	QTY	REMARK



TOLERANCE (mm)	APPROVALS	DATE	TITLE
X. ±0.3	DRAWN Stephane	2010/Mar/21	USB 3.0 A Type Receptacle 2Ports Stacked
X.X ±0.25	CHECKED Rob	2010/Mar/21	
X.XX ±0.2	APPROVED Rob	2010/Mar/21	
UNLESS OTHERWISE SPECIFIED	UNIT: mm	SIZE: A4	DRAWING N° TUEA9FCDX

Amphenol
 Amphenol European Design Center

Scale N.A. Sheet 1 of 1

REV. A