
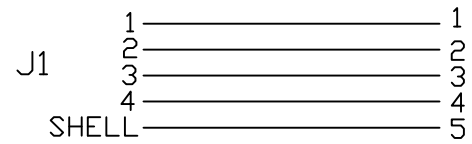



DRAWING



- 1.CABLE:UL2725,USB CABLE,28AWG(7/0.12mm)x1PAIRS
+24AWG(7/0.2mm)x2C,TIN COPPER
SHIELD:AL-FOIL+7/0.1mmDRAIN WIRE+2x16/0.1mm
BRAID TIN COPPER
JACKET:PVC,Ø.D:4.8mm±0.2mm,COLOR:GREY COLOR
- 2.CONNECTOR:1 PCS USB B SOLDER FEMALE
- 3.HOOD:MOULDING TYPE,COLOR:GREY
- 4.1 PCS 5 PIN IDE FEMALE,COLOR:BLACK
- 5.1 PCS TUBE
- 6.Fulfill ROHS Guideline
- 7.ELECTRONIC TEST:100% OPEN SHORT+MISS WIRE TEST

PART NO	USBBJ-1	SHEET NO	1	 THIRD ANGLE PROJECTION			
TITLE:USB B FEMALE TO 5P IDE FEMALE L:1M,UL2725,GREY COLOR				SCALE	N.T.S		DRAWN BY & DATE
				SIZE	A4		CHECKED BY & DATE
DWN NO				UNIT			APPROVED BY & DATE
				<input checked="" type="checkbox"/> mm	<input type="checkbox"/> INCH		