


# Lithium (2CR5)



## Industry Standard Dimensions (millimeters)

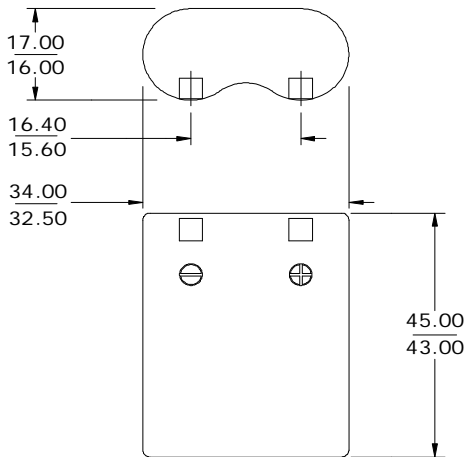

This battery contains a Positive Temperature Coefficient (PTC) safety device to limit current during short circuit conditions.

## Simulated Application Tests



Typical Use Performance

Type (time)	Drain (mA)	Load (ohms)	Cutoff Voltage		
			4.0V (21°C) (hours)	3.6V (21°C) (pulses)	3.1V (21°C) (pulses)
Capacity (continuous)	---	200	58	---	---
Photoflash (3 / 27 sec)	900	---	---	---	2000
Photoflash (3 / 27 sec)	1200	---	---	1370	---
Photoflash (3 / 7 sec)	1800	---	---	860	---

## Specifications

- Classification:** "Lithium Photo"
- Chemical System:** Lithium / Manganese Dioxide (Li/MnO<sub>2</sub>)
- Designation:** IEC-2CR5
- Nominal Voltage:** 6.0 Volts
- Storage Temp:** -40°C to 60°C
- Operating Temp:** -40°C to 60°C
- Typical Capacity:** 1500 mAh (to 4.0 volts) (rated at 200 ohms at 21°C)
- Typical Weight:** 40 grams
- Typical Volume:** 26 cubic centimeters
- Max Discharge:** 1500 mA continuous (3500 mA pulse)
- Max Rev Charge:** 2 uA
- Typical Li Content:** 1.15 grams
- Shipping:** For complete details, please reference:  
 Global (except US): Special Provision A45 of the International Air Transport Association Dangerous Goods Regulations  
 United States: 49 CFR 173.185

## Typical Discharge Characteristics

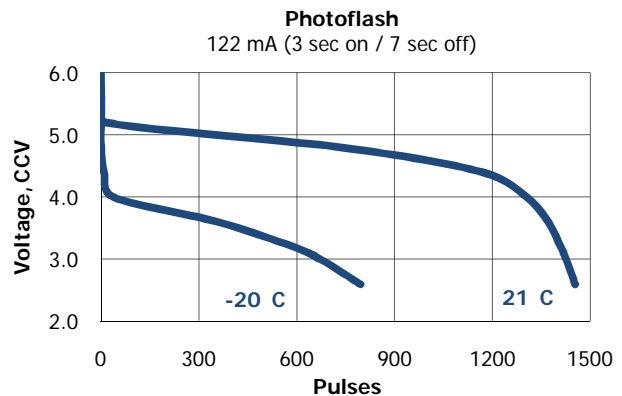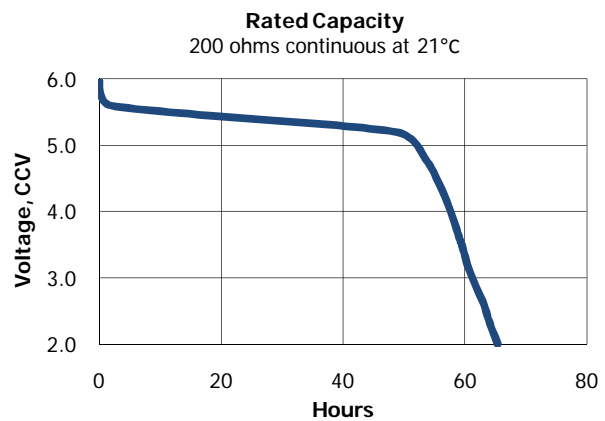

### Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.

©Energizer Holdings, Inc. - All Rights Reserved