SIEMENS

Product data sheet 3RV2411-1JA10



CIRCUIT-BREAKER SZ S00, FOR TRANSFORMER PROT. A-RELEASE 7...10A, N-RELEASE 208A, SCREW CONNECTION, STANDARD SW. CAPACITY

General technical data:				
product brand name		SIRIUS		
Product designation		3RV2 circuit breaker		
Size of the circuit-breaker		S00		
Number of poles / for main current circuit		3		
Product function				
 removable terminal for auxiliary and control circuit 		No		
overload protection		Yes		
phase disturbance recognition		Yes		
short-circuit to earth recognition		No		
Product component				
auxiliary switch		No		
undervoltage release mechanism		No		
• trip indicator		No		
Product extension				
auxiliary switch		Yes		
optional / motor drive		No		
Impulse voltage resistance / rated value	kV	6		
Protection class IP / on the front		IP20		
Protection against electrical shock		finger-safe		

Installation altitude / at a height over sea level / maximum	m	2,000		
Ambient temperature		711		
during transport	°C	-50 +80		
during storage	°C	-50 +80		
during operating	°C	-20 +60		
Active power loss / total / typical	W	8.7		
Main circuit:				
Operating voltage / rated value	V	690		
Service power / at AC-3				
at 400 V / rated value	W	4,000		
at 500 V / rated value	W	5,500		
• at 690 V / rated value	W	7,500		
Operating current / at AC-3 / at 400 V / rated value	Α	10		
Mechanical operating cycles as operating time / of the main contacts / typical		100,000		
Frequency of operation / with AC-3 / maximum	1/h	15		
Auxiliary circuit:				
Number of changeover contacts / for auxiliary contacts		0		
Mechanical operating cycles as operating time / of the auxiliary contacts / typical		100,000		
Protection function:				
Trip class		CLASS 10		
Trip class Adjustable response current / of the current-dependent overload release	A	CLASS 10 7 10		
Adjustable response current / of the current-dependent	А			
Adjustable response current / of the current-dependent overload release	A			
Adjustable response current / of the current-dependent overload release Safety:	A %			
Adjustable response current / of the current-dependent overload release Safety: Proportion of dangerous failures	-	7 10		
Adjustable response current / of the current-dependent overload release Safety: Proportion of dangerous failures • with high demand rate / according to SN 31920	%	7 10		
Adjustable response current / of the current-dependent overload release Safety: Proportion of dangerous failures • with high demand rate / according to SN 31920 • with low demand rate / according to SN 31920 Failure rate (FIT value) / with low demand rate / according to SN	%	7 10 40 40		
Adjustable response current / of the current-dependent overload release Safety: Proportion of dangerous failures • with high demand rate / according to SN 31920 • with low demand rate / according to SN 31920 Failure rate (FIT value) / with low demand rate / according to SN 31920	%	7 10 40 40 50		
Adjustable response current / of the current-dependent overload release Safety: Proportion of dangerous failures • with high demand rate / according to SN 31920 • with low demand rate / according to SN 31920 Failure rate (FIT value) / with low demand rate / according to SN 31920 B10 value / with high demand rate / according to SN 31920 T1 value / for proof test interval or service life / according to IEC	% % FIT	7 10 40 40 50 50,000		
Adjustable response current / of the current-dependent overload release Safety: Proportion of dangerous failures • with high demand rate / according to SN 31920 • with low demand rate / according to SN 31920 Failure rate (FIT value) / with low demand rate / according to SN 31920 B10 value / with high demand rate / according to SN 31920 T1 value / for proof test interval or service life / according to IEC 61508	% % FIT	7 10 40 40 50 50,000		
Adjustable response current / of the current-dependent overload release Safety: Proportion of dangerous failures • with high demand rate / according to SN 31920 • with low demand rate / according to SN 31920 Failure rate (FIT value) / with low demand rate / according to SN 31920 B10 value / with high demand rate / according to SN 31920 T1 value / for proof test interval or service life / according to IEC 61508 Installation/mounting/dimensions:	% % FIT	7 10 40 40 50 50,000 10 screw and snap-on mounting onto 35 mm standard		
Adjustable response current / of the current-dependent overload release Safety: Proportion of dangerous failures • with high demand rate / according to SN 31920 • with low demand rate / according to SN 31920 Failure rate (FIT value) / with low demand rate / according to SN 31920 B10 value / with high demand rate / according to SN 31920 T1 value / for proof test interval or service life / according to IEC 61508 Installation/mounting/dimensions: Mounting type	% % FIT	7 10 40 40 50 50,000 10 screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715		

Connections:				
Arrangement of electrical connectors / for main current circuit		Top and bottom		
Design of the electrical connection				
for main current circuit		screw-type terminals		
Type of the connectable conductor cross-section				
for main contacts				
• finely stranded				
 with conductor end processing 		2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)		
• for AWG conductors / for main contacts		2x (18 14), 2x 12		

UL/CSA ratings:				
yielded mechanical performance (hp)				
 for single-phase squirrel cage motors 				
• at 110/120 V / rated value	hp	0.5		
• at 230 V / rated value	hp	1.5		
• for three-phase squirrel cage motors				
• at 200/208 V / rated value	hp	2		
• at 220/230 V / rated value	hp	3		
• at 460/480 V / rated value	hp	5		
• at 575/600 V / rated value	hp	7.5		
Full-load current (FLA) / for 3-phase motor				
• at 480 V / rated value	Α	7.6		
• at 600 V / rated value	Α	9		

Certificates/approvals:

General Product Approval	Declaration of	Test Certificate
	Conformity	











Shipping Approval













Shipping Approval





other
Confirmation



other

Environmental Confirmations

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall

Cax online generator:


http://www.siemens.com/cax


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


http://support.automation.siemens.com/WW/view/en/3RV2411-1JA10/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RV2411-1JA10

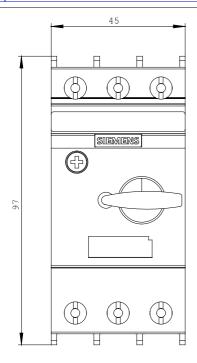

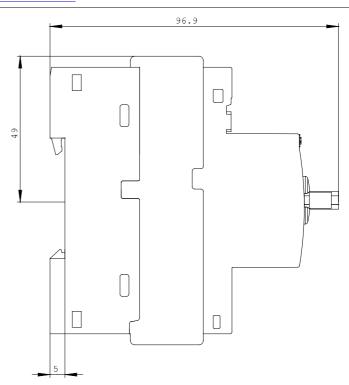

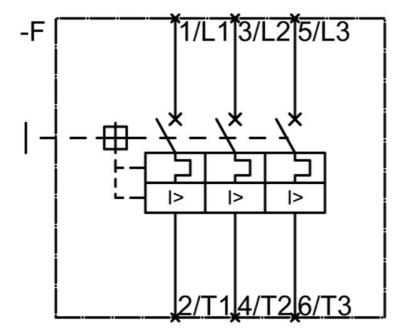

last change: Apr 5, 2014