

Models

Single output

# Series AMER90-AZ

up to 3.75A AC-DC / DC-DC LED Driver / Converter



#### FEATURES:

- AC-DC Constant Current or Constant Voltage LED Driver
- Input range 90-305VAC/47-440Hz
- High Efficiency up to 88%
- Operating temperature -40 to 85°C
- Dimmable via resistive
- 5 Years Limited Warranty

- Over Temperature Protection
- Over Current Protection
- Waterproof Case rated IP68
- Power Factor Correction
- Short Circuit Protection



Model		Output Input Current Voltage		Mode of Operation	Efficiency (%)				
woder	Power (W) <sup>①</sup>	Range (V) <sup>③</sup>	(A) <sup>3</sup>	Voltage (VAC/Hz)	Voltage (VDC)		115 vac	230 VAC	277 VAC
		00.50	4.0	00.005/47.440	100,100	Constant Current	87	86	86
AMER90-50180AZ	90	36-50	1.8	90-305/47-440	130-430	Constant Voltage <sup>(2)</sup>	88	87	87
	00	04.00	0.5	00 005/47 440	100,100	Constant Current	87	87	87
AMER90-36250AZ	90	24-36	2.5	90-305/47-440	130-430	Constant Voltage <sup>2</sup>	88	87	87
	00	40.04	0.75	00 005/47 440	400.400	Constant Current	86	86	86
AMER90-24375AZ	90	90 12-24 3.75	90-305/47-440 130-430	130-430	Constant Voltage <sup>2</sup>	87	86	86	
Add suffix "-F"	No dimm	ning option							

<sup>®</sup>Exceeding the maximum output power will permanently damage the converter.

<sup>®</sup>The dimming feature is not supported when units are used in Constant Voltage mode only, Aimtec suggests to order "-F" No dimming option in the case.

<sup>®</sup> In constant current mode output current is maximum shown, in constant voltage mode output voltage is the maximum shown. All models can be ordered with optional North American colour input wires (black (L), white (N), green (GND)). Add "–NA" to part number when ordering.

NOTE: Aimtec limited warranty of 5 years is valid based on product operation at datasheet specifications at ambient temperature of 25°C, humidity<75%, nominal input voltage (115/230/277VAC) and at rated output load unless otherwise specified. See

http://www.aimtec.com/terms-saleAMER90-AZ's AC/DC LED drivers have electrical safeguards designed within to protect it from conventional electrical abnormalities with the levels listed in the safety table. Applications for use within rural agricultural, heavy industrial, and other areas or regions which are prone to 'dirty' electrical conditions which would subject any of the above models to excessive voltages surges or spikes, may damage or cause early life failure of product. In this case consideration should be made by the end user to ensure that adequate line or mains surge suppression is installed in front of Aimtec device to ensure the longevity of the products. Failure to identify excessive line surges violations prior to installation may damage sensitive equipment permanently.

## Input Specifications

Parameters	Conditions	Typical	Maximum	Units
	115 VAC		1500	mA
Current (full load)	230 VAC		600	mA
	277 VAC		500	mA
	115 VAC		40	А
Inrush current <2ms(cold start)	230 VAC		50	А
	277 VAC		60	А
Lookogo ourrent	I/O		0.25	mA
Leakage current	I/FG, O/FG		3.5	mA
	115 VAC	0.98		
Power factor	230 VAC	0.94		
	277 VAC	0.90		
External fuse	Recommended slow blow type	2.5		А
Start-up time		1000		ms



## **Series AMER90-AZ**

up to 3.75A | AC-DC / DC-DC | LED Driver / Converter

## **Output Specifications**

Parameters	Conditions	Typical	Maximum	Units		
Current accuracy		±3		%		
Line regulation	(LL-HL)	±2		%		
Load regulation	0-100% load	±3		%		
Ripple & Noise*		150		mV p-p		
Hold-up time		100		ms		
Current adjustment range <sup>5</sup>		100-10		%		

<sup>(3)</sup> Ripple and Noise are measured at 20MHz bandwidth by using a  $0.1\mu$ F (M/C) or (C/C) and  $47\mu$ F (E/C) parallel capacitor. <sup>(5)</sup> Note: from 0% to 10% dimming adjustment signal instability may be present.

#### **Isolation Specifications**

Parameters		Conditions	Typical	Rated	Units
	I/O	3sec		3750	VAC
Tested voltage	I/FG			2000	VAC
	O/FG			500	VAC
Isolation resistance		500VDC	>1000		MΩ

## **General Specifications**

Parameters	Conditions	Typical	Maximum	Units		
Switching frequency			125	KHz		
Over current protection		≧105		%		
Over voltage protection	Refer	Refer to Constant Current vs. Constant Voltage Mode curve				
Short circuit protection		Continuous				
Short circuit restart		Auto recovery				
Over temperature protection		>105°C				
Operating temperature	See derating table	-40 to +85		°C		
Maximum case temperature			100	°C		
Storage temperature		-40 to +95		°C		
Temperature coefficient		±0.02		% / °C		
Cooling	Free air convection					
Humidity	Non condensing		95	% RH		
Case material	Aluminum					
Potting	Epoxy (IP67 rated)					
Wires	UL1015 18AWG Input & 14AWG Output *20CM					
Weight	900 g					
Dimensions (L X W X H)	7.13 x 2.32 x 1.85 inches 181.00 x 59.00 x 47.00 mm					
MTBF	>400,000 hrs (MIL-HDBK-217F at +25°C)					


## **Safety Specifications**

Parameters					
Agency approvals	cULus, CE				
	UL8750, UL60950-1, EN55022, class B, EN60529(IP68), EN61347-1, EN61347-2-13				
	Information Technology Equipment	EN55022 Class B			
	Harmonic Current Emissions	IEC/EN 61000-3-2, Class C			
	Voltage fluctuations and flicker	IEC/EN 61000-3-3, (EN60555-3)			
Standards	Electrostatic Discharge Immunity	IEC 61000-4-2 Level 3			
	RF, Electromagnetic Field Immunity	IEC 61000-4-3 Level 2			
	Electrical Fast Transient / Burst Immunity	IEC 61000-4-4 Level 2			
	Surge Immunity	IEC 61000-4-5 Level 3			
	RF, Conducted Disturbance Immunity	IEC 61000-4-6 Level 2			
	Power frequency Magnetic Field Immunity	IEC 61000-4-8 Level 1			
	Voltage dips, Short Interruptions Immunity	IEC 61000-4-11			



up to 3.75A AC-DC / DC-DC LED Driver / Converter

## Dimensions

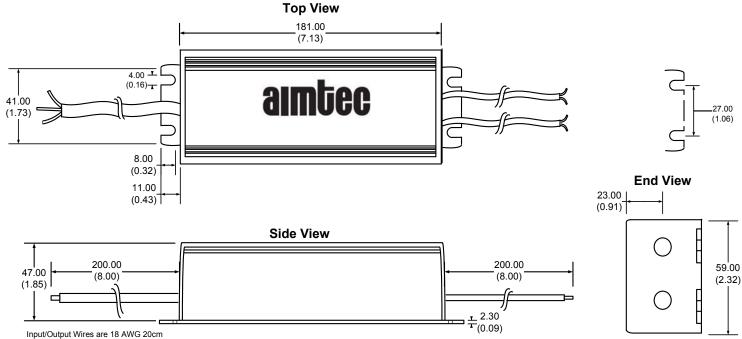


Measurements in Millimeters (inch) Case Tolerance: ±0.5 (±0.02)

## Wire connection:

Wire	Connection	
Brown	AC L	
Blue	AC N	
Green	Ground	
Red	+V output	
Black	-V Output	
Blue (Dimming)	+ Vs dimming	
White (Dimming)	-Vs dimming	

## Analog (resistive) Dimming Application Circuit

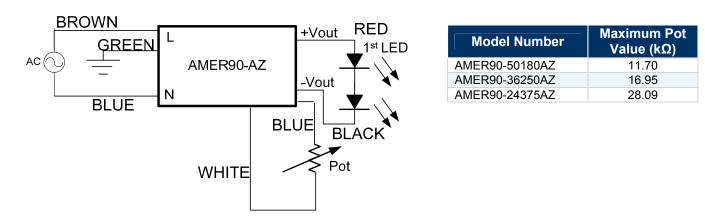





# Series AMER90-AZ


up to 3.75A | AC-DC / DC-DC | LED Driver / Converter

## Analog (0-10V) Dimming Application Circuit

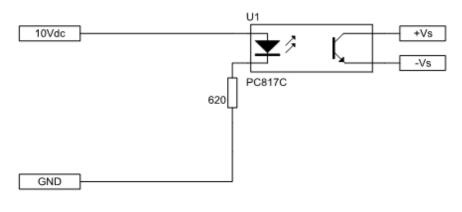

## **PWM (1KHz) Dimming Application Circuit**

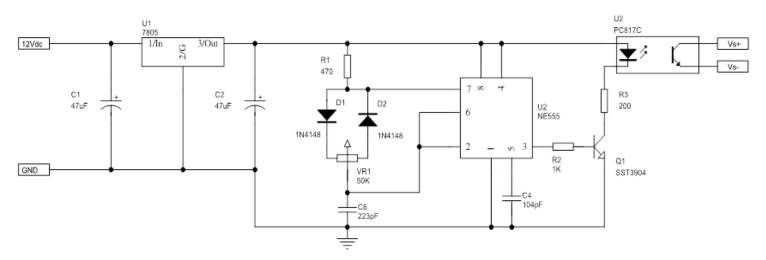

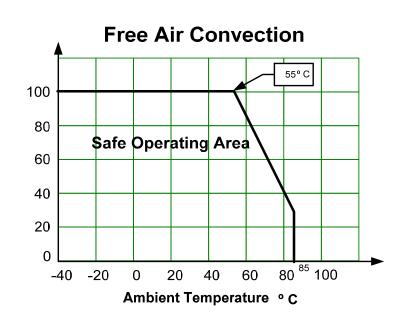


## **Temperature Graph**

www.aimtec.com




## Efficiency vs. Input Voltage and Output Current (CC Load)

#### AMEPR90-50180AZ

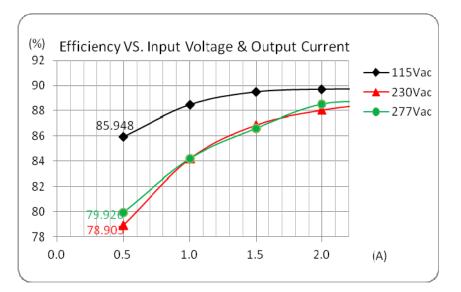


#### AMER90-36250AZ

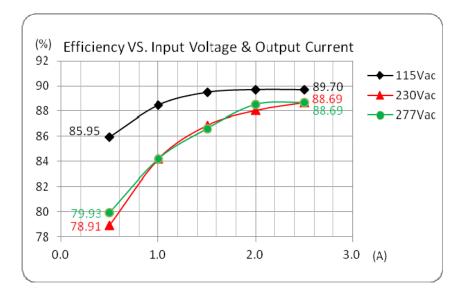




# Efficiency vs. Input Voltage and Output Current (CC Load) (continued)

#### AMER90-24375AZ

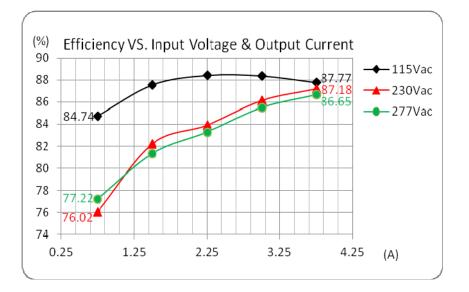

## PFC Value vs. Output Load Current (CC Load)

#### AMEPR90-50180AZ

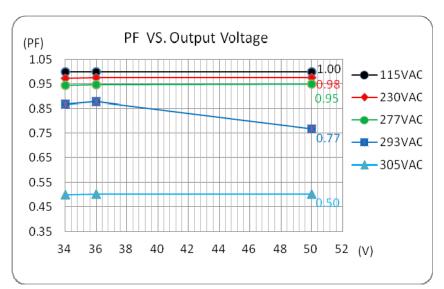





## PFC Value vs. Output Load Current (CC Load)

(continued)

AMER90-36250AZ

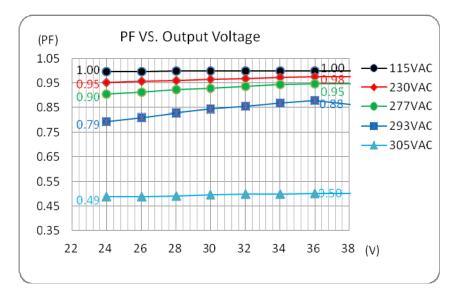


#### AMER90-24375AZ

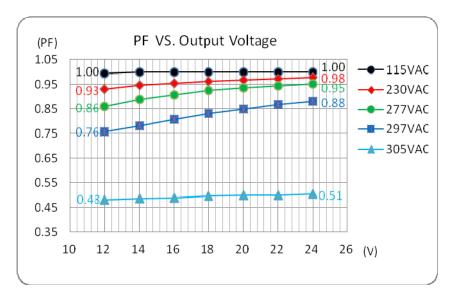




## PFC Value vs. Output Power

AMER90-36250AZ

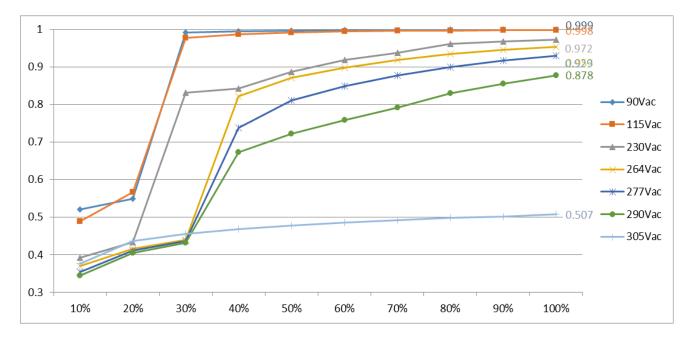


#### AMER90-24375AZ

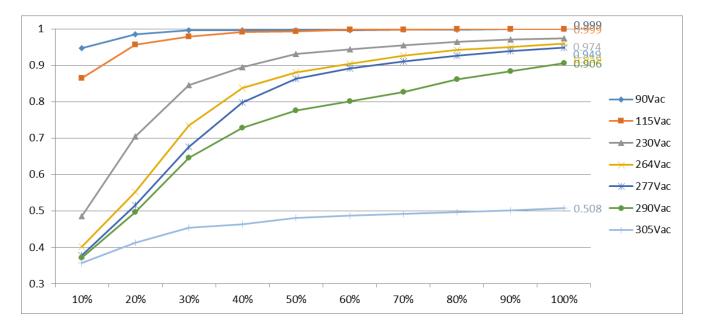




## Constant Current Mode vs. Constant Voltage Mode

#### AMEPR90-50180AZ

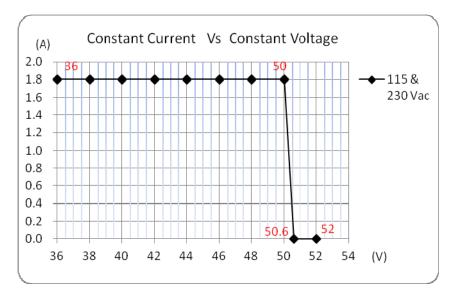

#### AMER90-36250AZ

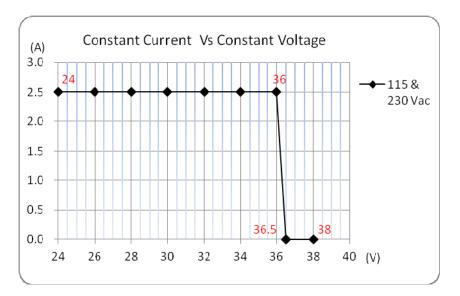




## Constant Current Mode vs. Constant Voltage Mode


(continued)

#### AMER90-24375AZ

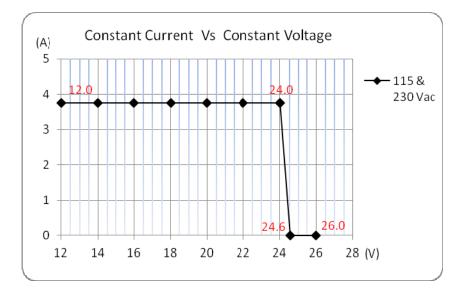

#### Output Current vs. Radj

#### AMEPR90-50180AZ

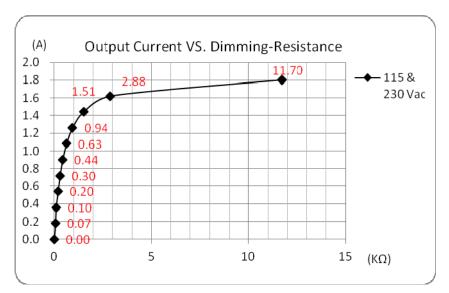





#### **Output Current vs. Radj**

(continued)

#### AMER90-36250AZ

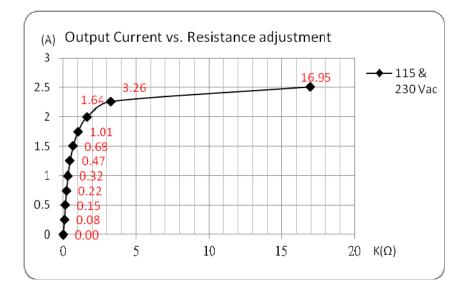

#### AMER90-24375AZ

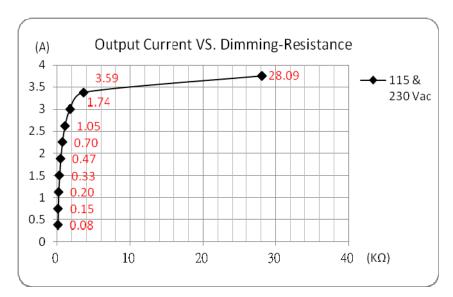

**NOTE: 1.** Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. **2.** Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. **3.** Mechanical drawings and specifications are for reference only. **4.** All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. **5.** Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. **6.** This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. **7.** Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.

Tel: +1 514 620 2722