

Two-line TVS Diode

### **General Description**

The AOZ8222DI-05 is a two-line transient voltage suppressor diode designed to protect voltage sensitive electronics from high transient conditions and ESD.

This device incorporates two TVS diodes in an ultra-small DFN 1.0  $\times$  0.6 package. During transient conditions, the TVS diodes directs the transient to ground. The AOZ8222DI-05 may be used to meet the ESD immunity requirements of IEC 61000-4-2, Level 4 ( $\pm$  15 kV air,  $\pm$  8 kV contact discharge).

The AOZ8222DI-05 comes in an RoHS compliant 3-lead DFN package and is rated over a -40 °C to +85 °C ambient temperature range.

The ultra-small 1.0 mm x 0.6 mm x 0.5 mm DFN package makes it ideal for applications where PCB space is a premium. The small size and high ESD protection makes it ideal for protecting voltage sensitive electronics from high transient conditions and ESD.

#### **Features**


- ESD protection for high-speed data lines:
  - Exceeds IEC 61000-4-2 (ESD): ± 20 kV (air),
    ± 20 kV (contact)
  - Human Body Model (HBM) ± 30 kV
- Small package saves board space
- Low insertion loss
- Low clamping voltage
- Low operating voltage: 5 V

## **Applications**

- Portable handheld devices
- Keypads, data lines, buttons
- Notebook computers
- Digital Cameras
- Portable GPS
- MP3 players




## **Typical Application**



Unidirection Protection of Two Line

# **Pin Configuration**





## **Ordering Information**

Part Number	Ambient Temperature Range	Package	Environmental			
AOZ8222DI-05	-40 °C to +85 °C	DFN 1.0 x 0.6-3L	Green Product			



AOS Green Products use reduced levels of Halogens, and are also RoHS compliant.

Please visit www.aosmd.com/media/AOSGreenPolicy.pdf for additional information.

### **Absolute Maximum Ratings**

Exceeding the Absolute Maximum ratings may damage the device.

Parameter	AOZ8222DI-05DI-05				
Peak Pulse Current, t <sub>P</sub> = 8/20 μs	5.5 A				
Peak Pulse Power, t <sub>P</sub> = 8/20 μs	50 W				
Storage Temperature (T <sub>S</sub> )	-65 °C to +150 °C				
ESD Rating per IEC61000-4-2, Contact <sup>(1)</sup>	± 20 kV				
ESD Rating per IEC61000-4-2, Air <sup>(1)</sup>	± 20 kV				
ESD Rating per Human Body Model <sup>(2)</sup>	± 30 kV				

### Notes:

- 1. IEC 61000-4-2 discharge with  $C_{Discharge}$  = 150 pF,  $R_{Discharge}$  = 330  $\Omega$ . 2. Human Body Discharge per MIL-STD-883, Method 3015  $C_{Discharge}$  = 100 pF,  $R_{Discharge}$  = 1.5 k $\Omega$ .

# **Maximum Operating Ratings**

Parameter	Rating
Junction Temperature (T <sub>J</sub> )	-40 °C to +125 °C

www.aosmd.com Page 2 of 7 Rev. 4.0 August 2015



## **Electrical Characteristics**

 $T_A = 25$  °C unless otherwise specified.

Symbol	Parameter	er Conditions		Тур.	Max.	Units
V <sub>RWM</sub>	Reverse Working Voltage	Itage Between I/O and VN <sup>(3)</sup>			5.0	V
V <sub>BR</sub>	Reverse Breakdown Voltage	I <sub>T</sub> = 1 mA, between I/O and VN <sup>(4)</sup>	6.0			V
I <sub>R</sub>	Reverse Leakage Current	V <sub>RWM</sub> = 5 V, between I/O and VN			1	μA
V <sub>F</sub>	Diode Forward Voltage	I <sub>F</sub> = 10 mA	0.6	0.7	0.9	V
V <sub>CL</sub>	Channel Clamp Voltage Positive Transients Negative Transients	$I_{PP} = 1 \text{ A}$ , $tp = 100 \text{ ns}$ , any I/O pin to Ground <sup>(5)(6)</sup>			8.0 -2.0	V V
	Channel Clamp Voltage Positive Transients Negative Transients	$I_{PP} = 5 \text{ A}$ , $tp = 100 \text{ ns}$ , any I/O pin to Ground <sup>(5)(6)</sup>			9.0 -5.0	V V
	Channel Clamp Voltage Positive Transients Negative Transients	$I_{PP} = 12 \text{ A}$ , tp = 100 ns, any I/O pin to Ground <sup>(5)(6)</sup>			10.0 -10.0	V V
СЈ	Channel Input Capacitance	V <sub>R</sub> = 0 V, f = 1 MHz, between I/O pins <sup>(6)</sup>		8	9	pF
		V <sub>R</sub> = 0 V, f = 1 MHz, any I/O pin to Ground <sup>(6)</sup>		15	18	pF


### Notes:


- 3. The working peak reverse voltage, VRWM, should be equal to or greater than the DC or continuous peak operating voltage level.
- 4.  $V_{BR}$  is measured at the pulse test current  $I_{T}$ .
- 5. Measurements performed using a 100ns Transmission Line Pulse (TLP) system.
- 6. Guaranteed by design and characterization.


Rev. 4.0 August 2015 www.aosmd.com Page 3 of 7




# **Typical Performance Characteristics**



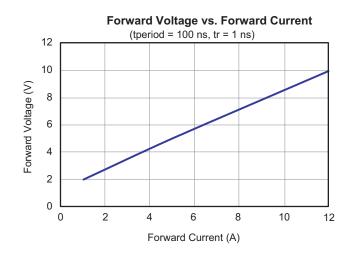




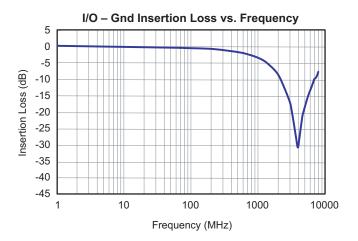


Rev. 4.0 August 2015 www.aosmd.com Page 4 of 7




## Package Dimensions, DFN 1.0 x 0.6





### **RECOMMENDED LAND PATTERN**



### **Dimensions in millimeters**

Symbols	Min.	Nom.	Max.			
Α	0.50	0.52	0.55			
A1	0.00	0.03	0.05			
b1	0.45	0.50	0.55			
b2	0.10	0.15	0.20			
D	0.95	1.00	1.075			
E	0.55	0.60	0.675			
е		0.35				
e1		0.40				
L	0.20	0.25	0.30			
L1						
aaa	0.15					
bbb		0.05				

### **Dimensions in inches**

Symbols	Min.	Nom.	Max.	
Α	0.019	0.020	0.022	
A1	0.000	0.001	0.002	
b	0.018	0.020	0.022	
b2	0.004	0.006	0.008	
D	0.037	0.039	0.042	
E	0.022	0.024	0.027	
е		0.014		
e1		0.016		
L	0.008	0.010	0.012	
L1		0.002		
aaa		0.006		
bbb		0.002		


### Notes:

- 1. All dimensions are in milliteters. Angles are in degrees.
- 2. Coplanarity applies to the exposed heat sink slug as well as the terminals.


Rev. 4.0 August 2015 **www.aosmd.com** Page 5 of 7




# Tape and Reel Dimensions, DFN 1.0 x 0.6

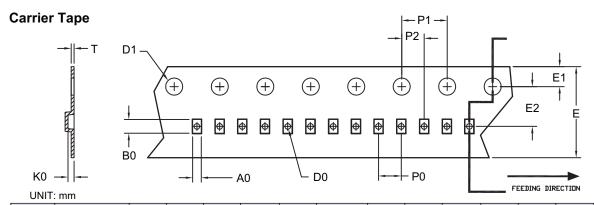

Option	Package	Α0	В0	K0	D0	D1	E	E1	E2	P0	P1	P2	Т
А	DFN 1.0x0.6/ DFN 1.0x0.6A (8 mm)	0.69 ±0.05	1.19 ±0.05	0.66 ±0.05	0.40 ±0.05	1.50 ±0.10	8.00 +0.3/-0.1	1.75 ±0.10	3.50 ±0.05	2.00 ±0.05	4.00 ±0.10	2.00 ±0.05	0.23 ±0.02
В	DFN 1.0x0.6/ DFN 1.0x0.6A (8 mm)	0.65 ±0.04	1.05 ±0.04	0.61 ±0.04	0.40 ±0.05	1.50 ±0.10	8.00 +0.3/-0.1	1.75 ±0.10	3.50 ±0.05	2.00 ±0.10	4.00 ±0.10	2.00 ±0.05	0.20 ±0.05

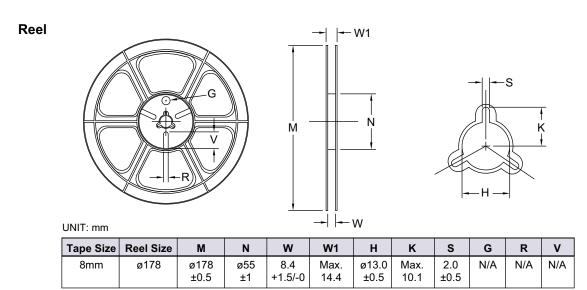


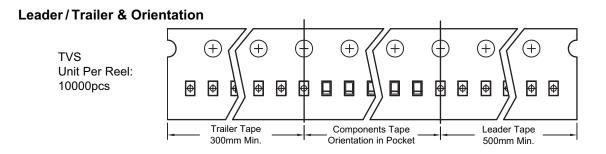

Rev. 4.0 August 2015 **www.aosmd.com** Page 6 of 7



### **Part Marking**



#### **LEGAL DISCLAIMER**

Alpha and Omega Semiconductor makes no representations or warranties with respect to the accuracy or completeness of the information provided herein and takes no liabilities for the consequences of use of such information or any product described herein. Alpha and Omega Semiconductor reserves the right to make changes to such information at any time without further notice. This document does not constitute the grant of any intellectual property rights or representation of non-infringement of any third party's intellectual property rights.

### LIFE SUPPORT POLICY

ALPHA AND OMEGA SEMICONDUCTOR PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS.

As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- 2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Rev. 4.0 August 2015 **www.aosmd.com** Page 7 of 7