

DATA SHEET CL-L104-HC6L1-F5



CITIZEN and CITIZEN are trademarks or registered trademarks of CITIZEN HOLDINGS CO., LTD. JAPAN.


1. Scope of Application


This data sheet is applied to the chip type LED lamp , model CL-L104-HC6L1-F5.

2. Part code

CL- <u>L104</u> - <u>H</u> C <u>6</u> L <u>1</u> -F5
Series L104 : White power LED for general lighting.
Special specifications H : General Color Rendering Index Min.90 type.
Watt class C6 : 6 watt package.
Lighting color L1 : Compliance with ANSI C78.377-2008, 3-Step MacAdam ellipse, Correlated Color Temperature 3000K.

Symbol	CITILED
Name	CL-L104-HC6L1-F5
CITIZEN	ELECTRONICS CO.,LTD. JAPAN



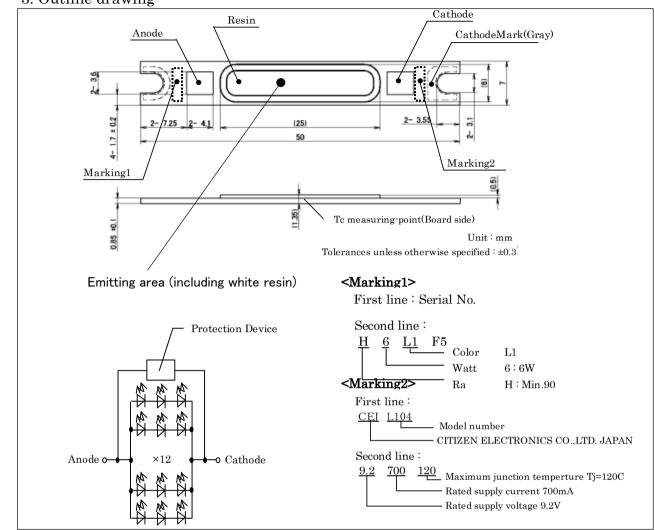

It has a protection device built in as a protection circuit against static electricity.

4. Performance

(1) Absolute Maximum Rating

Parameter	Symbol	Rating Value	Unit	
Power Dissipation	P _D	8.4	W	
Forward Current	$I_{\rm F}$	840	mA	
Mnimum current	I_{FMin}	60	mA	
Reverse Current	I _R	1	mA	
Operating Temperature	T _{OP}	$-30 \sim +85$	С	
Storage Temperature	T _{ST}	-40 ~ +100	С	
Junction Temperature	Tj _{Max}	120	С	*1

*1 D.C. Current : $Tj = Tc + Rj - c \times PD$

Symbol	CITILED
Name	CL-L104-HC6L1-F5
CITIZEN	ELECTRONICS CO.,LTD. JAPAN

(2) Electro-optical Characteristics (Tc=25 C)								
Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit		
Forward Voltage	$V_{\rm F}$	I _F =700mA	8.1	9.2	9.9	V		
Luminous Flux	Φv	IF=700mA	415	520	-	lm		
General Color Rendering Index	Ra	IF=700mA	90	-	-	-		
Thermal Resistance	Rj-c	Junction-case	-	5.0	-	C/W		

Chromaticity coordinates (Condition : $I_{\rm F} \mbox{=} 700 \mbox{mA}$,Tc=25 C)

Color rank	Center				
	х	У			
	0.4338	0.4030			
L1	Oval parameter				
11	а	0.00834			
	b	0.00408			
	θ°	53.17			
*0.1 .	· · · · · · · · ·	1			

Referenc	e (ANSI	C78.377)		_
Color	r rank	х	У	
	Center	0.4338	0.4030	(3045K)
	a	0.4562	0.4260	
L1	b	0.4299	0.4165	
	с	0.4147	0.3814	
	d	0.4373	0.3893	


*Color region stay within MacAdam "3-step" ellipse from the chromaticity center.


*The chromaticity center refers to ANSI C78.377:2008.

Please refer to ANSI C78.377 for the chromaticity center.

 $^{\ast}\theta$ is the angle between the major axis of the ellipse and the x-axis,

and a and b are the major and minor semi-axes of an ellipse. (Ref. IEC 60081:1997 AnnexD)

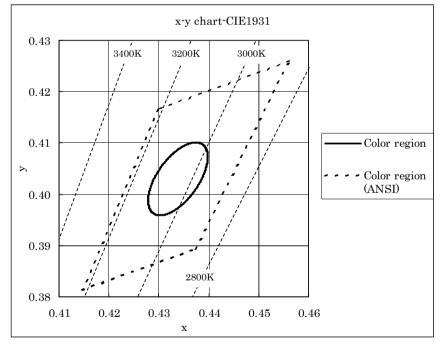





Symbol	CITILED
Name	CL-L104-HC6L1-F5
CITIZEN	ELECTRONICS CO.,LTD. JAPAN

5. Characteristics

Forward Current vs. Forward Voltage




·Forward Current vs. Chromaticity Coordinate




 $\boldsymbol{\cdot}$ Forward Current vs. Relative Luminous Flux

•Case Temperature vs. Chromaticity Coordinate

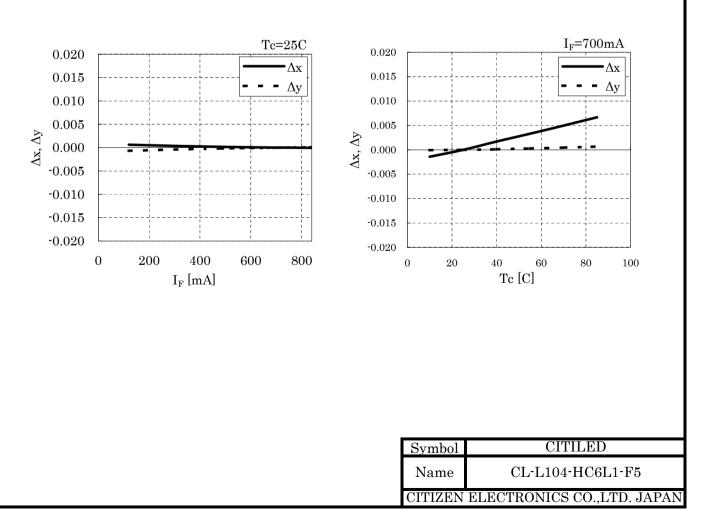



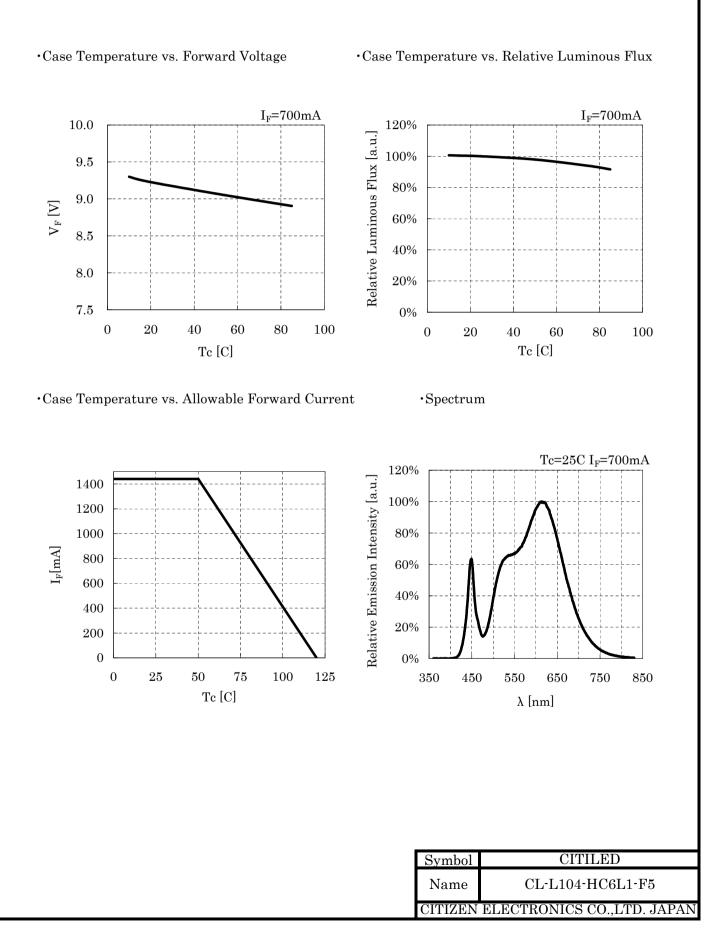

6. Reliability

(1) Details of the tests

Test Item	Test Condition
	Ta=-30 C, I _F =700 mA× 1000 hours(with Al-fin)
Continuous Operation Test	Ta=60 C, I_F =700 mA× 1000 hours(with Al-fin)
	Ta=85 C, I_F =700 mA× 1000 hours(with Al-fin)
Low Temperature Storage Test	-40 C × 1000 hours
High Temperature Storage Test	$100 \text{ C} \times 1000 \text{ hours}$
Moisture-proof Test	60 C, 90 %RH for 1000 hours
Thermal Shock Test	-40 C \times 30 minutes – 100 C \times 30 minutes, 100 cycle

(2) Jud	lgme	nt Ci	riteri	ia o	f Fail	ure	for Re	liał	oility '	Гest				(Ta=25 C)
٦.	•	T.		~	1 1	3.6	•	a	1	т	1	•	c	11 11

Measuring Item	Symbol	Measuring Condition	Judgment Criteria for Failure
Forward Voltage	$V_{\rm F}$	$I_F = 700 \text{mA}$	> U × 1.1
Total Luminous Flux	Φ_{V}	I _F =700mA	$< S \times 0.85$

U defines the upper limit of the specified characteristics. S defines the initial value.

Note: Measurement shall be taken between 2 hours and 24 hours, and the test pieces should be returned to the normal ambient conditions after the completion of each test.

Symbol	CITILED
Name	CL-L104-HC6L1-F5
CITIZEN	ELECTRONICS CO., LTD. JAPAN

7. Packing Specifications


(1) Packing

An empty tray is placed on top of a five-tier tray which contain 50 pieces each. The set of six trays is banded together with two rubber bands. (Smallest packing unit: 250 pieces)

A label with product name, quantity, lot number is placed on the upper empty tray.

Tray (Dimensions: $310 \times 210 \times 11$ mm / Materials: Electrically conductive PS)

< Packing figure >



Product 50pcs/tray

< Example of indication label >

CUSTO	MER			
TYPE P.NO LOT № Q'ty	CL-L104-HC6L1-F5 xxx 132※001 250 pcs.	(1) (2) (3) (4)		
CITIZEN ELECTRONICS				

1. TYPE	CL-L104-HC6L1-F5
2. P.No. (Cutomer's P/N)	e.g. xxx
3. Lot No.	e.g. 132※001
- First letter: Last digit of the year	e.g. 13 : year 2013
- Second letter: Production month	e.g. 2 : Feb
Note: October, November and Decem	iber are designated
by X, Y and Z, respectively.	
- Third letter: Control LOT including	g factory number
	e.g. ※001
4. Quantity	e.g. 250 pieces

Symbol	CITILED
Name	CL-L104-HC6L1-F5
CITIZEN	ELECTRONICS CO.,LTD. JAPAN

8. Precautions

 (1) 1. Handling with care for this product Both the light emitting area and white dam over the Please avoid the resin area from being pressed, stree (e.g. edge of reflector part) because the function, per are negatively impacted. Please be aware that this product should not come in while incorporating in your lighting apparatus or your product should be apparatus or your product should be apparated on the product of the produ	essed, rubbed, come formance and relianto contact with an	e into contact with sharp metal nail ability of this product ny other parts
while incorporating in your lighting apparatus or yo	our other products.	
 (2) Countermeasure against static electricity Handling of this product needs countermeasures ag because this is a semiconductor product. Please take adequate measures to prevent any statis such as the wearing of a wristband or anti-static gl Every manufacturing facility in regard to the product and conveyance unit) should be connected to groun ESD sensitivity of this product is over 1000V (HBM) After assembling the LEDs into your final product(static whether the assembled LEDs are damaged by static) It is easy to find static damaged LED dies by a light 	ic electricity being oves when handlir ict (plant, equipme d and please avoid l, based on JEITA s), it is recommend ic electricity (electr	produced ng this product. ent, machine, carrier machine l the product to be electric-charged. ED-4701/304). led to check rical leak phenomenon) or not.
 (3) Caution of product assembly Regarding this product assembling on the heat sin It might be good for screw tightening on the heat as In addition, please don't press with excess stress of The condition of the product assembling on the heat needs to be optimized according to the specificatio Roughness, unevenness and burr of surface negation between the product and heat sink and increase heat confidence of thermally and mechanical coupling by checking the mounting surface and measuring In order to reduce the thermal resistance at assem TIM (Thermal Interface Material) on whole contact In case of using thermal grease for the TIM, it mig on the contact surface of the product. In case of us it might be good to make sure that the product is I when the screws are tightened for assembly. 	sink to do tempora on the product. at sink and the cor n of the heat sink. wely impact therm eat thermal resists between the product the case temperate ably, it might be go ct surface of the pr ght be good to appli- sing thermal sheet	ary tightening and final tightening. htrol of screw tightening torque hal bonding ance between them. htt and heat sink are confirmed ure of the product. hod to use broduct. ly uniformly for the TIM,
	0 1 1	
	Symbol	CITILED
	Name	CL-L104-HC6L1-F5
		LECTRONICS CO.,LTD. JAPAN

(4) Thermal Design

-The thermal design to draw heat away from the LED junction is most critical parameter for an LED illumination system. High operating temperatures at the LED junction adversely affect the performance of LED's light output and lifetime. Therefore the LED junction temperature should not exceed the absolute maximum rating in LED illumination system.

The LED junction temperature while operation of LED illumination system depends upon thermal resistance of internal LED package (Rj-c), outer thermal resistances of LED package, power loss and ambient temperature. Please take both of the thermal design specifications and ambient temperature conditions into consideration for the setting of driving conditions.
For more information, please refer to application note "Thermal Management".

(5) Driving Current

-A constant current is recommended as an applying driving current to this product.

In the case of constant voltage driving, please connect current-limiting resistor to each products in series and control the driving current to keep under the absolute maximum rating forward current value. Electrical transient might apply excess voltage, excess current and reverse voltage to the product(s). They also affect negative impact on the product(s) therefore please make sure that no excess voltage,

excess current and reverse voltage is applied to the product(s)

when the LED driver is turn-on and/or turn-off.

-For more information, please refer to application note "Driving".

(6) Lighting at a minimum current value

-In a case where the minimum current(IF min) is applied to the product, some of LED dice in the product might look different in their brightness due to the individual difference of the LED dice, and they are not failed.

(7) Electrical Safety

-This product is designed and produced according to IEC 62031:2008

(IEC 62031:2008 LED modules for general lighting. Safety specification)

-Dielectric voltage withstand test has been conducted on this product to see any failure after applying voltage between active pads and aluminum section of the product, and to pass at least 500V.

-Considering conformity assessment for IEC62031:2008, almost all items of the specification depend upon your final product of LED illumination system.

Therefore, please confirm with your final product for electrical safety of your product. As well, the products comply with the criteria of IEC62031:2008 as single LED package.

Symbol	CITILED
Name	CL-L104-HC6L1-F5
CITIZEN I	ELECTRONICS CO.,LTD. JAPAN

8. Precautions (continued)

(8) Recommended soldering Condition (This product is not adaptable to reflow process.) -For manual soldering Please use lead-free soldering. Soldering shall be implemented using a soldering bit at a temperature lower than 350C, and shall be finished within 3.5 seconds for one land. No external force shall be applied to resin part while soldering is implemented. Next process of soldering should be carried out after the product has return to ambient temperature. -For soldering correction Regarding soldering correction, above conditions shall be applied. Contacts number of soldering bit should be within twice for each terminal as a correction. * Citizen Electronics cannot guarantee if usage exceeds these recommended conditions. Please use it after sufficient verification is carried out on your own risk if absolutely necessary. (9) Eve Safety -The International Electrical Commission (IEC) published in 2006 IEC 62471 "2006 Photobiological safety of lamps and lamp systems" which includes LEDs within its scope. -When sorting single LEDs according to IEC 62471, almost all white LEDs can be classified as belonging to either Exempt Group (no hazard) or Risk Group 1 (low risk). However, Optical characteristics of LEDs such as radiant flux, spectrum and light distribution are factors that affect the risk group determination of the LED, and especially a high-power LED, that emits light containing blue wavelengths, might have properties equivalent to those of Risk Group 2 (moderate risk). Great care should be taken when directly viewing an LED that is driven at high current, has multiple uses as a module or when focusing the light with optical instruments, as these actions might greatly increase the hazard to your eyes. -It is recommended to regard the evaluation of stand-alone LED packages as a reference and to evaluate your final product. (10) This product is not designed for usage under the following conditions. If the product might be used under the following conditions, you shall evaluate its effect and appropriate them. In places where the product might: -directly and indirectly get wet due to rain and/or at place with the fear. -be damage by seawater and/or at place with the fear -be exposed to corrosive gas (such as Cl2, H2S, NH3, SOx, NOx and so on) and/or at place with the fear. -be exposed to dust, fluid or oil and/or at place with the fear. CITILED Symbol Name CL-L104-HC6L1-F5 CITIZEN ELECTRONICS CO., LTD. JAPAN

9. Precautions with regard to product use		
(1) This document is provided for reference purposes of products are used as intended. CITIZEN ELECTRO representations with respect to the accuracy or comp in this document nor grants any license to any intell rights of CITIZEN ELECTRONICS or any third par in this document.	ONICS neither ma pleteness of the in lectual property ri	tkes warranties or formation contained ights or any other
(2) All information included in this document such as p is current as of the date this document is issued. Such information, however, is subject to change with Before purchasing or using any CITIZEN ELECTRO please confirm the latest product information with a and formal specifications must be exchanged and signal	hout any prior not ONICS' products l a CITIZEN ELEC'	cice. isted in this document, FRONICS' sales office,
(3) CITIZEN ELECTRONICS has used reasonable car included in this document, but CITIZEN ELECTRONICS assumes no liability a result of errors or omissions in the information inc	whatsoever for an	y damages incurred as
(4) Absent a written signed agreement, except as provisual for product, and to the maximum extent allowat assumes no liability whatsoever, including without or incidental damages or loss, including without lime business interruption and loss of data, and disclaim and conditions related to sale, use of product, or information or conditions of merchantability, fitness for a particutor or no infringement.	ble by law, CITIZ limitation, indire- hitation, loss of pro- s any and all expro- prmation, includin	EN ELECTRONICS ct, consequential, special, ofits, loss of opportunities, ress or implied warranties og warranties
(5) Though CITIZEN ELECTRONICS works continued products can malfunction or fail. Customers are resp and for providing adequate designs and safeguards in which a malfunction or failure of a product could bodily injury or damage to property, including data In addition, customers are also responsible for deter use of any information contained in this document s evaluating by their own but also by the entire syster CITIZEN ELECTRONICS assumes no liability for c	ponsible for compl to minimize risk a cause loss of hum loss or corruption rmining the appro- such as application m.	ying with safety standards and avoid situations an life, priateness of n cases not only with
(6) Please contact CITIZEN ELECTRONICS' sales office the information contained in this document, or if you		
CITIZEN Micro HumanTech is a registered trademark of Citizen H CITILED is a registered trademark of CITIZEN ELECTRONICS C		
	Symbol	CITILED
	Name	CL-L104-HC6L1-F5
	CITIZEN EL	ECTRONICS CO.,LTD. JAPAN