

## DATA SHEET CL-L104-MC6L1-F5



CITIZEN and CITIZEN are trademarks or registered trademarks of CITIZEN HOLDINGS CO., LTD. JAPAN.

Ref.CE-P2383 03/13


1. Scope of Application


This data sheet is applied to the chip type LED lamp , model CL-L104-MC6L1-F5.

 $2. \ Part \ code$ 

CL- <u>L104</u> - <u>MC6L1</u> -F5
Series L104 : White power LED for general lighting.
Special specifications M : General Color Rendering Index Typ.85 type.
Watt class C6 : 6 watt package.
Lighting color L1 : Compliance with ANSI C78.377-2008, 3-Step MacAdam ellipse, Correlated Color Temperature 3000K.

Symbol	CITILED
Name	CL-L104-MC6L1-F5
CITIZEN	ELECTRONICS CO.,LTD. JAPAN



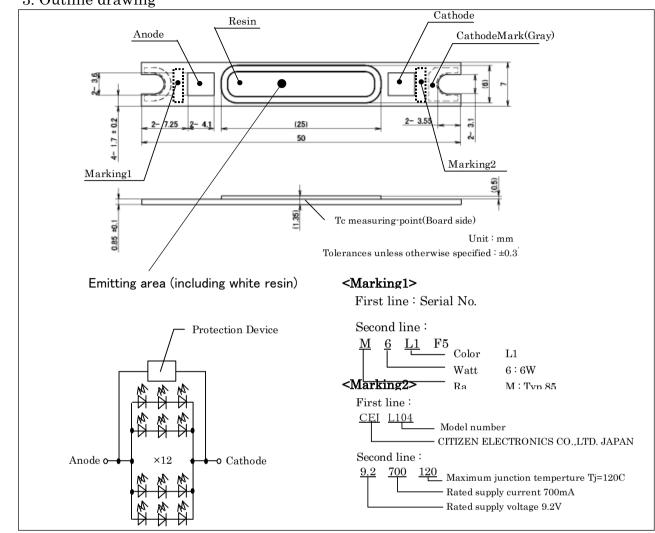

It has a protection device built in as a protection circuit against static electricity.

#### 4. Performance

(1) Absolute Maximum Rating

	<u> </u>			
Parameter	Symbol	Rating Value	Unit	
Power Dissipation	P <sub>D</sub>	8.4	W	
Forward Current	$I_{\rm F}$	840	mA	
Mnimum current	$I_{FMin}$	60	mA	
Reverse Current	I <sub>R</sub>	1	mA	
<b>Operating Temperature</b>	T <sub>OP</sub>	$-30 \sim +85$	С	
Storage Temperature	T <sub>ST</sub>	-40 ~ +100	С	
Junction Temperature	Tj <sub>Max</sub>	120	С	*

\*1 D.C. Current :  $Tj = Tc + Rj - c \times PD$ 

Symbol	CITILED
Name	CL-L104-MC6L1-F5
CITIZEN	ELECTRONICS CO., LTD. JAPAN

(2) Electro-optical Characteristics (Tc=25 C)						
Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	$V_{\rm F}$	I <sub>F</sub> =700mA	8.1	9.2	9.9	V
Luminous Flux	$\Phi v$	IF=700mA	485	610	-	lm
General Color Rendering Index	Ra	IF=700mA	-	85	-	-
Thermal Resistance	Rj-c	Junction-case	-	5.0	-	C/W

Chromaticity coordinates ( Condition :  $I_{\rm F} \mbox{=} 700 \mbox{mA}$  ,Tc=25 C )

Color rank	Center		
	х	У	
	0.4338	0.4030	
L1	Oval parameter		
11	а	0.00834	
	b	0.00408	
	θ°	53.17	
*O1 ' ' '''' M A1 "O ' " 11'			

Referenc	e (ANSI	C78.377)		
Color	r rank	х	У	
	Center	0.4338	0.4030	(3045K)
	a	0.4562	0.4260	
L1	b	0.4299	0.4165	
	с	0.4147	0.3814	
	d	0.4373	0.3893	


\*Color region stay within MacAdam "3-step" ellipse from the chromaticity center.


\*The chromaticity center refers to ANSI C78.377:2008.

Please refer to ANSI C78.377 for the chromaticity center.

 $^{\ast}\theta$  is the angle between the major axis of the ellipse and the x-axis,

and a and b are the major and minor semi-axes of an ellipse. (Ref. IEC 60081:1997 AnnexD)

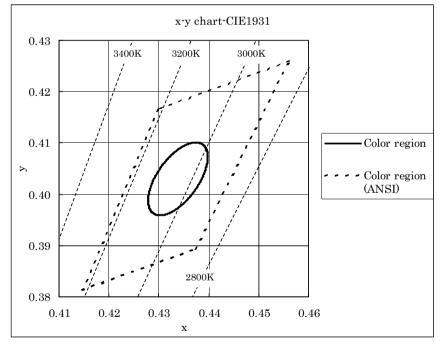





Symbol	CITILED
Name	CL-L104-MC6L1-F5
CITIZEN	ELECTRONICS CO.,LTD. JAPAN

## 5. Characteristics


Forward Current vs. Forward Voltage

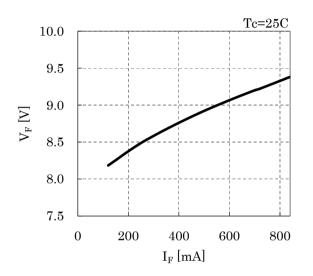


·Forward Current vs. Chromaticity Coordinate

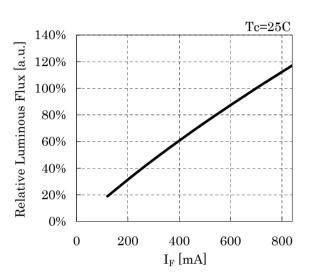


 $\boldsymbol{\cdot}$  Forward Current vs. Relative Luminous Flux



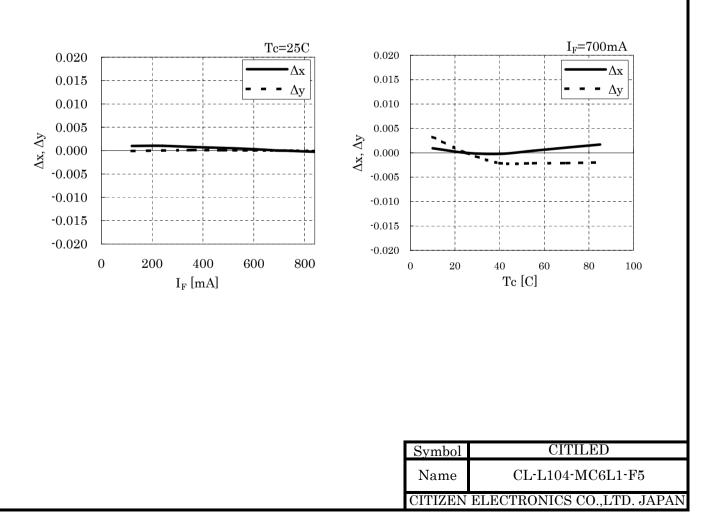



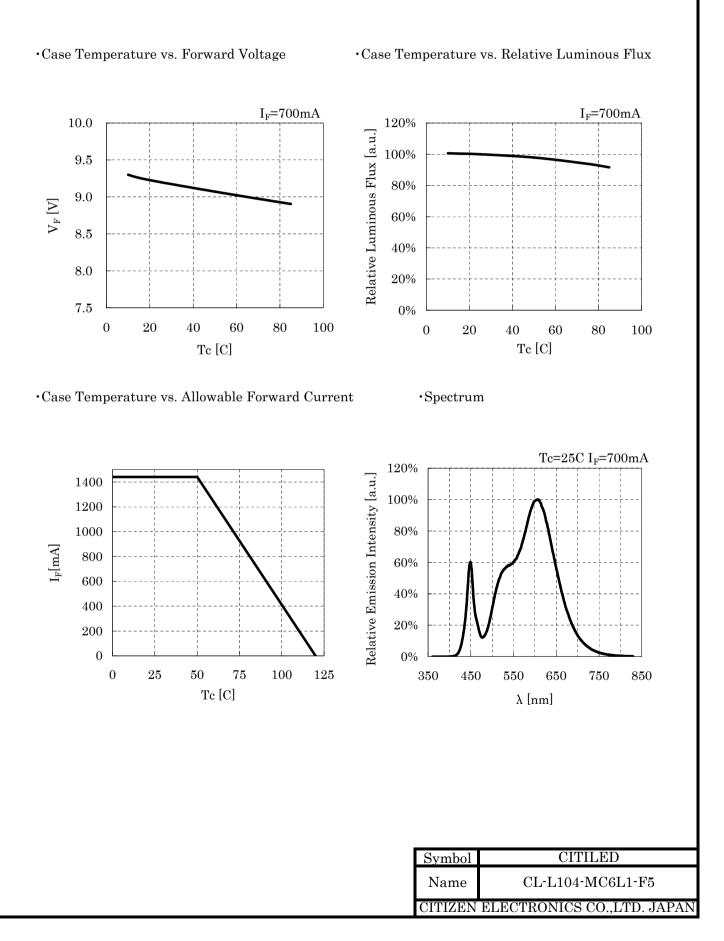

## 6. Reliability

### (1) Details of the tests

Test Item	Test Condition
	Ta=-30 C, I <sub>F</sub> =700 mA× 1000 hours(with Al-fin)
Continuous Operation Test	Ta=60 C, $I_F$ =700 mA× 1000 hours(with Al-fin)
	Ta=85 C, $I_F$ =700 mA× 1000 hours(with Al-fin)
Low Temperature Storage Test	-40 C × 1000 hours
High Temperature Storage Test	$100 \text{ C} \times 1000 \text{ hours}$
Moisture-proof Test	60 C, 90 %RH for 1000 hours
Thermal Shock Test	-40 C $\times$ 30 minutes – 100 C $\times$ 30 minutes, 100 cycle

(2) Judgment Criter	ia of Failure for Reliability Test	(Ta=25 C)
M · T		

Measuring Item	Symbol	Measuring Condition	Judgment Criteria for Failure
Forward Voltage	$V_{\rm F}$	I <sub>F</sub> =700mA	> U × 1.1
Total Luminous Flux	$\Phi_{V}$	I <sub>F</sub> =700mA	$< S \times 0.85$

U defines the upper limit of the specified characteristics. S defines the initial value.

Note: Measurement shall be taken between 2 hours and 24 hours, and the test pieces should be returned to the normal ambient conditions after the completion of each test.

_		
	Symbol	CITILED
	Name	CL-L104-MC6L1-F5
	CITIZEN	ELECTRONICS CO., LTD. JAPAN

7. Packing Specifications


### (1) Packing

An empty tray is placed on top of a five-tier tray which contain 50 pieces each. The set of six trays is banded together with two rubber bands. (Smallest packing unit: 250 pieces)

A label with product name, quantity, lot number is placed on the upper empty tray.

Tray (Dimensions:  $310 \times 210 \times 11$ mm / Materials: Electrically conductive PS)

< Packing figure >

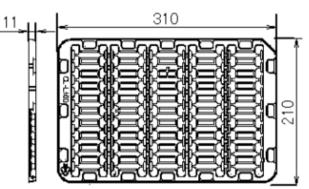

Product 50pcs/tray

< Example of indication label >

CUSTOMER				
TYPE P.NO LOT No Q'ty	CL-L104-MC6L1-F5 xxx 132※001 250 pcs.	(1) (2) (3) (4)		
CITIZEN ELECTRONICS				

1. TYPE	CL-L104-MC6L1-F5
2. P.No. (Cutomer's P/N)	e.g. xxx
3. Lot No.	e.g. 132×001
- First letter: Last digit of the year	e.g. 13 : year 2013
- Second letter: Production month	e.g. 2 : Feb
Note: October, November and Decem	ber are designated
by X, Y and Z, respectively.	
- Third letter: Control LOT including	; factory number
	e.g. ※001
4. Quantity	e.g. 250 pieces

Symbol	CITILED
Name	CL-L104-MC6L1-F5
CITIZEN ELECTRONICS CO., LTD. JAPAN	

### 8. Precautions

<ul> <li>(1) 1. Handling with care for this product</li> <li>Both the light emitting area and white dam over the Please avoid the resin area from being pressed, stress (e.g. edge of reflector part) because the function, perfare negatively impacted.</li> <li>Please be aware that this product should not come in</li> </ul>	sed, rubbed, com formance and reli	e into contact with sharp metal nail ability of this product
while incorporating in your lighting apparatus or you		
<ul> <li>(2) Countermeasure against static electricity</li> <li>Handling of this product needs countermeasures aga because this is a semiconductor product.</li> <li>Please take adequate measures to prevent any static such as the wearing of a wristband or anti-static glo</li> <li>Every manufacturing facility in regard to the product and conveyance unit) should be connected to ground</li> <li>ESD sensitivity of this product is over 1000V (HBM,</li> <li>After assembling the LEDs into your final product(s) whether the assembled LEDs are damaged by static</li> <li>It is easy to find static damaged LED dies by a light</li> </ul>	c electricity being ves when handlin t (plant, equipme l and please avoid based on JEITA ), it is recommend e electricity (electricity	produced ng this product. ent, machine, carrier machine I the product to be electric-charged. ED-4701/304). led to check rical leak phenomenon) or not.
<ul> <li>(3) Caution of product assembly</li> <li>Regarding this product assembling on the heat sink It might be good for screw tightening on the heat sink addition, please don't press with excess stress on</li> <li>The condition of the product assembling on the heat needs to be optimized according to the specification</li> <li>Roughness, unevenness and burr of surface negative between the product and heat sink and increase head confidence of thermally and mechanical coupling to by checking the mounting surface and measuring the specification. In order to reduce the thermal resistance at assemb TIM (Thermal Interface Material) on whole contact In case of using thermal grease for the TIM, it might be good to make sure that the product is N when the screws are tightened for assembly.</li> </ul>	ink to do tempora in the product. t sink and the cor of the heat sink. vely impact therm eat thermal resist between the produ- he case temperat oly, it might be go t surface of the pr ht be good to appling thermal sheet	ary tightening and final tightening. http://opensional.com/ all bonding ance between them. act and heat sink are confirmed ure of the product. bod to use roduct. ly uniformly for the TIM,
	Group al	OWNE ED
	Symbol Name	CITILED CL-L104-MC6L1-F5
		LECTRONICS CO.,LTD. JAPAN
		LIGINON OU., LID. OALAN

#### (4) Thermal Design

-The thermal design to draw heat away from the LED junction is most critical parameter for an LED illumination system. High operating temperatures at the LED junction adversely affect the performance of LED's light output and lifetime. Therefore the LED junction temperature should not exceed the absolute maximum rating in LED illumination system.

The LED junction temperature while operation of LED illumination system depends upon thermal resistance of internal LED package (Rj-c), outer thermal resistances of LED package, power loss and ambient temperature. Please take both of the thermal design specifications and ambient temperature conditions into consideration for the setting of driving conditions.
For more information, please refer to application note "Thermal Management".

#### (5) Driving Current

-A constant current is recommended as an applying driving current to this product.

In the case of constant voltage driving, please connect current-limiting resistor to each products in series and control the driving current to keep under the absolute maximum rating forward current value. Electrical transient might apply excess voltage, excess current and reverse voltage to the product(s). They also affect negative impact on the product(s) therefore please make sure that no excess voltage,

excess current and reverse voltage is applied to the product(s)

when the LED driver is turn-on and/or turn-off.

-For more information, please refer to application note "Driving".

#### (6) Lighting at a minimum current value

-In a case where the minimum current(IF min) is applied to the product, some of LED dice in the product might look different in their brightness due to the individual difference of the LED dice, and they are not failed.

#### (7) Electrical Safety

-This product is designed and produced according to IEC 62031:2008

(IEC 62031:2008 LED modules for general lighting. Safety specification)

-Dielectric voltage withstand test has been conducted on this product to see any failure after applying voltage between active pads and aluminum section of the product, and to pass at least 500V.

-Considering conformity assessment for IEC62031:2008, almost all items of the specification depend upon your final product of LED illumination system.

Therefore, please confirm with your final product for electrical safety of your product. As well, the products comply with the criteria of IEC62031:2008 as single LED package.

Symbol	CITILED
Name	CL-L104-MC6L1-F5
CITIZEN ELECTRONICS CO., LTD. JAPAN	

#### 8. Precautions (continued)

(8) Recommended soldering Condition (This product is not adaptable to reflow process.) -For manual soldering Please use lead-free soldering. Soldering shall be implemented using a soldering bit at a temperature lower than 350C, and shall be finished within 3.5 seconds for one land. No external force shall be applied to resin part while soldering is implemented. Next process of soldering should be carried out after the product has return to ambient temperature. -For soldering correction Regarding soldering correction, above conditions shall be applied. Contacts number of soldering bit should be within twice for each terminal as a correction. \* Citizen Electronics cannot guarantee if usage exceeds these recommended conditions. Please use it after sufficient verification is carried out on your own risk if absolutely necessary. (9) Eve Safety -The International Electrical Commission (IEC) published in 2006 IEC 62471 "2006 Photobiological safety of lamps and lamp systems" which includes LEDs within its scope. -When sorting single LEDs according to IEC 62471, almost all white LEDs can be classified as belonging to either Exempt Group (no hazard) or Risk Group 1 (low risk). However, Optical characteristics of LEDs such as radiant flux, spectrum and light distribution are factors that affect the risk group determination of the LED, and especially a high-power LED, that emits light containing blue wavelengths, might have properties equivalent to those of Risk Group 2 (moderate risk). Great care should be taken when directly viewing an LED that is driven at high current, has multiple uses as a module or when focusing the light with optical instruments, as these actions might greatly increase the hazard to your eyes. -It is recommended to regard the evaluation of stand-alone LED packages as a reference and to evaluate your final product. (10) This product is not designed for usage under the following conditions. If the product might be used under the following conditions, you shall evaluate its effect and appropriate them. In places where the product might: -directly and indirectly get wet due to rain and/or at place with the fear. -be damage by seawater and/or at place with the fear -be exposed to corrosive gas (such as Cl2, H2S, NH3, SOx, NOx and so on) and/or at place with the fear. -be exposed to dust, fluid or oil and/or at place with the fear. CITILED Symbol Name CL-L104-MC6L1-F5 CITIZEN ELECTRONICS CO., LTD. JAPAN

<ul> <li>(1) This document is provided for reference purposes only so that CITIZEN ELECTRONICS products are used as intended. CITIZEN ELECTRONICS or ther makes warranties or representations with respect to the accuracy or completeness of the information contained in this document nor grants any laconse to any third party with respect to the information in this document.</li> <li>(2) All information included in this document such as product data, diagrams, charts, is current as of the date this document is issued. Such information, mover, is subject to change without any prior notice. Before purchasing or using any CITIZEN ELECTRONICS' products listed in this document, please confirm the latest product information with a CITIZEN ELECTRONICS' sales office, and formal specifications must be exchanged and signed by both partics prior to mass production.</li> <li>(3) CITIZEN ELECTRONICS has used reasonable care in compiling the information included in this document, but CITIZEN ELECTRONICS assumes no liability whatsoever for any damages incurred as a result of errors or omissions in the information included in this document.</li> <li>(4) Absent a written signed agreement, except as provided in the relevant torms and conditions of sale for product, and to the maximum extent allovable by law, CITIZEN ELECTRONICS assumes no liability whatsoever, including without limitation, indirect, consequential, special, or incidental damages or loss, including without limitation, andirect, so as opportunities, business interruption and loss of data, and disclams any and all express or implied warranties and conditions of malfunction or failure and disedures for a particular purpose, accuracy of information, or no infringement.</li> <li>(5) Though CITIZEN ELECTRONICS works continually to improve products' quality and reliability, products can malfunction or failure of a product could cause loss of human life, budiyiny or damage to property, including data loss or orarpin. In addition, customers are also responsi</li></ul>	9. Precautions with regard to product use	
<ul> <li>is current as of the date this document is issued.</li> <li>Such information, however, is subject to change without any prior notice.</li> <li>Before purchasing or using any CITIZEN ELECTRONICS' products listed in this document, please confirm the latest product information with a CITIZEN ELECTRONICS' sales office, and formal specifications must be exchanged and signed by both parties prior to mass production.</li> <li>(a) CITIZEN ELECTRONICS has used reasonable care in compiling the information included in this document.</li> <li>but CITIZEN ELECTRONICS assumes no liability whatsoever for any damages incurred as a result of errors or omissions in the information included in this document.</li> <li>(b) Absent a written signed agreement, except as provided in the relevant terms and conditions of sale for product, and to the maximum extent allowable by law, CITIZEN ELECTRONICS assumes no liability whatsoever, including without limitation, indirect, consequential, special, or incidental damages or loss, including without limitation, including warranties and conditions related to sale, use of product, or information, including warranties or conditions of merchantability, fitness for a particular purpose, accuracy of information, or no infringement.</li> <li>(f) Though CITIZEN ELECTRONICS works continually to improve products' quality and reliability, products can malfunction or fail. Customers are responsible for complying with asfety standards and the providing adequate designs and safeguards to minimize risk and avoid situations in which a malfunction or fail. Customers are responsible for complying with asfety standards and the providing adequate designs and safeguards to minimize risk and avoid situations.</li> <li>In addition, customers are also responsible for determining the appropriateness of use of any information contained in this document such as application cases not only with evaluating by their own but also by the entire system.</li> <li>CITIZEN ELECTRONICS</li></ul>	products are used as intended. CITIZEN ELECTRONICS no representations with respect to the accuracy or completeness in this document nor grants any license to any intellectual pr rights of CITIZEN ELECTRONICS or any third party with r	either makes warranties or s of the information contained roperty rights or any other
Such information, however, is subject to change without any prior notice.       Before purchasing or using any CITIZEN ELECTRONICS' products listed in this document, please confirm the latest product information with a CITIZEN ELECTRONICS' sales office, and formal specifications must be exchanged and signed by both parties prior to mass production.         (9) CITIZEN ELECTRONICS has used reasonable care in compiling the information included in this document.       The information included in this document.         (4) Absent a written signed agreement, except as provided in the relevant terms and conditions of sale for product, and to the maximum extent allowable by law, CITIZEN ELECTRONICS assumes no liability whatsoever, including without limitation, indirect, consequential, special, or incidental damages or loss, including without limitation, loss of profits, loss of opportunities, business interruption and loss of data, and disclaims any and all express or implied warranties and conditions of merchantability, fitness for a particular purpose, accuracy of information, or no infringement.         (5) Though CITIZEN ELECTRONICS works continually to improve products 'quality and reliability, products can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safegurads to minimize risk and avoid situations in which a malfunction or fail customers are responsible for complying with safety standards and solity or work as also responsible for determining the appropriateness of use of any information contained in this document such as application cases not only with evaluing by their own but also by the entire system.         (6) Please contact CITIZEN ELECTRONICS' sales office if you have any questions regarding the information contained in this document, or if you have any other inquiries.		lata, diagrams, charts,
Before purchasing or using any CITIZEN ELECTRONICS' products listed in this document, please confirm the latest product information with a CITIZEN ELECTRONICS' sales office, and formal specifications must be exchanged and signed by both parties prior to mass production.         (a) CITIZEN ELECTRONICS has used reasonable care in compiling the information included in this document.       but CITIZEN ELECTRONICS assumes no liability whatsoever for any damages incurred as a result of errors or omissions in the information included in this document.         (4) Absent a written signed agreement, except as provided in the relevant terms and conditions of sale for product, and to the maximum extent allowable by law, CITIZEN ELECTRONICS assumes no liability whatsoever, including without limitation, loss of profits, loss of opportunities, business interruption and loss of data, and disclaims any and all express or implied warranties ard conditions related to sale, use of product, or information, including with advid situations, or no infringement.         (5) Though CITIZEN ELECTRONICS works continually to improve products' quality and reliability, products can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and asfegurates to minimize risk and avid situations in which a malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and asfegurates to minimize risk and avid situations.         (b) Though CITIZEN ELECTRONICS works continually to furgorize cases not only with evaluation, used may approach as a splication cases not only with evaluation.         (5) Though CITIZEN ELECTRONICS works continually to improve products' quality and reliability, products can malfunction or fail. Customers and so corruption.		prior notice.
and formal specifications must be exchanged and signed by both parties prior to mass production.         (3) CITIZEN ELECTRONICS has used reasonable care in compiling the information included in this document, but CITIZEN ELECTRONICS assumes no liability whatsoever for any damages incurred as a result of errors or omissions in the information included in this document.         (4) Absent a written signed agreement, except as provided in the relevant terms and conditions of sale for product, and to the maximum extent allowable by law, CITIZEN ELECTRONICS assumes no liability whatsoever, including without limitation, indirect, consequential, special, or incidental damages or loss, including without limitation, loss of profits, loss of opportunities, business interruption and loss of data, and disclaims any and all express or implied warranties and conditions related to sale, use of product, or information, including warranties or conditions of merchantability, fitness for a particular purpose, accuracy of information, or no infringement.         (5) Though CITIZEN ELECTRONICS works continually to improve products' quality and reliability, products can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards to minimize risk and avoid situations in which a mafunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs end safeguards to minimize risk and avoid situations.         (bid) injury or damage to property, including data loss or corruption.       In addition, customers are also responsible for determining the appropriateness of use of any information contained in this document such as application cases not only with evaluating by their own but also by the entire system.         CITIZEN ELECTRONICS asumes no liab	Before purchasing or using any CITIZEN ELECTRONICS' p	products listed in this document,
<ul> <li>(9) CITIZEN ELECTRONICS has used reasonable care in compiling the information included in this document, but CITIZEN ELECTRONICS assumes no liability whatsoever for any damages incurred as a result of errors or omissions in the information included in this document.</li> <li>(4) Absent a written signed agreement, except as provided in the relevant terms and conditions of sale for product, and to the maximum extent allowable by law, CITIZEN ELECTRONICS assumes no liability whatsoever, including without limitation, indired, consequential, special, or incidental damages or loss, including without limitation, including warranties and conditions related to sale, use of product, or information, including warranties or conditions of merchantability, fitness for a particular purpose, accuracy of information, or no infringement.</li> <li>(5) Though CITIZEN ELECTRONICS works continually to improve products' quality and reliability, products can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards to minimize risk and avoid situations in which a malfunction or failure of a product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. In addition, customers are also responsible for determining the appropriateness of use of any information contained in this document such as application cases not only with evaluating by their own but also by the entire system.</li> <li>CITIZEN ELECTRONICS assumes no liability for customers' product design or applications.</li> <li>CITIZEN HELECTRONICS assumes no liability for customers' product design or applications.</li> <li>CITIZEN HELECTRONICS as registered trademark of Citizen Holding Co., Japan</li> <li>CITIZEN HELECTRONICS is a registered trademark of Citizen Holding Co., Japan</li> <li>CITIZEN Hero HumanTech is a registered trademark of Citizen Holding Co., Japan</li> <li>CITIZEN is a registered trademark of CITIZEN ELECTRONICS CO., LTD. Japan<td></td><td></td></li></ul>		
<ul> <li>included in this document, but CITIZEN ELECTRONICS assumes no liability whatsoever for any damages incurred as a result of errors or omissions in the information included in this document.</li> <li>(4) Absent a written signed agreement, except as provided in the relevant terms and conditions of sale for product, and to the maximum extent allowable by law, CITIZEN ELECTRONICS assumes no liability whatsoever, including without limitation, loss of profits, loss of opportunities, business interruption and loss of data, and disclaims any and all express or implied warranties and conditions related to sale, use of product, or information, including warranties or conditions of merchantability, fitness for a particular purpose, accuracy of information, or no infringement.</li> <li>(5) Though CITIZEN ELECTRONICS works continually to improve products' quality and reliability, products can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards to minimize risk and avoid situations in which a malfunction or failure of a product ould cause loss of human life, bodily injury or damage to property, including data loss or corruption. In addition, customers are also responsible for determining the appropriateness of use of any information contained in this document such as application cases not only with evaluating by their own but also by the entire system. CITIZEN ELECTRONICS assumes no liability for customers' product design or applications.</li> <li>CH2EN Micro HumanTech is a registered trademark of Citizen Holding Co., Japan</li> <li>CITILED is a registered trademark of CITIZEN ELECTRONICS CO., LTD. Japan</li> <li><u>Symbol CITILED</u></li> </ul>		
but CITIZEN ELECTRONICS assumes no liability whatsoever for any damages incurred as a result of errors or omissions in the information included in this document.         (4) Absent a written signed agreement, except as provided in the relevant terms and conditions of sale for product, and to the maximum extent allowable by law, CITIZEN ELECTRONICS assumes no liability whatsoever, including without limitation, loss of profits, loss of opportunities, business interruption and loss of data, and disclaims any and all express or implied warranties and conditions related to sale, use of product, or information, including warranties or conditions related to sale, use of product, or information, including with and reliability, products can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards to minimize risk and avoid situations in which a malfunction or failure of a product could cause loss of human life, bodly injury or damage to property, including data loss or corruption.         In addition, customers are also responsible for determining the appropriateness of use of any information contained in this document such as application cases not only with evaluating by their own but also by the entire system.         CITIZEN ELECTRONICS assumes no liability for customers' product design or applications.         CITIZEN ELECTRONICS assumes no liability for ustomers' product design and product information endined in this document.         (d) Please contact CITIZEN ELECTRONICS' sales office if you have any questions regarding the information contained in this document, or if you have any other inquiries.         CITIZEN ELECTRONICS is a registered trademark of CITIZEN ELECTRONICS CO., LTD. Japan		piling the information
<ul> <li>(4) Absent a written signed agreement, except as provided in the relevant terms and conditions of sale for product, and to the maximum extent allowable by law, CITIZEN ELECTRONICS assumes no liability whatsoever, including without limitation, loss of profits, loss of opportunities, business interruption and loss of data, and disclaims any and all express or implied warranties and conditions of merchantability, fitness for a particular purpose, accuracy of information, or no infringement.</li> <li>(5) Though CITIZEN ELECTRONICS works continually to improve products' quality and reliability, products can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguads to minimize risk and avoid situations in which a malfunction or failure of a product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. In addition, customers are also responsible for determining the appropriateness of use of any information contained in this document such as application cases not only with evaluating by their own but also by the entire system. CITIZEN ELECTRONICS assumes no liability for customers' product design or applications.</li> <li>(6) Please contact CITIZEN ELECTRONICS' sales office if you have any questions regarding the information contained in this document, or if you have any other inquiries.</li> <li>CITIZEN Micro HumanTech is a registered trademark of CITIZEN FOLCENCISC CO., LTD. Japan</li> <li> <u>Symbol</u> <u>CITILED</u> </li> </ul>	but CITIZEN ELECTRONICS assumes no liability whatsoev	
sale for product, and to the maximum extent allowable by law, CITIZEN ELECTRONICS assumes no liability whatsoever, including without limitation, indirect, consequential, special, or incidental damages or loss, including without limitation, loss of profits, loss of opportunities, business interruption and loss of data, and disclaims any and all express or implied warranties or conditions of merchantability, fitness for a particular purpose, accuracy of information, or no infringement. (5) Though CITIZEN ELECTRONICS works continually to improve products' quality and reliability, products can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards to minimize risk and avoid situations in which a malfunction or failure of a product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. In addition, customers are also responsible for determining the appropriateness of use of any information contained in this document such as application cases not only with evaluating by their own but also by the entire system. CITIZEN ELECTRONICS assumes no liability for customers' product design or applications. (6) Please contact CITIZEN ELECTRONICS' sales office if you have any questions regarding the information contained in this document, or if you have any other inquiries. CITIZEN Micro HumanTech is a registered trademark of Citizen Holding Co., Japan. CITILED is a registered trademark of CITIZEN ELECTRONICS CO., LTD. Japan	a result of errors or omissions in the information included in	this document.
products can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards to minimize risk and avoid situations in which a malfunction or failure of a product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. In addition, customers are also responsible for determining the appropriateness of use of any information contained in this document such as application cases not only with evaluating by their own but also by the entire system.         CITIZEN ELECTRONICS assumes no liability for customers' product design or applications.         (6) Please contact CITIZEN ELECTRONICS' sales office if you have any questions regarding the information contained in this document, or if you have any other inquiries.         CITIZEN Micro HumanTech is a registered trademark of Citizen Holding Co., Japan.         CITILED is a registered trademark of CITIZEN ELECTRONICS CO., LTD. Japan         Symbol       CITILED         Name       CL-L104-MC6L1-F5	sale for product, and to the maximum extent allowable by lav assumes no liability whatsoever, including without limitation or incidental damages or loss, including without limitation, I business interruption and loss of data, and disclaims any and and conditions related to sale, use of product, or information or conditions of merchantability, fitness for a particular purp	w, CITIZEN ELECTRONICS on, indirect, consequential, special, loss of profits, loss of opportunities, d all express or implied warranties , including warranties
the information contained in this document, or if you have any other inquiries. CITIZEN Micro HumanTech is a registered trademark of Citizen Holding Co., Japan. CITILED is a registered trademark of CITIZEN ELECTRONICS CO., LTD. Japan	products can malfunction or fail. Customers are responsible and for providing adequate designs and safeguards to minim in which a malfunction or failure of a product could cause los bodily injury or damage to property, including data loss or co In addition, customers are also responsible for determining t use of any information contained in this document such as ap evaluating by their own but also by the entire system.	for complying with safety standards hize risk and avoid situations as of human life, prruption. the appropriateness of pplication cases not only with
CITILED is a registered trademark of CITIZEN ELECTRONICS CO., LTD. Japan           Symbol         CITILED           Name         CL-L104-MC6L1-F5	· · · · · ·	
Name CL-L104-MC6L1-F5		-
Name CL-L104-MC6L1-F5		
Name CL-L104-MC6L1-F5		
Name CL-L104-MC6L1-F5	Svn	nbol CITILED