


# Digital Megohmmeter

**1000V digital tester**  
With automatic 3 minute test

## Features:

- Three test voltages of 250V, 500V and 1000V
- Insulation Resistance to 2000M $\Omega$
- Safety Power Lock enables "hands free" operation for 3 minute test
- Automatic discharge when safety "Press to Test" button is released
- Auto power off and Data Hold
- Large 0.65" (17mm) LCD display
- Full function indication
- Overload protection
- Automatic zero adjustment
- Fast response for both continuity and low resistance testing
- Continuity measurements to 200 $\Omega$  and Voltage to 600VAC
- Optional 380399 Resistance Checker to check the performance of your Megohmmeter
- Complete with 6 x AA batteries, heavy duty 2.5ft (0.8m) test leads, alligator clip, large probe, and case with neckstrap

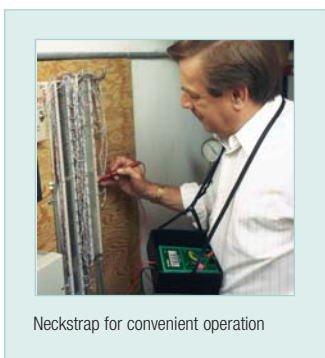

Neckstrap for convenient operation

Specifications	Range	Basic Accuracy
Insulation Voltage	250V, 500V, 1000V	
Insulation resistance(basic accuracy)	2/20/200M $\Omega$	<1000M $\Omega$ (3%rdg+5d), >1000M $\Omega$ (5%rdg+5d)
AC Voltage (accuracy)	600V	(0.8%rdg+3d)
Low Resistance	200 $\Omega$	(1%rdg)
Output short circuit current	1.5 mA 0.3-0.5 mA	
Ohmmeter (accuracy)	20/200 $\Omega$ (auto)	(1%rdg+2d)
Overload Protection	2200V (<1 min)	
Continuity Beeper	<100 $\Omega$	
Dimensions	3.8 x 6.3 x 2.3" (97 x 160 x 58mm)	
Weight	13oz (369g)	

## Ordering Information:

**380360**.....Digital Megohmmeter  
**380360-NIST** .....380360 with NIST Certificate  
**380968**.....Test Leads for 380360

