

PRODUCT NO.	ITEM	PART NAME	Q'TY	MATERIAL	PLATING
114B-52B00-R02	1	BODY	1	LCP	
	3	CONTACT	124	PHOSPHOR BRONZE	GOLD 3u"
	4	LATCH	2	STAINLESS	

Plastic Body : LCP, Color Black.
 Contact: Phosphor Bronze Alloy (C5191R-H)
 Contact area: Gold 3 micro inches
 Solder area: Matte Tin Plated
 All under-plated Ductile Nickel 50 micro inches (Min.)
 Latch : SUS304R-1/2H, Matte Tin Plated
 Contact Resistance: 30 mΩ (Max)
 Insulation Resistance: 500 MΩ (Max.)
 Dielectric Withstanding Voltage:
 Mate connectors; apply 250V AC at 60 Hz(rms.)
 Contact Normal Force: 50 gf per pin (Min.)
 soldering heat: 260°C
 Rating Voltage: 25V AC
 Rating Current: 0.3A(Max.)/(1PIN)
 Operating Temperature: -40°C to +90°C
 Storage Temperature: -40°C to +90°C

114B-52 B 0 0-R02
 1 2 3 4

- 1. Stand off
s/o: 5.2mm
- 2. Contact Plating
B: 3u" Gold Plating
- 3. Color
0: Black
- 4. RoHS


UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±5
0.	±0.3
.0	±0.25
.00	±0.20
SCALE:	AS SHOWN
UNIT:	mm
DRAWN	Willis
DATE	2009/09/28
CHECKED	Angel
DATE	2009/09/28
APPROVED	Ken
DATE	2009/07/06

Attend
 ATTEND TECHNOLOGY INC.
 www.attend.com.tw

DRAWN NAME: Mini PCI Socket
 stand off 5.2mm, Metal grounding type

PRODUCT NO. 114B-52B00-R02
 FILE NAME: 114B-52B00-R02_B_3

REV.	DESCRIPTION	DATE
1	Revise: Latch Matte Tin Plated	2009/09/28
2	Revise: Layout Peg	2009/07/06

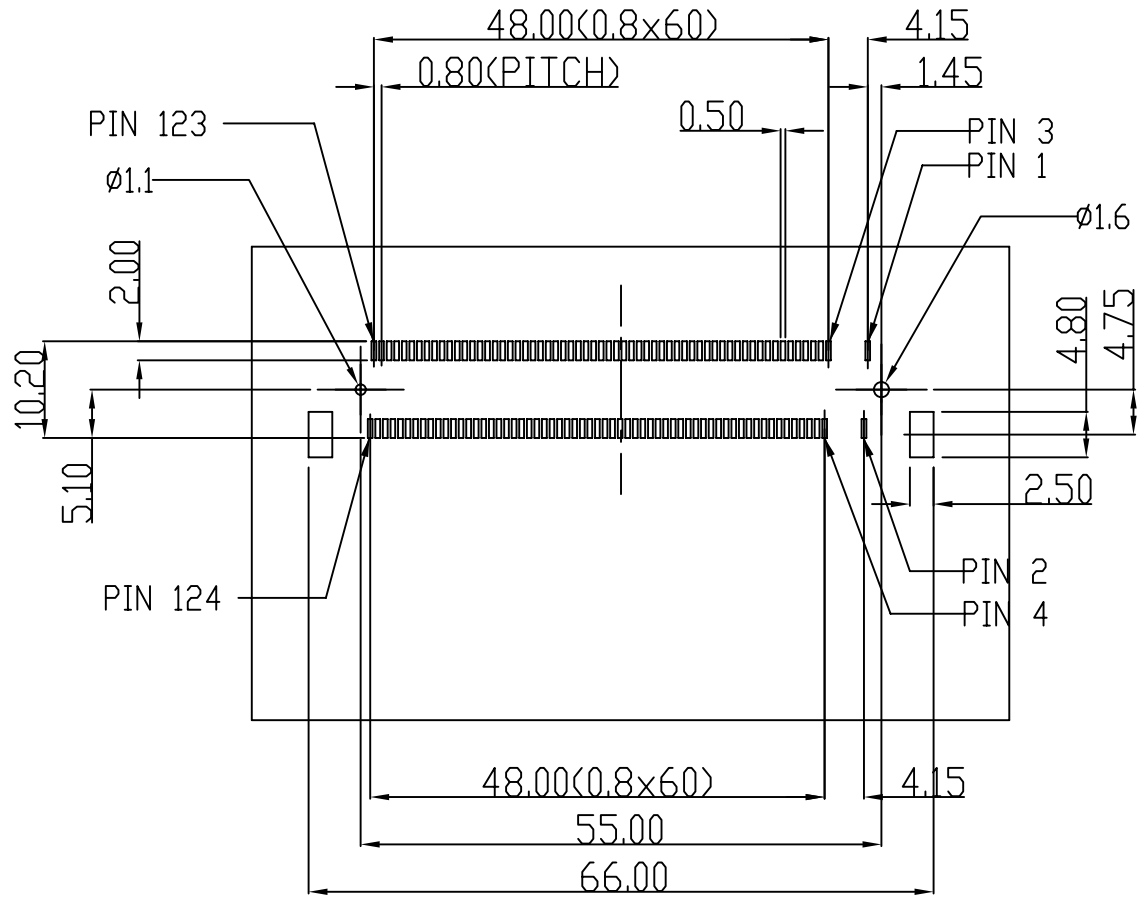

RECOMMEND PC BOARD LAYOUT

UNLESS OTHERWISE SPECIFIED TOLERANCE

ANG.	±5°
0.	±0.3
.0	±0.25
.00	±0.20

SCALE: AS SHOWN UNIT: mm

DRAWN Willis 2009/09/28

CHECKED Angel 2009/09/28

APPROVED Ken 2009/09/28

DATE DATE SIZE A4 REV.



ATTEND TECHNOLOGY INC.

www.attend.com.tw


DRAWN NAME: Mini PCI Socket

stand off 5.2mm, Metal grounding type

PRODUCT NO. 114B-52B00-R02

FILE NAME: 114B-52B00-R02_B_3

REV.	DESCRIPTION	DATE
1	Revise: Latch Matte Tin Plated	2009/09/28
2	Revise: Layout Peg	2009/07/06

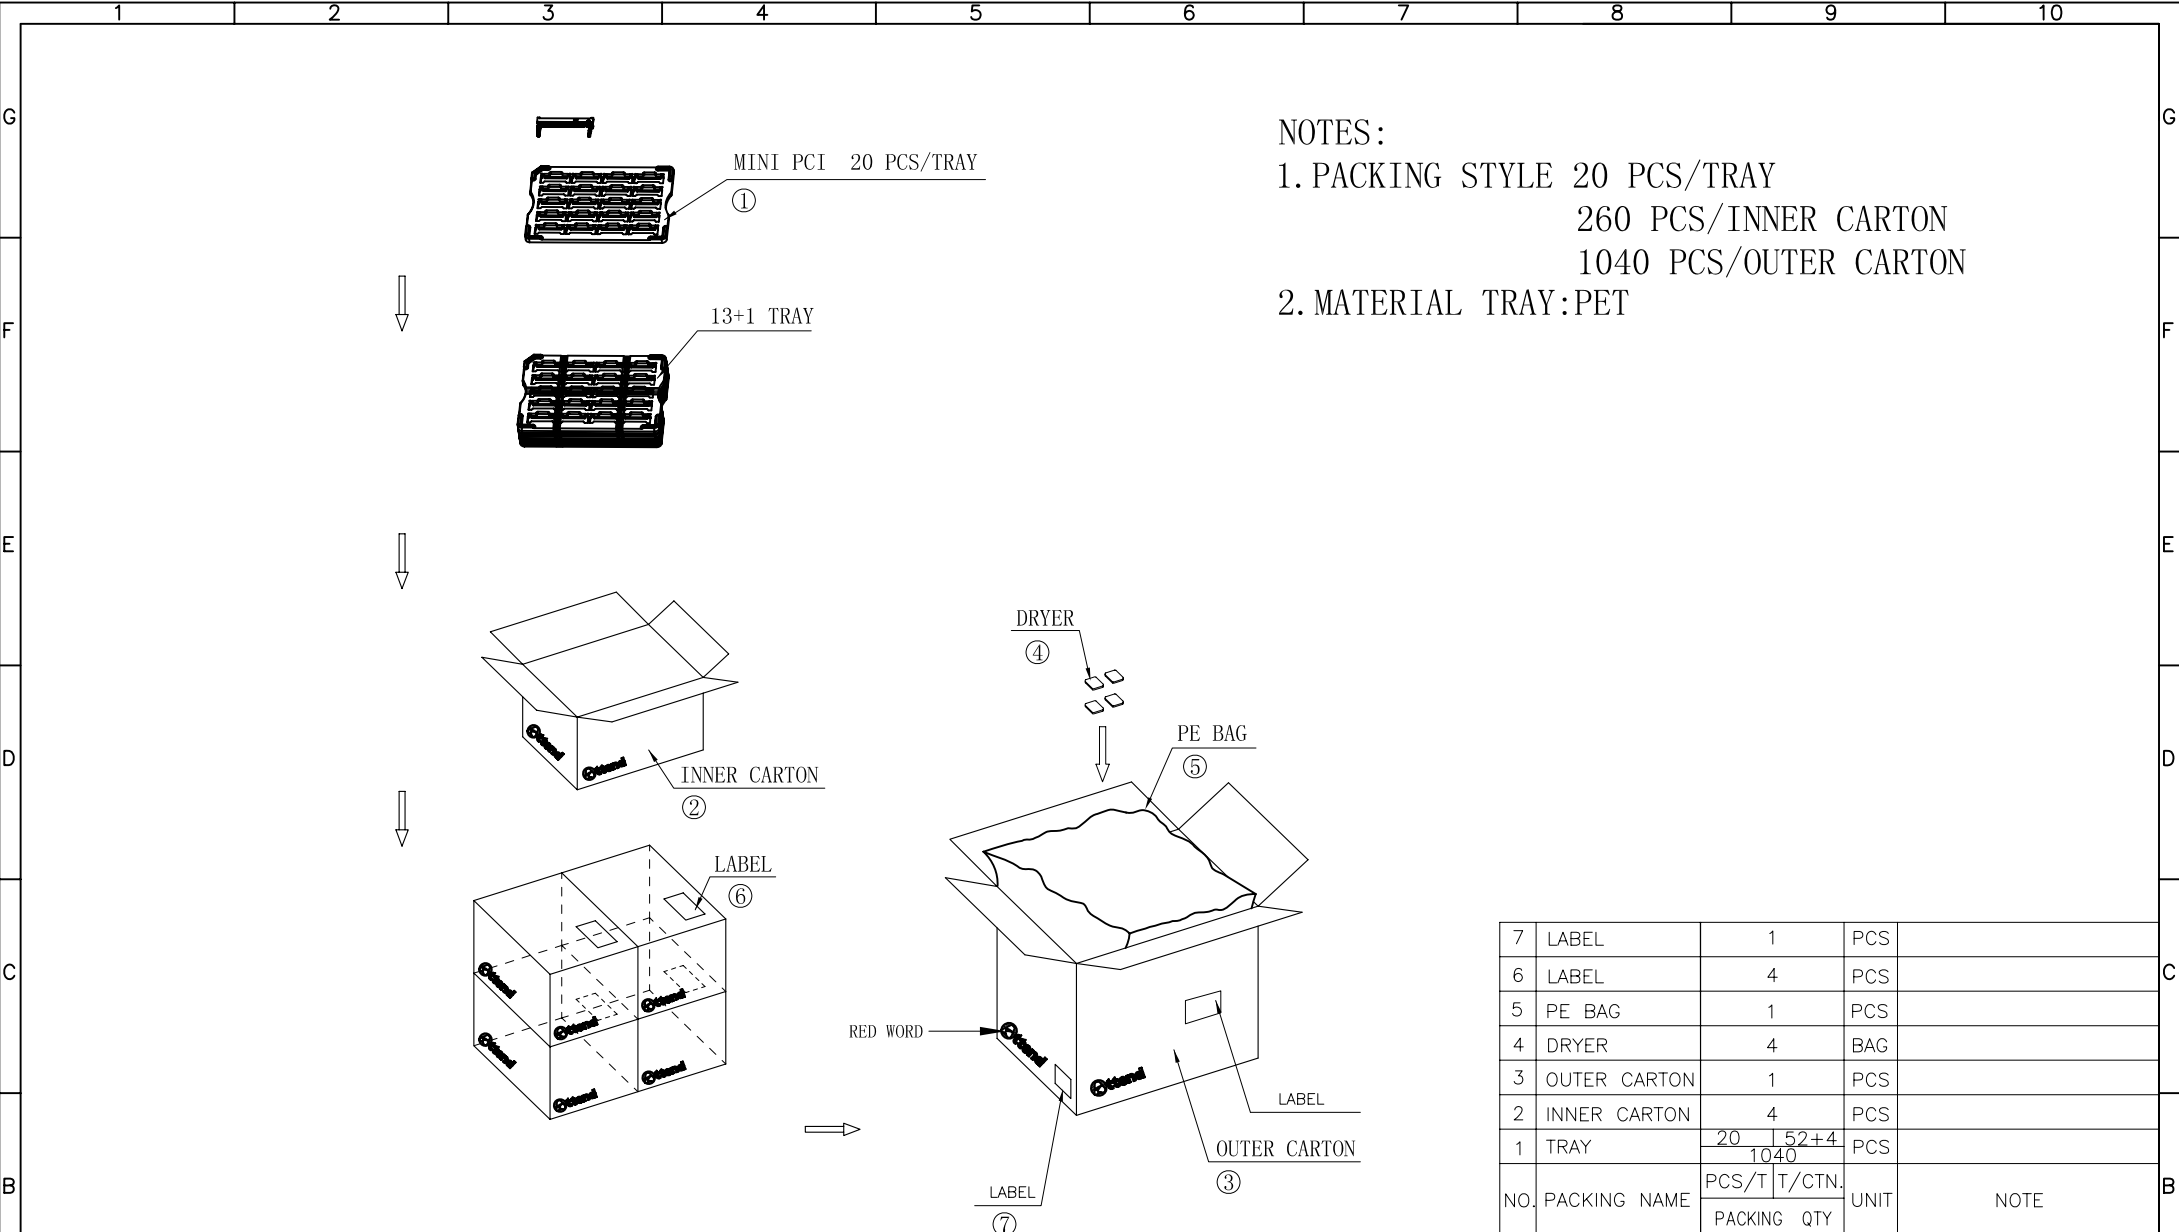

NOTES:

- PACKING STYLE 20 PCS/TRAY
260 PCS/INNER CARTON
1040 PCS/OUTER CARTON
- MATERIAL TRAY:PET

7	LABEL	1	PCS	
6	LABEL	4	PCS	
5	PE BAG	1	PCS	
4	DRYER	4	BAG	
3	OUTER CARTON	1	PCS	
2	INNER CARTON	4	PCS	
1	TRAY	20	52+4	PCS
		1040		
NO.	PACKING NAME	PCS/T	T/CTN.	UNIT
		PACKING	QTY	NOTE

		UNLESS OTHERWISE SPECIFIED TOLERANCE		 ATTEND TECHNOLOGY INC. www.attend.com.tw	
		ANG.	±5		
		0.	±0.3	SCALE: AS SHOWN UNIT: mm DRAWN willis 2009/05/27 CHECKED / / APPROVED / /	
		.0	±0.25		
		.00	±0.20	DRAWN NAME: Mini PCI Socket stand off 5.2mm, Metal grounding type PRODUCT NO. 114B-52B00-R02 FILE NAME: 114B-52B00-R02_D_2	
REV.	DESCRIPTION	DATE	SIZE		
1			A4		