



SIRIUS SAFETY RELAY WITH RELAY ENABLING CIRCUITS (EC),
 24 V AC/DC, 22.5 MM, SCREW TERMINAL,
 EC INSTANTANEOUS: 3S, EC DELAYED: 0S,
 MK: 1NC, AUTOSTART,
 MANUAL START BASIC UNIT UP TO MAX. ERR. SIL CL: 1,
 PL: C;
 AS EXPANSION UNIT UP TO MAX. ERR. SIL CL: 3,
 PL: E;

General technical details:

product brand name		SIRIUS
Product designation		safety relays
Design of the product		for EMERGENCY-STOP units
protection type IP / of the enclosure		IP40
Protection class IP / of the terminal		IP20
Protection against electrical shock		finger-safe
Insulation voltage / rated value	V	300
Ambient temperature		
• during storage	°C	-40 ... +80
• during operating	°C	-25 ... +60
Air pressure		
• according to SN 31205	kPa	90 ... 106
Relative humidity		
• during operating phase	%	10 ... 95
Installation altitude / at a height over sea level / maximum	m	2,000
Resistance against vibration / according to IEC 60068-2-6		5 ... 500 Hz: 0,075 mm
Resistance against shock		8g / 10 ms
Impulse voltage resistance / rated value	V	4,000
EMC emitted interference		EN 60947-5-1

Installation environment relating to EMC		This product is suitable for Class A environments only. It can cause undesired radio-frequency interference in residential environments. If this is the case, the user must take appropriate measures.
Reference code <ul style="list-style-type: none"> • according to DIN 40719 extended according to IEC 204-2 / according to IEC 750 • according to DIN EN 61346-2 		KT F
Number of sensor inputs <ul style="list-style-type: none"> • 1-channel or 2-channel 		1
Design of the cascading		none
Type of the safety-related wiring / of the inputs		single-channel or single-channel and two-channel
Product feature / transverse contact-secure		No
Safety Integrity Level (SIL) <ul style="list-style-type: none"> • according to IEC 61508 		SIL3
SIL claim limit (for a subsystem) / according to EN 62061		1
Performance Level (PL) <ul style="list-style-type: none"> • according to EN ISO 13849-1 		e
Category / according to EN 954-1		3
Category / according to EN ISO 13849-1		3
Hardware fault tolerance / according to IEC 61508		1
Safety device type / according to IEC 61508-2		Type A
PFHD / with high demand rate / according to EN 62061	1/h	0.11E-8
Average probability of failure on demand (PFDavg) / with low demand rate / according to IEC 61508	1/y	0.9899999999999999E-6
T1 value / for proof test interval or service life / according to IEC 61508	a	20
Number of outputs / as contact-affected switching element <ul style="list-style-type: none"> • as NC contact / for reporting function / instantaneous switching • as NO contact / safety-related / instantaneous switching • as NO contact / safety-related / delayed switching 		1 3 0
Number of outputs / as contact-less semiconductor switching element <ul style="list-style-type: none"> • safety-related <ul style="list-style-type: none"> • delayed switching • non-delayed • for reporting function <ul style="list-style-type: none"> • delayed switching • non-delayed 		0 0 0 0
Stop category / according to DIN EN 60204-1		0

General technical details:

Design of the input		
• cascading-input/functional switching		No
• feedback input		Yes
• start input		Yes
Design of the electrical connection / jumper socket		Yes
Operating cycles / maximum	1/h	1,000
Switching capacity current		
• of NO contacts of relay outputs		
• at DC-13		
• at 24 V	A	5
• at 115 V	A	0.2
• at 230 V	A	0.1
• at AC-15		
• at 115 V	A	5
• at 230 V	A	5
• of NC contacts of relay outputs		
• at DC-13		
• at 24 V	A	5
• at 115 V	A	0.2
• at 230 V	A	0.1
• at AC-15		
• at 115 V	A	5
• at 230 V	A	5
Thermal current / of the contact-affected switching element / maximum	A	5
Electrical operating cycles as operating time / typical		100,000
Mechanical operating cycles as operating time / typical		10,000,000
Design of the fuse link / for short-circuit protection of the NO contacts of the relay outputs / required		gL/gG: 6 A, or quick: 10 A
Resistance to direct current / of the cable / maximum	Ω	30
Cable length / between sensor and electronic evaluation device / with Cu 1.5 mm² and 150 nF/km / maximum	m	1,000
Make time / with automatic start		
• for DC / maximum	ms	200
• for AC / maximum	ms	200
Make time / with automatic start / after mains power cut		
• maximum	ms	300
Backslide delay time / after opening of the safety circuits / typical	ms	125
Backslide delay time / at mains power cut		
• typical	ms	125
• maximum	ms	200

Recovery time / after opening of the safety circuits / typical	ms	200
Recovery time / after mains power cut / typical	s	200
Pulse duration		
• of the sensor input / minimum	ms	200
• of the ON pushbutton input / minimum	s	0.15

Control circuit:

Voltage type / of control feed voltage		AC/DC
Control supply voltage frequency		
• 1 / rated value	Hz	50
• 2 / rated value	Hz	60
Control supply voltage / 1 / for DC / rated value	V	24
Control supply voltage / 1 / at 50 Hz / for AC / rated value	V	24
Control supply voltage / 1 / at 60 Hz / for AC / rated value	V	24
operating range factor control supply voltage rated value / of the magnet coil		
• at 50 Hz		
• for AC		0.85 ... 1.1
• at 60 Hz		
• for AC		0.85 ... 1.1
• for DC		0.85 ... 1.2

Installation/mounting/dimensions:

mounting position		any
Mounting type		screw and snap-on mounting
Width	mm	22.5
Height	mm	120
Depth	mm	120

Connections:

Design of the electrical connection		screw-type terminals
Type of the connectable conductor cross-section		
• solid		1x (0.5 ... 4.0 mm ²), 2x (0.5 ... 2.5 mm ²)
• finely stranded		
• with wire end processing		1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²)
Type of the connectable conductor cross-sections / for AWG conductors		
• solid		2x (20 ... 14)
• stranded		2x (20 ... 14)

Product Function:

Product function <ul style="list-style-type: none"> • light barrier monitoring • standstill monitoring • protective door monitoring • automatic start • magnetic switch monitoring Normally closed contact-Normally open contact • rotation speed monitoring • laser scanner monitoring • monitored start-up • light grid monitoring • magnetic switch monitoring Normally closed contact-Normally closed contact • emergency stop function • step mat monitoring 		No No Yes Yes No No No No No Yes No
Suitability for interaction / pressing control		No
Acceptability for application <ul style="list-style-type: none"> • monitoring of floating sensors • monitoring of non-floating sensors • safety cut-out switch • position switch monitoring • EMERGENCY-OFF circuit monitoring • valve monitoring • tactile sensor monitoring • magnetically operated switches monitoring • safety-related circuits 		Yes No Yes Yes Yes No No No Yes
Certificates/approvals:		
Verification of suitability <ul style="list-style-type: none"> • TÜV (German technical inspectorate) certificate • UL-registration • BG BIA certificate 		BG, SUVA, UL, CSA, EN 60204-1, EN ISO 12100, EN 954-1, IEC 61508 Yes Yes Yes

General Product Approval

EMC

Functional Safety /
Safety of Machinery



Declaration of
Conformity

Test Certificates

other



EG-Konf.

[Special Test
Certificate](#)

[Confirmation](#)

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator:


<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WWW/view/en/3TK2821-1CB30/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3TK2821-1CB30

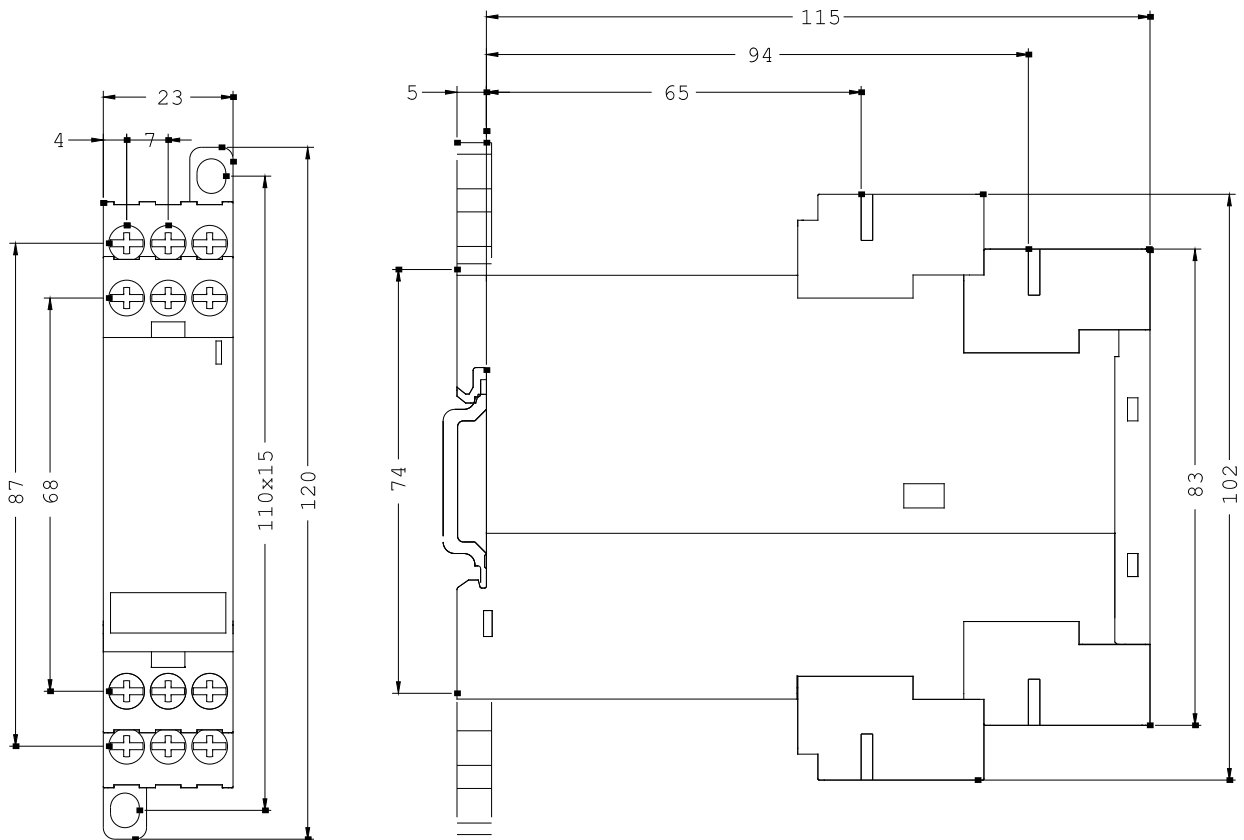

last change:

Jul 14, 2014