

1. Scope of Application

These specifications apply to chip type LED lamp, CITELED, model CL-505S-X-SD-T.

2. Part code

Reference

CL - 505S - X - SD - T

Series _____

505S: Multi-color
Ultra small size

Lighting color _____

X type
R: High brightness Red
G : High brightness Green
B: High brightness Blue

Diffusion _____

SD: Diffused


Shipping mode _____

T Taping (standard)

			Approved	Checked	Drawn	Symbol	CITELED
						Name	CL-505S-X
						Drawing No	
Mark	Date	Description				Appro.	CITIZEN ELECTRONICS CO.,LTD.

3. Outline drawing

Unit: mm
Tolerance: ±0.1

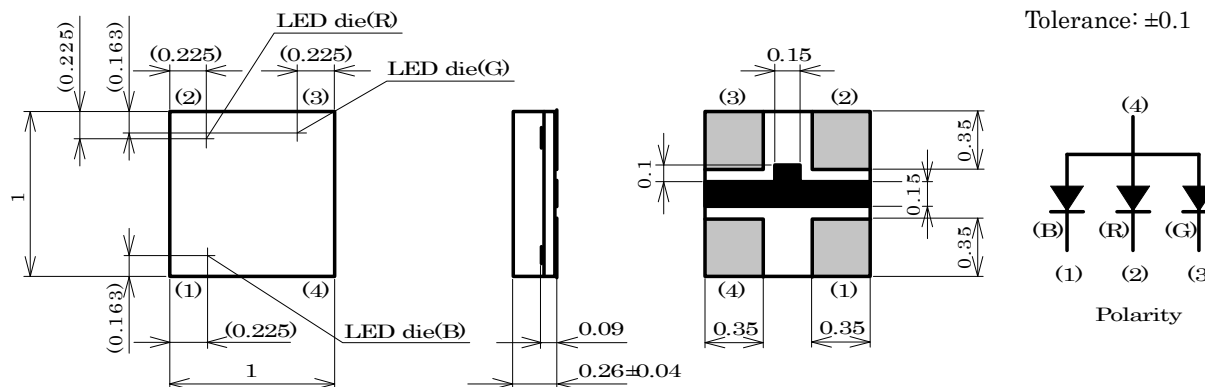

- Any resin unevenness than has no effects on optical characteristics can be used without any quality problem.

4. Performance

(1) Absolute Maximum Rating (Ta=25°C)

Parameter	Symbol	Rating Value	Unit
Total Value of Power Dissipation	P*1	125	mW
Power Dissipation	Pd	R:78 G:76 B:72	mW
Forward Current	IF	R:30 G/B:20	mA
Forward Pulse Current *	IFP	100 *2	mA
Reverse Voltage	VR	4	V
Operating Temperature	Top	-25 ~ +80	°C
Storage Temperature	Tst	-30 ~ +85	°C

*1 P means the Total Value of Power Dissipation when both colors are ON.

*2 Duty ≤ 1/10, Pulse width ≤ 0.1 msec

(2) Electro-optical Characteristic (Ta=25°C)

Parameter	Symbol	Condition	Color	MIN	TYP	MAX	Unit
Forward Voltage	VF	IF=5mA	R	1.36	1.85	2.47	V
			G	2.33	2.70	3.19	
			B	2.33	2.75	3.19	
Reverse Current	IR	VR=4V	R	—	—	100	µA
			G	—	—	2	
			B	—	—	2	
Luminous Intensity *	IV	IF=5mA	R	23	40	—	mcd
			G	91	220	—	
			B	36	65	—	
Dominant Wave length	λd	IF=5mA	R	601	618	629	nm
			G	516	530	540	
			B	461	470	479	

* In accordance with NIST standard

Note 1) The tolerance of Forward Voltage measurement is ±3% at our tester.

Note 2) The tolerance of Luminous Intensity measurement is ±10% at our tester

Note 3) The tolerance of Dominant Wave length measurement is ±2nm at our tester











Note 4) Please be aware that the above electro-optical characteristics are guaranteed when applying the current values shown in the table.

Please consult us when this product is used under any other conditions.

			Approved	Checked	Drawn	Symbol	CITELED
						Name	CL-505S-X
						Drawing No	
Mark	Date	Description	Appro.	CITIZEN ELECTRONICS CO.,LTD.			


Reference

5. Characteristic

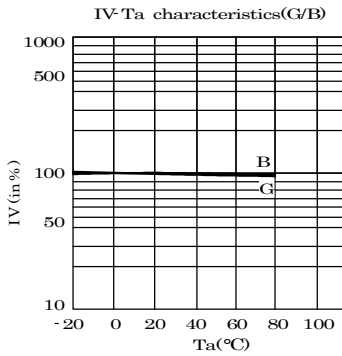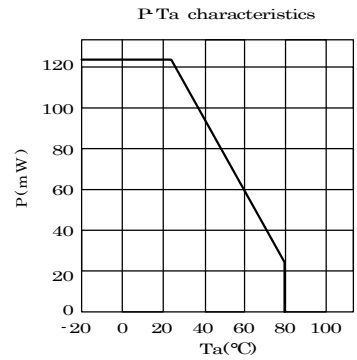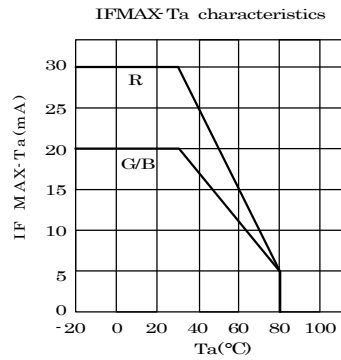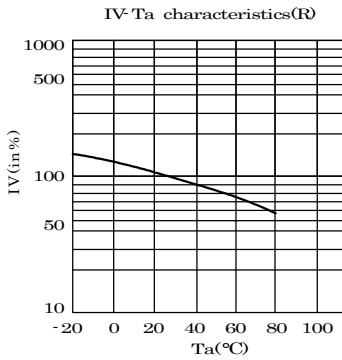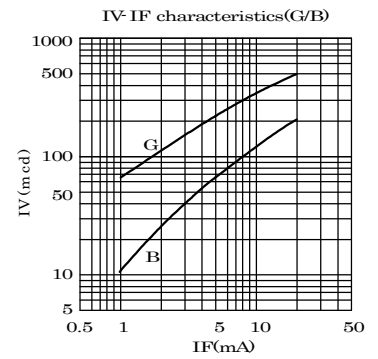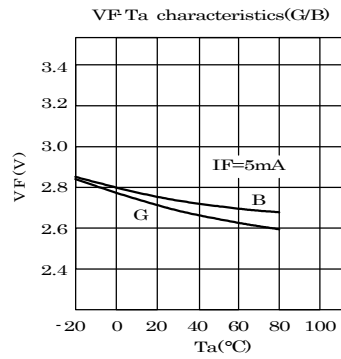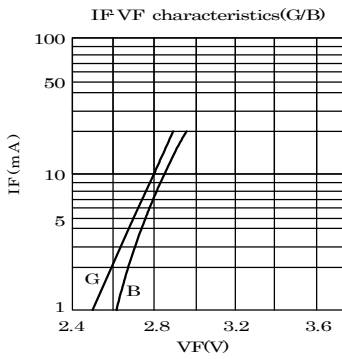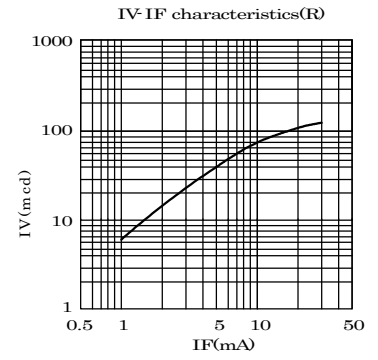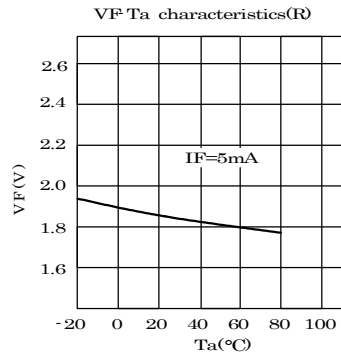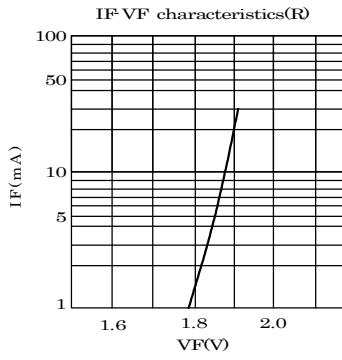


			Approved	Checked	Drawn	Symbol	CITILED
						Name	CL-505S-X
						Drawing No	
Mark	Date	Description	Appro.	CITIZEN ELECTRONICS CO.,LTD.			


Reference




Directive Characteristics (Red X)

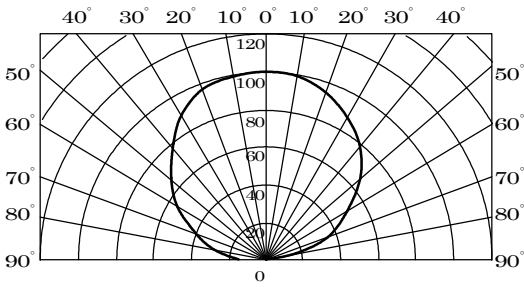


Directive Characteristics (Red Y)

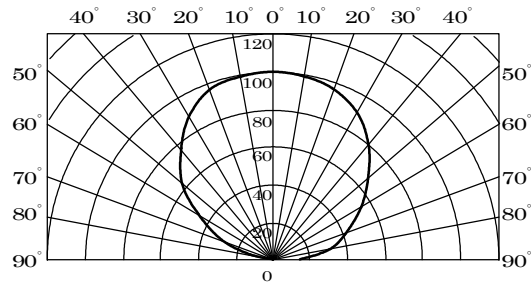


Directive Characteristics (Green X)

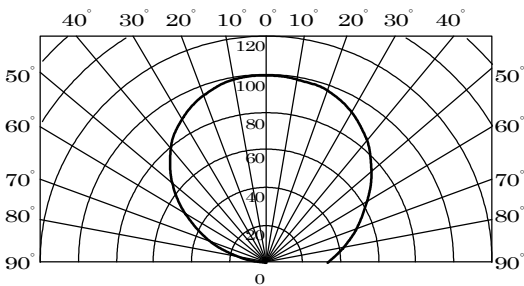


Directive Characteristics (Green Y)

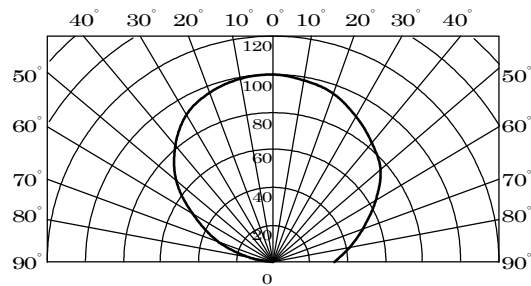


Directive Characteristics (Blue X)

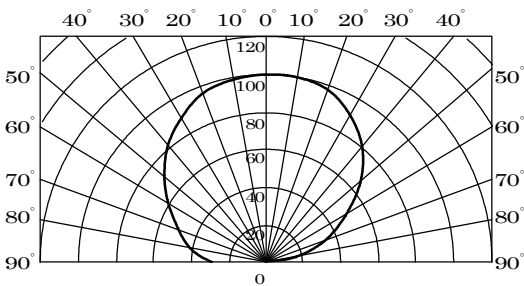


Directive Characteristics (Blue Y)

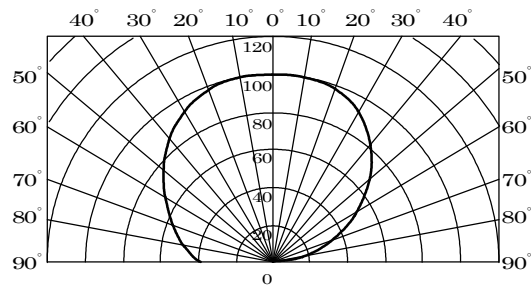

Directive Characteristics (White X)

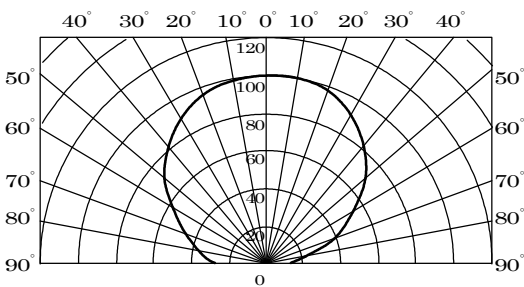

Directive Characteristics (White Y)

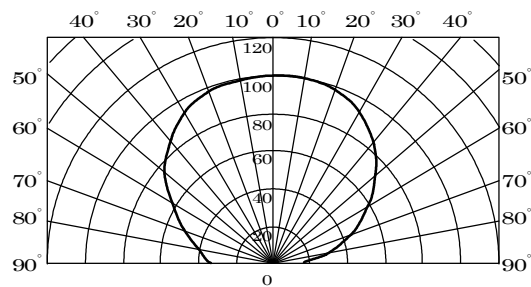

			Approved	Checked	Drawn	Symbol	CITILED
						Name	CL-505S-X
						Drawing No	
Mark	Date	Description	Appro.	CITIZEN ELECTRONICS CO.,LTD.			

6. Reliability

Reference

(1) Details of the tests(With one of the three die emitting)

Test Item	Test Condition
Life Test in Continuous Operation	To operate the test under absolute maximum current rating at $25\pm 3^{\circ}\text{C}$ for 500^{+24}_{-12} hours
Low Temperature Storage Test	$-30^{+3}_{-5}^{\circ}\text{C} \times 500^{+24}_{-12}$ hours
High Temperature Storage Test	$85^{+5}_{-3}^{\circ}\text{C} \times 500^{+24}_{-12}$ hours
Moisture-proof Test	$60 \pm 2^{\circ}\text{C}$, $90 \pm 5\% \text{RH}$ for 500^{+24}_{-12} hours
Thermal Shock Test	$-30^{\circ}\text{C} \times 30$ minutes - $85^{\circ}\text{C} \times 30$ minutes, 5-cycle
Solder Heat Resistance Test	Recommended temperature profile (reflow soldering) $\times 2$, (2 nd test must be started after the samples are stabilized thermally.)

(2) Judgment Criteria of Failure for Reliability Test

Measuring Item	Symbol	Measuring Condition	Judgement Criteria for Failure
Forward Voltage	V_F	$I_F = 5 \text{ mA}$	$>U \times 1.2$
Reverse Current	I_R	$V_R = 4 \text{ V}$	$>U \times 2$
Luminous Intensity	I_V	$I_F = 5 \text{ mA}$	$<S \times 0.5$

U means the upper limit of the specified characteristics. S means the initial value.


Note: Measurement shall be taken between 2 hours and 24 hours, having returned the test pieces to the normal ambient conditions after the completion of each test.

			Approved	Checked	Drawn	Symbol	CITELED
						Name	CL-505S
						Drawing No	
Mark	Date	Description	Appro.	CITIZEN ELECTRONICS CO.,LTD.			


Reference

7. Taping Specifications (in accordance with JIS standard)


(1) Shape and Dimensions of Reel

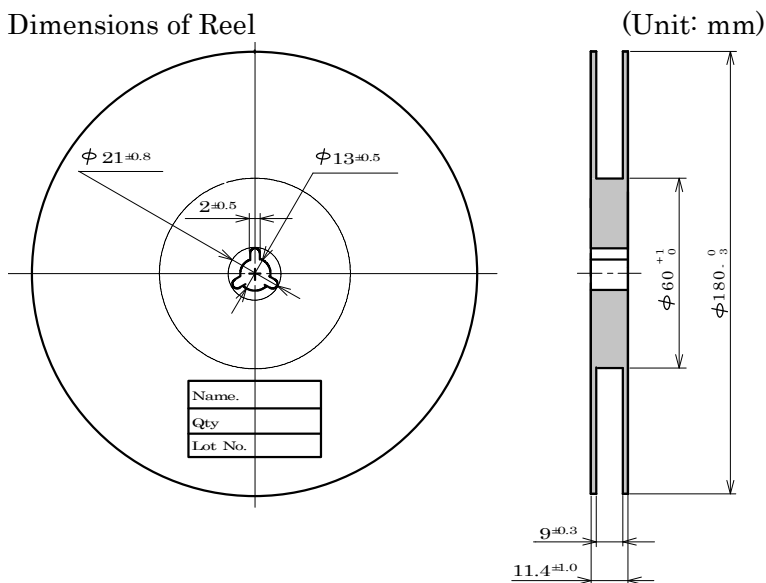

(2) Dimensions of Tape

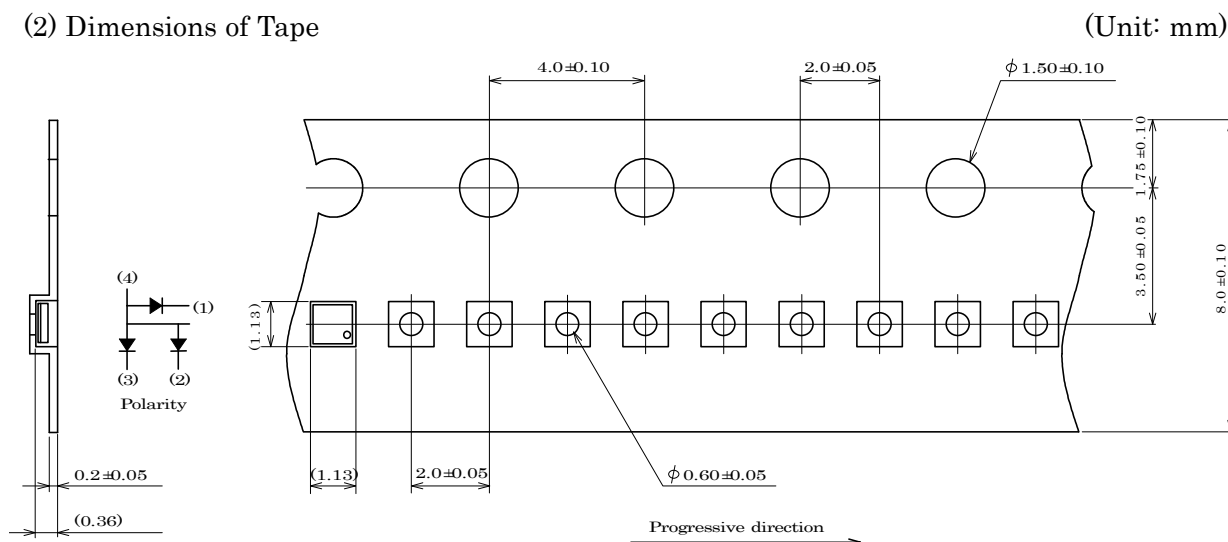

(3) Configuration of Tape

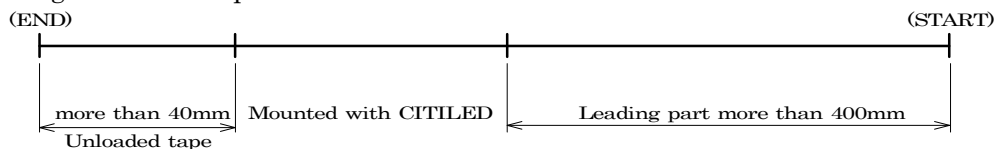

(4) Quantity : 5,000pcs/reel

(Please note that the shipping quantity of this product may be less than 5000 pieces per reel (minimum quantity: 1000 pieces) depending on the shipping quantity, shipping delivery date and other conditions. However, in this case, we will announce to you in advance.)


				Approved	Checked	Drawn	Symbol	CITELED
							Name	CL-505S
							Drawing No	
Mark	Date	Description	Appro.	CITIZEN ELECTRONICS CO.,LTD.				

Reference

8. Packing Specifications

8-1. Moisture-proof Packing

To prevent moisture absorption during transportation and storage, reels are packed in aluminum envelopes.

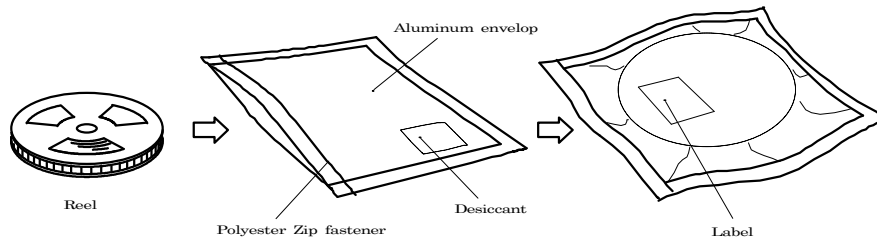

8-2. Storage

To prevent moisture absorption, it is strongly recommended that reels (in bulk or taped) should be stored in the dry box (or the desiccator) with a desiccant as the appropriate storage place. If not, the following is recommended.

- Temperature: 5 ~ 30 °C
- Humidity: 60%RH max.

The devices should be mounted as soon as possible after unpacking. If you store the unpacked reels, please store them in the dry box or seal them into the envelop again.

8-3. Baking

If the devices have been stored over 6 months or unpacked over 7 days, it should be baked under the following conditions.

- Baking conditions: 60°C × 12 hours or more (reeled one)
- 100°C × 45 minutes or more (loose one)

			Approved	Checked	Drawn	Symbol	CITIED
						Name	CL-505S
						Drawing No	
Mark	Date	Description	Appro.	CITIZEN ELECTRONICS CO.,LTD.			

9. Precautions

Reference


9-1. Soldering

(1) Manual soldering

- 1) Solder of 96.5Sn 3Ag 0.5Cu is recommended.
- 2) Before soldering every time, make baking to units. By manual soldering, it is the possibility of crack due to the moisture absorption in the resin portion.
- 3) Use a soldering iron of 25W or smaller. Adjust the temperature of the soldering iron below 350°C.
- 4) Force or stress must not be applied to the resin portion while soldering.
- 5) Finish soldering within 3 seconds.
- 6) Handle the devices only after temperature is cooled down.

(3) Lead free soldering

- 1) Following soldering paste is recommended
 Melting temperature: 216 ~ 220°C.
 Composition: 96.5Sn 3Ag 0.5Cu
- 2) The temperature profile at the top surface of the parts is recommended as shown below.
- 3) It is requested that products should be handled after their temperature has dropped down to the normal room temperature.

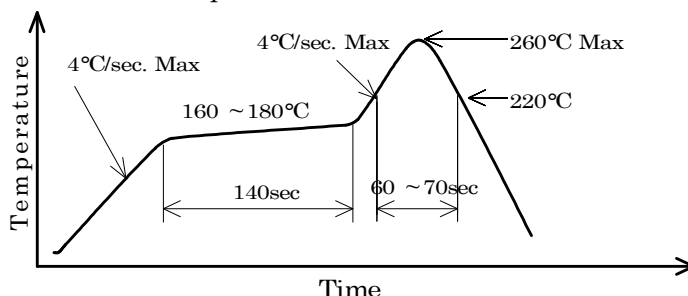

			Approved	Checked	Drawn	Symbol	CITELED
						Name	CL-505S
						Drawing No	
Mark	Date	Description				Appr.	CITIZEN ELECTRONICS CO.,LTD.

Reference

9-2. Washing


- (1) When washing after soldering is needed, following conditions are requested.
 - a) Washing solvent: Pure water
 - b) Temperature, time: 50°C or less × 30 seconds max.
or 30°C or less × 3 minutes max.
 - c) Ultrasonic washing: 300W or less

9-3. Other directions

- (1) It is requested to avoid any stress added to the resin portion while it is heated.
- (2) It is requested to avoid any friction by sharp metal nail etc. to the resin portion.

10. Designing precautions




- (1) The current limiting resistor should be placed in the circuit so that is driven within its rating. Also avoid reverse voltage (over-current) applied instantaneously when ON or OFF.
- (2) When pulse driving current is applied, average current consumption should be within the rating. Also avoid reverse voltage applied when put off.
- (3) Recommended soldering pattern

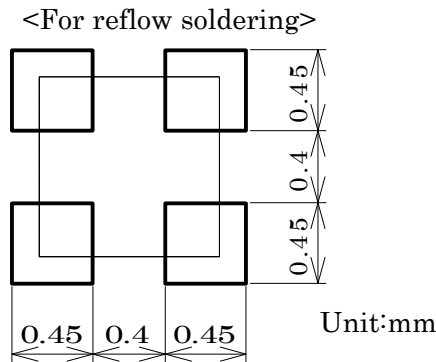

The above dimensions are not the one which guarantee the performance of mountability.

The use of the above pattern is recommended to use after deep study at your site.

- (4) When assembling the circuit board into the finished products, care must be taken to avoid the component parts from touching other parts.
- (5) When using multiple LEDs, it is required to connect a current limiting resistor on each path which the current flows to the LEDs.

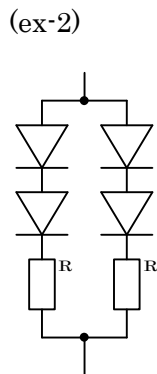

				Approved	Checked	Drawn	Symbol	CITELED
							Name	CL-505S
							Drawing No	
Mark	Date	Description	Appro.	CITIZEN ELECTRONICS CO.,LTD.				